



**NORTEL**

Nortel Communication Server 1000

# Call Detail Recording Fundamentals

Release: 5.5

Document Revision: 02.05

[www.nortel.com](http://www.nortel.com)

---

NN43001-550

Nortel Communication Server 1000  
Release: 5.5  
Publication: NN43001-550  
Document release date: 20 November 2008

Copyright © 2007-2008 Nortel Networks  
All Rights Reserved.

Sourced in Canada

#### LEGAL NOTICE

While the information in this document is believed to be accurate and reliable, except as otherwise expressly agreed to in writing NORTEL PROVIDES THIS DOCUMENT "AS IS" WITHOUT WARRANTY OR CONDITION OF ANY KIND, EITHER EXPRESS OR IMPLIED. The information and/or products described in this document are subject to change without notice.

Nortel, the Nortel Logo, the Globemark, SL-1, Meridian 1, and Succession are trademarks of Nortel Networks.

All other trademarks are the property of their respective owners.

---

# Contents

---

<b>New in this Release</b>	<b>7</b>
Contents	7
About this document	7
Other	10
<b>Overview</b>	<b>11</b>
Contents	11
Product overview	11
Packaging	11
<b>CDR features</b>	<b>13</b>
Contents	13
Introduction	15
CDR Enhancement when Dialing from Non-prime Key	17
Attendant CDR Enhancement	17
Authorization Code	17
Automatic Call Distribution (ACD) CDR Queue (connection) records	18
Bearer Capability in Call Detail Recording	18
Call Types	25
Calling Line Identification in CDR	26
Feature interaction	27
Calling Party Number	27
CDR Answer Supervision	28
CDR 100 Hour Call	31
Call Detail Recording Enhancement	32
CDR Expansion	44
CDR on Busy Tone	44
Internal Call Detail Recording	55
CDR on Redirected Incoming Calls	56
CDR on TTY	58
CDR with Charge Account	58
CDR with Outpulsed Digits	59
Coordinated Dialing Plan with CDR Enhancement	62
Dialed Number Identification Service (DNIS)	63
End-to-End Signaling (EES)	64

Enhanced Malicious Call Trace	65
Feature Group D (FGD) Automatic Number Identification	68
Flexible CDR Digit Suppression	69
Format CDR	70
In-Band Automatic Number Identification	71
Japan Central Office Trunks	71
M911 Enhancements: Call Abandon and MADN Display Coordination	72
Time to Answer	73
Meridian 1 Packet Handler (MPH)	77
Message Registration	78
Multi-Customer Operation	81
Multi-Frequency Compelled signaling	82
Multi-Tenant Service	82
Multiple Appearance Directory Numbers	84
Network Metering CDR Enhancement	84
NPI and TON in CDR	86
Priority to CDR	95
Public Network Feature Invocation records	95
Public Service Telephone Network (PSTN) Three Party Conferencing	96
R2MFC CNI/CDR Enhancements	96
Scheduled Access Restriction	116
Stand-alone and network outgoing non-metered CDR Transfer Enhancement (CDRX)	116
Station activity Call Detail Recording	117
Terminating Carriage Control	119

---

<b>Administration</b>	<b>121</b>
-----------------------	------------

Contents	121
Introduction	121
Feature implementation	121
Establishing baud rates	132

---

<b>Call record fields</b>	<b>135</b>
---------------------------	------------

Contents	135
Introduction	135
TTY record fields	137

---

<b>Teletype call record output</b>	<b>161</b>
------------------------------------	------------

Contents	161
Introduction	161
Record output and storage	161
More about TTY output	162
Reversed Wired CO trunk	162
Old and New Format CDR	162

---

## **Call record types** **175**

Contents	175
Introduction	176
B record (Abandoned call)	177
N (Normal) record	177
S (Start) record	180
X record (Transfer)	183
E record (End)	184
I record (Initialization)	185
T record (Time stamp)	185
A record (Authorization Code/Scheduled Access Restriction)	185
C record (Charge Account)	186
M record (Charge Conference)	188
P record (Calling Party Number)	188
F, R, and Q records (ACD call connections)	189
L record (Internal CDR)	190
G record (Internal Meridian 1 Packet Handler data call)	192
H record (External Meridian 1 Packet Handler data call)	192
D record (Station Activity)	192
Y record (Public Network Feature Invocation)	193
Priority Connection Record	196
CDR record sequencing	197

---

## **Examples of call records** **199**

Contents	199
Introduction	200
Authorization Code	201
Authorization Code and Call Transfer	202
Charge Account with AUXID	203
Calling Party Number	204
Charge Conference Example 1	205
Charge Conference Example 2	207
Charge Conference Example 3	208
Call Transfer and Charge Account features	210
Metered Transferred Call	211
Multi-Tenant	214
Calling Line Identification (CLID)	214
Calling Line Identification (CLID) on a tandem call	215
CDR with Outpulsed Digits	216
In-Band Automatic Number Identification	219
Feature Group D Automatic Number Identification	219
Abandoned Call	220
911 Abandoned Call	221

Call Transfer, Charge Account, and Time to Answer features	221
Metered Transferred Call and Time to Answer	222
Attendant CDR Enhancement for outgoing non-metered CO trunks	223
CDR Call Transfer Enhancement	224
CDR Call Transfer Enhancement with network calls	228
Station Activity Record	235
Public Network Feature Invocation Record	236
CDR 100 Hour Call	236

---

## New in this Release

---

This section outlines the new or updated hardware and features in *Call Detail Recording Fundamentals (NN43001-550)* () Release 5.5 relative to Release 5.0. This section also provides information about this document.

### Contents

This section contains information on the following topics:

[“About this document” \(page 7\)](#)

[“Other” \(page 10\)](#)

### About this document

This document is a global document. Contact your system supplier or your Nortel representative to verify that the hardware and software described are supported in your area.

### Subject

This document provides the following information on Call Detail Recording (CDR):

- an overview of CDR features
- administration options
- record type descriptions
- record field descriptions
- record output formats
- record output examples

### Note on legacy products and releases

This NTP contains information about systems, components, and features that are compatible with Nortel Communication Server 1000 software. For more information on legacy products and releases, click the **Technical Documentation** link under **Support & Training** on the Nortel home page:

[www.nortel.com](http://www.nortel.com)

### Applicable systems

This document applies to the following systems:

- Communication Server 1000E (CS 1000E) CP PII, CP PIV and CP PM
- Communication Server 1000M Single Group (CS 1000M SG) CP PII, CP PIV
- Communication Server 1000M Multi Group (CS 1000M MG) CP PII, CP PIV
- Meridian 1 PBX 11C Chassis
- Meridian 1 PBX 11C Cabinet
- Meridian 1 PBX 61C
- Meridian 1 PBX 81C

**Note:** When upgrading software, memory upgrades may be required on the Signaling Server, the Call Server, or both.

**System migration** When particular Meridian 1 systems are upgraded to run CS 1000 Release 5.5 software and configured to include a Signaling Server, they become CS 1000 systems. [Table 1 "Meridian 1 systems to CS 1000 systems" \(page 8\)](#) lists each Meridian 1 system that supports an upgrade path to a CS 1000 system.

**Table 1**  
**Meridian 1 systems to CS 1000 systems**

This Meridian 1 system	Maps to this CS 1000M system
Meridian 1 PBX 11C Chassis	CS 1000E
Meridian 1 PBX 11C Cabinet	CS 1000E
Meridian 1 PBX 61C	CS 1000M Single Group
Meridian 1 PBX 81C	CS 1000M Multi Group

For more information, see one or more of the following NTPs:

- *Meridian 1 Small System Upgrade Procedures (NN43011-458) ()*
- *Communication Server 1000M and Meridian 1 Large System Upgrade Procedures (NN43021-458) ()*
- *Communication Server 1000E Upgrade Procedures (NN43041-458) ()*

### Intended audience

This document is intended for individuals responsible for CDR administration.

## Conventions

**Terminology** In this document, the following systems are referred to generically as "system":

- Communication Server 1000M (CS 1000M)
- Communication Server 1000E (CS 1000E)
- Meridian 1

The following systems are referred to generically as "Small System":

- Meridian 1 PBX 11C Chassis
- Meridian 1 PBX 11C Cabinet

The following systems are referred to generically as "Large System":

- Communication Server 1000M Single Group (CS 1000M SG)
- Communication Server 1000M Multi Group (CS 1000M MG)
- Meridian 1 PBX 61C
- Meridian 1 PBX 81C

## Related information

This section lists information sources that relate to this document.

### NTPs

The following NTPs are referenced in this document:

- *Dialing Plans Reference (NN43001-283) ()*
- *Circuit Card Reference (NN43001-311) ()*
- *IP Peer Networking Installation and Commissioning (NN43001-313) ()*
- *Features and Services (NN43001-506) ()*
- *Software Input Output Administration (NN43001-611) ()*
- *Automatic Call Distribution Fundamentals (NN43001-551) ()*
- *ISDN Primary Rate Interface Features Fundamentals (NN43001-569) ()*
- *Traffic Measurements Formats and Output Reference (NN43001-750) ()*
- *Communication Server 1000M and Meridian 1 Large System Planning and Engineering (NN43021-220) ()*

### Online

To access Nortel documentation online, click the **Technical Documentation** link under **Support & Training** on the Nortel home page:

[www.nortel.com](http://www.nortel.com)

### CD-ROM

To obtain Nortel documentation on CD-ROM, contact your Nortel customer representative.

## Other

### Revision history

<b>November 2008</b>	Standard 02.05. This document is up-issued to include the content in the chapter Administration.
<b>October 2008</b>	Standard 02.04. This document is up-issued to include the content in the chapter CDR features.
<b>September 2008</b>	Standard 02.03. This document is up-issued to show up CDR enhancement prompts in Call Detail Recording.
<b>January 2008</b>	Standard 02.02. This document is up-issued to include corrections for configuring a calling party number key on a Meridian 1 proprietary phone.
<b>December 2007</b>	Standard 02.01. This document is issued to support Nortel Communication Server 1000 Release 5.5.
<b>May 2007</b>	Standard 01.02. This document is up-issued to support changes in Communication Server 1000 Release 5.0
<b>May 2007</b>	Standard 01.01. This document is issued to support Communication Server 1000 Release 5.0. This document is renamed Call Detail Recording Fundamentals and contains information previously contained in the following legacy document, now retired: <i>Call Detail Recording: Description and Formats (553-3001-350)</i> (). No new content has been added for Communication Server 1000 Release 5.0. All references to Communication Server 1000 Release 4.5 are applicable to Communication Server 1000 Release 5.0.

---

# Overview

---

## Contents

This section contains information on the following topics:

[“Product overview” \(page 11\)](#)

[“Packaging” \(page 11\)](#)

## Product overview

The Call Detail Recording (CDR) feature provides information on incoming and outgoing calls for accounting and administration purposes. The information is assembled by software and sent through Serial Data Interface (SDI) ports to any EIA RS-232 compatible output or storage device. Teletypewriters (TTY) and printers are examples of output devices. Single-port or Multiport CDR storage systems are examples of storage devices.

## Packaging

[Table 2 "CDR software packages" \(page 11\)](#) lists packages that affect information output in CDR. Consult your Nortel representative for information regarding your specific system requirements.

**Table 2**  
**CDR software packages**

Feature Name	Package Mnemonic	Package Number
Call Detail Recording (CDR) Base	CDR	4
Multi-Customer	CUST	2
CDR on Teletype	CTY	5
End-To-End Signaling	EES	10
Automatic Number Identification	ANI	12
Charge Account	CHG	23
Charge Account/Authorization code Base	CAB	24

**Table 2**  
**CDR software packages (cont'd.)**

<b>Feature Name</b>	<b>Package Mnemonic</b>	<b>Package Number</b>
Basic Authorization code	BAUT	25
Network Automatic Route Selection	NARS	58
Coordinated Dialing Plan	CDP	59
Network Authorization code	NAUT	63
Automatic Call Distribution CDR queue records	CDRQ	83
Multi-Tenant Service	TENS	86
Japan Central office Trunks	JPN	97
Dialed Number Identification System	DNIS	98
Message Registration	MR	101
Internal CDR	ICDR	108
Calling Line Identification in CDR	CCDR	118
Multi-Frequency Compelled signaling	MFC	128
International Supplementary Features	SUPP	131
CDR Expansion	CDRE	151
Feature Group D	FGD	158
Scheduled Access Restriction	SAR	162
Meridian 911	M911	224
Format CDR	FCDR	234
Meridian 1 Packet Handler	MPH	248
Station activity Call Detail Recording	SCDR	251
Call Detail Recording Enhancement	CDRX	259
NI2	NI2	291
CDR on Busy Tone	FCDR	234

---

# CDR features

---

## Contents

This section contains information on the following topics:

[“Introduction” \(page 15\)](#)

[“Attendant CDR Enhancement” \(page 17\)](#)

[“Authorization Code” \(page 17\)](#)

[“Automatic Call Distribution \(ACD\) CDR Queue \(connection\) records” \(page 18\)](#)

[“Bearer Capability in Call Detail Recording” \(page 18\)](#)

[“Call Types” \(page 25\)](#)

[“Calling Line Identification in CDR” \(page 26\)](#)

[“Calling Party Number” \(page 27\)](#)

[“CDR Answer Supervision” \(page 28\)](#)

[“CDR 100 Hour Call” \(page 31\)](#)

[“Call Detail Recording Enhancement” \(page 32\)](#)

[“CDR Expansion” \(page 44\)](#)

[“CDR on Busy Tone” \(page 44\)](#)

[“Internal Call Detail Recording” \(page 55\)](#)

[“CDR on Redirected Incoming Calls” \(page 56\)](#)

[“CDR on TTY” \(page 58\)](#)

“CDR with Charge Account” (page 58)

“CDR with Outpulsed Digits” (page 59)

“Coordinated Dialing Plan with CDR Enhancement” (page 62)

“Dialed Number Identification Service (DNIS)” (page 63)

“End-to-End Signaling (EES)” (page 64)

“Enhanced Malicious Call Trace” (page 65)

“Feature Group D (FGD) Automatic Number Identification” (page 68)

“Flexible CDR Digit Suppression” (page 69)

“Format CDR” (page 70)

“In-Band Automatic Number Identification” (page 71)

“Japan Central Office Trunks” (page 71)

“M911 Enhancements: Call Abandon and MADN Display Coordination” (page 72)

“Time to Answer” (page 73)

“Meridian 1 Packet Handler (MPH)” (page 77)

“Message Registration” (page 78)

“Multi-Customer Operation” (page 81)

“Multi-Frequency Compelled signaling” (page 82)

“Multiple Appearance Directory Numbers” (page 84)

“Multiple Appearance Directory Numbers” (page 84)

“Network Metering CDR Enhancement” (page 84)

“Task summary list” (page 55)

“Priority to CDR” (page 95)

“Public Network Feature Invocation records” (page 95)

[“Public Service Telephone Network \(PSTN\) Three Party Conferencing” \(page 96\)](#)

[“R2MFC CNI/CDR Enhancements” \(page 96\)](#)

[“Scheduled Access Restriction” \(page 116\)](#)

[“Stand-alone and network outgoing non-metered CDR Transfer Enhancement \(CDRX\)” \(page 116\)](#)

[“Station activity Call Detail Recording” \(page 117\)](#)

[“Terminating Carriage Control” \(page 119\)](#)

## Introduction

This chapter contains brief descriptions of base CDR package features as well as optional CDR features. Some features require the Format CDR (FCDR) package 234. [Table 3 "CDR features list that shows which features require FCDR package 234." \(page 15\)](#) lists the CDR features and shows whether FCDR package is required.

**Table 3**  
**CDR features list that shows which features require FCDR package 234.**

Features	FCDR required?
Priority to CDR	No
Call types	No
Multiple Appearance Directory Numbers (MADNs)	No
Calling Party Number	No
Call Detail Recording Enhancement	Yes
CDR Answer Supervision	No
Flexible CDR Digit Suppression	No
Terminating Carriage Control	No
Multi-Customer operation	No
Multi-Tenant Service	No
In-Band Automatic Number Identification	No
CDR with Outpulsed Digits	No
Coordinated Dialing Plan with CDR Enhancement	No
CDR with Charge Account	No
Authorization Code	No
Japan Central Office Trunks	No

**Table 3**  
**CDR features list that shows which features require FCDR package 234. (cont'd.)**

Features	FCDR required?
Dialed Number Information Service on CDR	No
Message Registration	No
Multi-Frequency Compelled signaling	No
Scheduled Access Restriction	No
End-to-end signaling	No
Attendant CDR Enhancement (Release 20 & later)	Yes
Network Metering CDR Enhancement (Release 20 & later)	Yes
Format CDR	Yes
Enhanced Malicious Call Trace	No
CDR on Teletype	No
Automatic Call Distribution CDR Queue records	No
Internal Call Detail Recording	No
Calling Line Identification in CDR	No
CDR Expansion	No
Feature Group D Automatic Number Identification	No
Stand-alone and network outgoing non-metered CDR Transfer Enhancement (CDRX)	Yes
Time to Answer	Yes
CDR on Redirected Incoming Calls	No
Public Network Feature Invocation records	No
"Public Service Telephone Network (PSTN) Three Party Conferencing" (page 96)	No
Meridian 1 Packet Handler	No
Stand-alone and network outgoing non-metered CDR Transfer Enhancement	No
Station activity Call Detail Recording	No
CDR 100 Hour Call	Yes
CDR on Busy Tone	Yes
R2MFC CNI/CDR Enhancements	Yes
NPI and TON in CDR Tickets	Yes
Bearer Capability in CDR	Yes

## CDR Enhancement when Dialing from Non-prime Key

Dialing from non prime key: When an external call is set up from a digital set with multiple DNs programmed using any key other than the Prime DN key, the Meridian 1 outputs a CDR N-record at the end of the call. The ORIG-ID field of the N-record holds the value of the Prime Key DN.

A new class-of-service (CLS) is provided for digital sets. When the CLS is OKCH then the ORIG-ID field of the N-record will contain the actual originating DN.

When the CLS is PKCH then the ORIG-ID field of the N-record will contain the Prime DN. PKCH is the default setting.

## Attendant CDR Enhancement

Trunk calls originated by the attendant and extended to an internal station produce S (Start) records when the attendant releases the call. The S records indicate the attendant as the originating party and the outgoing trunk as the terminating party. The duration of the call is recorded as the time the attendant spent on the call until the Release key was pressed.

When either the internal station or the far end disconnects, an E (End) record is generated. The E record is generated against the internal station. The duration of the call is recorded from the moment the attendant pressed the Release key until the call is disconnected.

## Authorization Code

When the Authorization Code is used and ACDR is set to YES in LD 88, the Authorization Code feature generates A (Authorization Code/Scheduled Access Restriction) records.

### Feature implementation

**Table 4**  
**LD 88 - Configure Authorization Codes to print in CDR.**

Prompt	Response	Description
REQ	CHG	Change existing data block.
TYPE	AUB	Authcode
	RAUB	Room Authcode
CUST	xx	Customer number as defined in LD 15.
...		
ACDR	(NO) YES	Authorization codes in CDR

## Automatic Call Distribution (ACD) CDR Queue (connection) records

The Integrated ACD/CDR Call Processing Interface feature uses connection records. Connection records tell the customer-provided computer, in real-time, which Automatic Call Distribution (ACD) agent is connected to which trunk. ACD/CDR Queue (CDRQ) package 83 is required.

Connection records are generated on incoming calls when a connection is established between an agent and a trunk and on each conference and transfer connection. This feature is implemented using a CDR-TTY (CTY) port which provides a data link to the customer-provided computer.

### Feature implementation

Table 5

LD 16 - Configure the trunk route for ACD CDR Queue connection records.

Prompt	Response	Description
REQ	CHG	Change existing data block.
TYPE	RDB	Route Data Block
CUST	xx	Customer number as defined in LD 15.
ROUT		Route number
	0-511	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-127	Range for Small System
DES	x...x	Designator field for trunk (0-16 alphanumeric characters)
TKTP	a...a	Trunk Type
...		
CDR	(NO) YES	Call Detail Recording
- QREC	(NO) YES	Q Records

## Bearer Capability in Call Detail Recording

The Bearer Capability in Call Detail Recording feature allows the operator to use bearer capability information to apply different rates based on the type of trunks.

ISDN calls provide information on the bearer capabilities used for each trunk call. Bearer capability information also provides trunk characteristics for each call, such as rate, voice or data dedicated, and packet or circuit mode transfer.

The Bearer Capability in CDR feature applies for CDR involving trunks only. For non-trunk calls, such as phone-to-phone calls, blank characters are output. For all trunks not listed below, "99" is output in the CDR.

The Bearer Capability in CDR feature supports the following trunks:

- EuroISDN trunks
- Asia Pacific trunks
- MCDN trunks
- QSIG trunks
- DTI and DTI2 trunks
- DASS2 trunks and DPNSS1 trunks
- North American ISDN trunks

[Table 6 "Bearer capability information printed in the CDR record" \(page 19\)](#) shows the bearer capability codes printed in the CDR record and the meaning of each code.

**Table 6**  
**Bearer capability information printed in the CDR record**

Code	Meaning
01	Circuit mode speech
02	Circuit mode 3.1 kHz
03	Circuit mode unrestricted 64 kbit/s digital information transfer
04	Circuit mode unrestricted 64 kbit/s digital information transfer rate adapted from 56 kbit/s
05	Packet mode unrestricted digital information transfer
06	Circuit mode 7 kHz audio or video telephony
07	Circuit mode restricted 64 kbit/s digital information transfer
08	Circuit mode video
99	Unknown or nonexistent

### **Bearer Capability in Call Detail Recording for ISDN**

For ISDN protocols, the bearer capability is contained in the BCAP Information Element (IE). The IE is a mandatory field of the SETUP message sent to initiate a call. [Table 7 "Correspondence between the ISDN BCAP Information Element and the CDR code" \(page 20\)](#) shows the correspondence between the ISDN BCAP IE and the code for CDR. When the received BCAP fields do not match the values shown in [Table 7 "Correspondence between the ISDN BCAP Information Element and the CDR code" \(page 20\)](#), "99" is output.

**Table 7**  
**Correspondence between the ISDN BCAP Information Element and the CDR code**

Code	Byte 3 bits 4-0 information transfer capability	Byte 4 bits 6-5 transfer mode	Byte 5 bits 4-0 user information layer 1 protocol	Meaning of CDR code
01	00000	00	/	Circuit mode speech
02	10000	00	/	Circuit mode 3.1 kHz audio
03	01000	00	/	Circuit mode unrestricted 64 kbit/s digital information transfer
04	01000	00	00001 or 01000	Circuit mode unrestricted 64 kbit/s digital information transfer rate adapted from 56 kbit/s  <b>Note:</b> See byte 5, bits 4-0, user rate must be 01111 (56 kbit/s).
05	01000	01	/	Packet mode unrestricted digital information transfer
06	10001	00	/	Circuit mode 7 kHz audio or video telephony
07	01001	00	/	Circuit mode restricted 64 kbit/s digital information transfer
08	11000	00	/	Circuit mode video

### Bearer Capability in Call Detail Recording for DASS/DPNSS

For DPNSS and DASS2 protocols, the bearer capability is contained in the Service Indicator Code (SIC). The SIC is a mandatory field of the Initial Service Request Message (ISRM) sent to initiate a call. It contains at least one byte and a maximum of two bytes. [Table 8 "Correspondence between the DPNSS Service Indicator Code and the CDR code" \(page 21\)](#) shows the correspondence between the DPNSS SIC and the CDR code. [Table 9 "Correspondence between the DASS2 Service Indicator Code and the CDR code" \(page 21\)](#) shows the correspondence between the DASS SIC and the CDR code. When the received SIC fields do not match the values shown in [Tables Table 8 "Correspondence between the](#)

DPNSS Service Indicator Code and the CDR code" (page 21) and Table 9 "Correspondence between the DASS2 Service Indicator Code and the CDR code" (page 21), "99" is output.

**Table 8**  
**Correspondence between the DPNSS Service Indicator Code and the CDR code**

Code	Byte 1 bits 6-4	Byte 1 bits 3-0	Byte 2 bits 2-0	Byte 2 bits 6-4	Meaning of CDR code
01	001	/	/	/	Circuit mode speech
02	Not supported				Circuit mode 3.1 kHz audio
03	010	0000	/	/	Circuit mode unrestricted 64 kbit/s digital information transfer
04	Not supported				Circuit mode unrestricted 64 kbit/s digital information transfer rate adapted from 56 kbit/s
05	010 or 011	/	100	x1x	Packet mode unrestricted digital information transfer
06	Not supported				Circuit mode 7 kHz audio or video telephony
07	Not supported				Circuit mode restricted 64 kbit/s digital information transfer
08	Not supported				Circuit mode video

**Table 9**  
**Correspondence between the DASS2 Service Indicator Code and the CDR code**

Code	Byte 1 bits 6-4	Byte 1 bits 3-0	Byte 2 bits 2-0	Byte 2 bits 6-4	Meaning of CDR code
01	000	/	/	/	Circuit mode speech
	001	0000 or 0010	/	/	
02	001	>=1000 not 1111	/	/	Circuit mode 3.1 kHz audio

Table 9

Correspondence between the DASS2 Service Indicator Code and the CDR code (cont'd.)

Code	Byte 1 bits 6-4	Byte 1 bits 3-0	Byte 2 bits 2-0	Byte 2 bits 6-4	Meaning of CDR code
03	010	0000 if 2 bytes	/	/	Circuit mode unrestricted 64 kbit/s digital information transfer
04	Not supported				Circuit mode unrestricted 64 kbit/s digital information transfer rate adapted from 56 kbit/s
05	010 or 011	/	100	xlx	Packet mode unrestricted digital information transfer
06	Not supported				Circuit mode 7 kHz audio or video telephony
07					Circuit mode restricted 64 kbit/s digital information transfer
08					Circuit mode video

**Bearer Capability in Call Detail Recording for DTI/DTI2**

For DTI and DTI2 trunks, the bearer capability is set during the call processing in LD 16 according to the value entered at the DSEL prompt in the Route Data Block.

For both DTI and DTI2 trunks:

- For a voice call, 01 is output in the CDR.
- For a data call, 03 is output in the CDR.

Additionally, for DTI2 trunks, if the call is voice and data, 99 is output.

**Bearer Capability in CDR**

The CDR format is composed of three lines. Each printed item is assigned a line number and a location on that line. If features are restricted or not equipped, the corresponding field in the CDR record is filled with spaces. The first line is 87 characters long; the second line is 86 characters long.

The bearer capability information is at the end of the third line. The bearer capability information is located at position 49-50.

Table 10 "Third line of the new CDR format" (page 23) shows the format of the third line of CDR records. The BCAP field is in **bold**.

The BCAP field is filled with blank characters if:

- the calls involve phones only, or
- the BCAP prompt is set to NO (In LD 15, Type = CDR; CDR = YES; BCAP = NO.)

The bearer capability information is present in all CDR records involving trunks.

**Table 10**  
**Third line of the new CDR format**

Position	Content	Description
1	blank	
2	&	Third line of TTY
3 - 13	time to answer	Time To Answer ringing/total waiting
14	blank	
15 - 30	blid	Billing Line Identification
31	blank	
32 - 38	cab	M911 Call Abandon tag
40 - 42	cdr100h	100-Hour Duration
43	blank	
44 - 45	npi	CLID Numbering Plan Identification
46	blank	
47	ton	CLID Type of Number
48	blank	
<b>49 - 50</b>	<b>BCAP</b>	<b>Bearer Capability</b>
51	blank	

### Operating parameters

The Bearer Capability in CDR requires the new CDR format (that is, FCDR = NEW in LD 17).

If both the originating and terminating sides are trunks, the bearer capability information is taken from the incoming trunk.

If an initialization (INIT) occurs during an established trunk call, the bearer capability information is lost and "99" is output.

**Feature interactions**

**ISDN Bearer Capability Information Element** The Bearer Capability in CDR feature does not change the bearer capability functionality; the bearer capability information in the CDR record is read from the message Call Register where it is stored. If a particular bearer capability is not supported by the system, it is not displayed in the bearer capability field in the CDR.

**DASS/DPNSS Service Indicator Code** The Bearer Capability in CDR feature does not change the Service Indicator Code (SIC) functionality; the bearer capability information in the CDR record is read from the channel block where it is stored. If a particular SIC is not supported by the system, it is not displayed in the bearer capability field in the CDR.

**Feature packaging**

Bearer Capability in CDR requires the following packages:

- Call Detail Recording (CDR) package 4
- Call Detail Recording on Teletype Terminal (CTY) package 5
- New Call Detail Recording (FCDR) package 234

**Feature implementation**

**Task summary list** The following is a summary of the tasks in this section:

1. [Table 11 "LD 17 - Configure the CDR records for the system." \(page 24\)](#)
2. [Table 12 "LD 15 - Enable printing of the Bearer Capability information in the CDR record for the customer group." \(page 24\)](#)

**Table 11**  
**LD 17 - Configure the CDR records for the system.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	PARM	Change system parameters data.
...		
FCDR	NEW	Enable new format for CDR record.

**Table 12**  
**LD 15 - Enable printing of the Bearer Capability information in the CDR record for the customer group.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	CDR	Call Detail Recording

Table 12

**LD 15 - Enable printing of the Bearer Capability information in the CDR record for the customer group. (cont'd.)**

Prompt	Response	Description
CUST		Customer number
	0-99	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-31	Range for Small System
CDR	YES	Allow CDR records for the customer.
...		
PORT	0-15	Serial Data Interface port
CNI	a..a	Calling Number Identification
- BCAP	YES	Enable Bearer Capability in CDR.

## Call Types

For each Customer group and each trunk route data block, you can program CDR to record the following call types:

- all outgoing trunk calls, or
- all outgoing toll trunk calls and/or
- all incoming toll calls with flexible definition of toll.

If Flexible Definition of Toll does not specify digits, toll calls are those with the digits 0 or 1 as the first or second digit after the access code.

**Note:** Toll calls are flexibly defined based on the first or second digit dialed after the trunk route access code.

## Feature implementation

Table 13

**LD 16 - Configure CDR to record specific call types on trunk route.**

Prompt	Response	Description
REQ	CHG	Change existing data block
TYPE	RDB	Route Data Block
CUST	xx	Customer number as defined in LD 15.
ROUT		Route number
	0-511	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-127	Range for Small System
DES	x...x	Designator field for trunk (0-16 alphanumeric characters)

**Table 13****LD 16 - Configure CDR to record specific call types on trunk route. (cont'd.)**

Prompt	Response	Description
TKTP	a...a	Trunk Type
...		
CDR	(NO) YES	Call Detail Recording
- INC	(NO) YES	Incoming All Calls
- OAL	(NO) YES	Outgoing All
- - OTL	(NO) YES	Outgoing Toll

## Calling Line Identification in CDR

Calling Line Identification in CDR (CCDR) package 118 provides the calling party's number in call records. Calling Line Identification (CLID) is an ISDN feature.

Incoming Primary Rate Access (PRA) calls contain a CLID field in the call-setup message. When the CLID is provided by the far end, it is shown in the user's digit display. As an option, CLID is included in CDR records. When CLID is set to YES in LD 17, CLID is output in N (Normal) and S (Start) records for both terminating and tandem nodes in an ISDN network environment.

CLID is configured in the Configuration Record (LD 17). Refer to *ISDN Primary Rate Interface Features Fundamentals (NN43001-569)* () for more details.

CLID and In-Band Automatic Number Identification (IANI) are mutually exclusive, because they both use the same field to output their information.

## Feature implementation

**Table 14****LD 17 - Configure CLID in CDR on the system.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	PARM	System Parameters
...		
- CLID	(NO) YES	Calling Line ID in CDR

## Feature interaction

The AUXP prompt is introduced in LD 16 in Release 6.0. This option honors or ignores the Privacy indicator for a Calling Party Privacy call on a per incoming route basis. The AUXP settings are dependent on the PII settings. Following table shows the working for different settings of PII and AUXP.

Settings at Node A	Settings at Node B		
	PII-No, AUXP-No	AUXP-Yes, PII-No	PII-Yes, AUXP-Yes
PII-No, AUXP-No Call to Node A	Set B: No Impact Set A: No presentation Aux A: No presentation		
PII-No, AUXP-No Call to Node B	Set A: No Impact Set B: No presentation Aux B: No presentation	Set A: No Impact Set B: No presentation Aux B: Presented	Set A: No Impact Set B: Presented Aux B: Presented
AUXP-Yes, PII-No Call to Node A	Set B: No Impact Set A: No presentation Aux A: Presented		
AUXP-Yes, PII-No Call to Node B	Set A: No Impact Set B: No presentation Aux B: No presentation	Set A: No Impact Set B: No presentation Aux B: Presented	Set A: No Impact Set B: Presented Aux B: Presented
PII-Yes, AUXP-Yes Call to Node A	Set B: No Impact Set A: Presented Aux A: Presented		
PII-Yes, AUXP-Yes Call to Node B	Set A: No Impact Set B: Presented Aux B: Presented  Note: For all calls tandem through Node A to Node B, the setting on Node A to ignore the presentation indication has already converted the call to "unrestricted". Therefore with PII as YES at Node A, all calls will be treated as "unrestricted" at Node B.		

## Calling Party Number

The Calling Party Number (CPN) record is useful in matching phone Detail Records.

A P record is generated when a Calling Party Number (CPN) of 1 to 23 digits is entered for a CPN key assigned to Attendant Consoles and Business Communication Set (BCS) phones. A BCS is synonymous to a Meridian 1 proprietary phone. A P record is generated each time the user presses the CPN key. Therefore, multiple P records can be generated.

## Feature implementation

### Task summary list

The following is a summary of the tasks in this section:

1. [Table 15 "LD 10 / 11 - Configure a calling party number key on a Meridian 1 proprietary phone." \(page 28\)](#)
2. [Table 16 "LD 12 - Configure a calling party number key on an attendant console." \(page 28\)](#)

**Table 15**

**LD 10 / 11 - Configure a calling party number key on a Meridian 1 proprietary phone.**

Prompt	Response	Description
REQ	CHG	Change existing data block
TYPE	a...a	Type of data block
TN		Terminal Number
	l s c u	Format for Large System, Call Server 1000E, and Media Gateway 1000E, where l = loop, s = shelf, c = card, u = unit
	c u	Format for Small System, where c = card and u = unit
...		
KEY	xx CPN	Calling Party Number key, where xx = key number.

**Table 16**

**LD 12 - Configure a calling party number key on an attendant console.**

Prompt	Response	Description
REQ	CHG	Change existing data block
TYPE	a...a	Type of data block
TN		Terminal Number
	l s c u	Format for Large System, Call Server 1000E, and Media Gateway 1000E, where l = loop, s = shelf, c = card, u = unit
	c u	Format for Small System, where c = card and u = unit
...		
KEY	xx CPN	Calling Party Number key, where xx = key number.

## CDR Answer Supervision

The CDR Answer Supervision feature detects Answer Supervision which is sent as reverse battery from the Central Office. CDR Answer Supervision is available on the following trunk types:

- North American-based Ground Start trunks
- North American answer supervised Loop Start trunks with Answer Supervision

- International XFCOT Loop Start trunks
- DTI, DASS2, and EuroISDN trunks

CDR Answer Supervision record generation begins when Answer Supervision is received rather than when the trunk is seized. CDR begins when reverse battery is detected from the CO.

**Note 1:** Your response to the SUPN prompt in LD 14 determines whether answer and disconnect supervision is required. For ground start trunks, disconnect supervision is detected even if SUPN = NO.

**Note 2:** Trunks without Periodic Pulse Metering (PPM) and Answer Supervision capability continue to generate Call Detail Records based on when the trunk is seized.

**Note 3:** Your response to the OPA prompt in LD 16 determines if CDR or CDAS records are generated for PPM pulses. If OPA = NO, trunks with PPM capability and without Answer Supervision capability continue to generate Call Detail Records, based on when the trunk was seized. If OPA = YES, trunks with PPM capability and without Answer Supervision capability generate Call Detail Records based on the receipt of the first PPM pulse.

The "A" character in the TERID (Terminating ID) field indicates that Answer Supervision was received on an answer supervised trunk, and that CDR timing started with the receipt of the Answer Supervision signal. A "T" character in the TERID field indicates that Answer Supervision was not received on an answer supervised trunk, and that CDR timing started at trunk seizure. For Ground and Loop Start trunks, the A appears when Answer Supervision is detected from the CO. This option can be selected at the AIA prompt in LD 16.

### Class of Service

To enable Answer Supervision on North American or North American-based trunks, the Polarity Sensitive Pack (PSP) Class of Service must be set. PSP indicates that Answer Supervision is detected by battery reversal on the CO trunk.

If the Polarity Insensitive Pack (PIP) is configured, battery reversal is not detected, and Call Detail Recording begins at trunk seizure or when the first PPM pulse is received for PPM equipped trunks that have OPA = YES in LD 16.

For the international XFCOT to enable Answer Supervision, CLS must be set to Battery Supervised (BAT). BAT indicates that Answer Supervision is detected by battery reversal on the CO trunk. If CLS is not set to Battery Supervised (XBAT), battery reversal is not detected, and Call Detail Recording begins at trunk seizure or when the first PPM pulse is received for PPM equipped trunks that have OPA = YES in LD 16.

Refer to [Table 17 "Call Detail Record settings related to Answer Supervision"](#) (page 30) for the various Classes of Service, and their effects on Answer Supervision and Call Detail Records. This table applies to North American or North American-based ground and loop start trunks and international XFCOT trunks.

**Table 17**  
**Call Detail Record settings related to Answer Supervision**

OAL	OTL	OAN	PSP/BAT	CDR affected	CDR begins
NO	NO	*	YES/NO	No CDR	
YES	N/A	N/A	NO	All calls	Trunk seizure
NO	YES	N/A	NO	Toll calls	Trunk seizure
YES	N/A	NO	YES	All calls	Reverse battery for answered calls Trunk seizure for unanswered calls
NO	YES	NO	YES	Toll calls	Reverse battery for answered calls Trunk seizure for unanswered calls
YES	N/A	YES	YES	Answered calls	Reverse battery
NO	YES	YES	YES	Toll calls	Reverse battery
* : If OAL and OTL = NO, then OAN is always NO.					
<b>Legend:</b>					
PSP = Answer Supervision CLS for Ground Start and Loop Start trunks BAT = Battery Supervised XFCOT Loop Start trunks OAL = CDR for outgoing calls OTL = CDR for outgoing toll calls OAN = CDR for answered calls only N/A = Not applicable. The option setting has no effect on CDR.					

## Feature implementation

### Task summary list

The following is a summary of the tasks in this section:

1. [Table 18 "LD 16 - Configure trunk route for CDR with Answer Supervision."](#) (page 30)
2. [Table 19 "LD 14 - Configure each trunk for supervision-related Class of Service."](#) (page 31)

**Table 18**  
**LD 16 - Configure trunk route for CDR with Answer Supervision.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	RDB	Route Data Block

**Table 18****LD 16 - Configure trunk route for CDR with Answer Supervision. (cont'd.)**

Prompt	Response	Description
CUST	xx	Customer number as defined in LD 15.
ROUT		Route number
	0-511	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-127	Range for Small System
DES	x...x	Designator field for trunk (0-16 alphanumeric characters)
TKTP	a...a	Trunk Type
CDR	(NO) YES	Call Detail Recording
...		
- OAL	(NO) YES	CDR on outgoing calls
- - AIA	(NO) YES	Answered Call Identification Allowed

**Table 19****LD 14 - Configure each trunk for supervision-related Class of Service.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	a...a	Type of data block
...		
CLS		Class of Service
	(PIP)	Polarity Insensitive Pack
	PSP	Polarity Sensitive Pack
	BST	Battery Supervised
	(XBAT)	Battery Supervised COT denied
	BAT	Battery Supervised COT

## CDR 100 Hour Call

The Call Detail Recording 100 Hour Call feature allows CDR to accommodate calls with a duration greater than 99:59:59. To enable this feature, FCDR must be set to NEW in LD 17.

This feature produces a 100 Hour Duration field. This field is automatically displayed on the third line of all Fixed Format CDR record types that have the duration field.

The 100 Hour Call measurement reflects the one hundred, thousand, and ten thousand hours call duration. Accordingly, Call Detail Recording can record, up to a maximum of approximately eleven years and one hundred and fifty three days.

### Feature implementation

**Table 20**  
**LD 17 - Configure the system for New Format CDR.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	PARM	System parameters
....		
- FCDR	NEW	Configure New Format CDR.

### Call Detail Recording Enhancement

The CDR Enhancement (CDRX) feature enables customers to bill phone users for their participation in call segments. Affected calls include outgoing trunk calls transferred one or more times, and CO outgoing calls extended to another party by an attendant. CDR charges users connected to the call who originate and control each transfer. Billing is facilitated through a new CDR "X" record and through enhancements to the "S" (Start) and "E" (End) records.

The CDR Enhancement feature provides the following enhancements:

- Ensures local attendant-originated calls are allocated to the proper chargee.
- Generates CDR "X" records for stand-alone multiple call transfers on outgoing non-PPM CO trunks.
- Generates CDR "X" records for network multiple transfers on outgoing PPM and non-PPM CO trunks. Call Detail Recording Enhancement introduces the Billing Line Identification (BLID) CDR field to indicate the remote responsible party for the particular call duration specified in the Call Duration field in cases of network multiple call transfers.

### Operating parameters

No special hardware is required for CDRX in stand-alone and network non-Periodic Pulse Metering (PPM) CO trunk scenarios. On network PPM trunks, PPM trunk cards are required.

**Feature interactions****Conference/No-hold Conference**

CDR Enhancement only contains enhancements to call transfer records. The following table explains the interaction between Conference/No-hold Conference and the CDR Enhancement.

**Table 21**  
**CDR Enhancement - Conference interaction**

Scenario	Description
<p>A calls an outgoing CO trunk and conferences B.</p> <p><b>Note:</b> A, B and the CO trunk are on the same node.</p>	<p>An "S" record is generated against A at conference completion time. An "E" record is generated against the party that disconnects last (either A or B).</p>
<p>A calls an outgoing CO trunk; A transfers to B; B conferences C; C conferences D; B disconnects and C disconnects; D transfers to F.</p> <p><b>Note:</b> All phones and CO trunks are on the same node.</p>	<p>An "S" record is generated against A at transfer time. An "X" record is generated against B when B completes the conference with C. No record is generated when C conferences D. No record is generated when either B or C disconnect. An "X" record is generated against D when D completes the call transfer to F. An "E" record is generated against F when F disconnects. Stand-alone PPM maintains its existing operation.</p>
<p>A calls an outgoing CO trunk; A transfers to B; B conferences C; C conferences D; B disconnects and C disconnects. D transfers to F.</p> <p><b>Note:</b> Phone A and the CO trunk are in Node 1. Phones B, C, D, and F are in Node 2. Nodes 1 and 2 are connected by an ISDN TIE trunk.</p>	<p>An "S" record is generated against A at transfer time. No record is generated for B's conference to C or C's conference D. No record is generated when B disconnects. When C disconnects, an "X" record is generated against B. An "X" is generated against D when D completes the call transfer to F. An "E" record is generated against F when F disconnects.</p>
<p>Use the conference key for call transfer. A calls outgoing CO, A conferences to B, A disconnects, B conferences C, B disconnects, C conferences D, C disconnects and D transfers to F.</p> <p><b>Note:</b> All phones and CO trunk are in the same node.</p>	<p>An "S" record is generated against A at transfer completion time. All the succeeding transfers and conferences do not generate any CDR record. An "E" record is generated when F disconnects.</p>
<p>Use conference key for call transferring. A calls outgoing CO and transfers to B. B conferences C, B disconnects, C conferences D, C disconnects. D transfers to F.</p>	<p>An "S" record is generated against A when the transfer is complete. All succeeding transfers and conferences do not generate a CDR record. An "E" record is generated.</p>

**Table 21**  
**CDR Enhancement - Conference interaction (cont'd.)**

Scenario	Description
<b>Note:</b> Phone A and CO trunks are on node 1. Phone B, C, D and F are in node 2. Node 1 and node 2 are connected with an ISDN TIE trunk.	

### **Stand-alone PPM Call Transfer**

The CDR Enhancement feature ensures that CDR "S", "X", and "E" records do not operate as they do for stand-alone PPM. In an existing stand-alone PPM, an "S" or "X" record is generated when the originating party completes the call transfer and the third party answers.

In a non-PPM stand-alone environment, with the CDR enhancement, the "S" and "X" records are generated at transfer completion time. As soon as the originating party completes the call transfer, whether the third party answers or not, the CDR "S" or "X" record is printed. A CDR "E" record can be generated against an unanswered DN for its ringing time until the far-end trunk disconnects.

### **Override**

When one station overrides another established station on a CDR trunk call, a Start record is generated for the trunk against the overridden party and a conference is established (however, if there was a previous Start or "X" record, the override generates an "X" record). An "E" record is generated against the last party to disconnect, whether they are the overridden or overriding party. However, if the far-end disconnects first while the override is in progress, the "E" record is generated against the conference DN.

### **Barge-in**

When an attendant barges in on a CDR trunk connected to A, a CDR "S" record is generated against A and a conference is established. An "E" record is generated against A when A disconnects. However, if A disconnects before the attendant, an "E" is generated against the attendant when the attendant disconnects to show the barge-in duration and the attendant's duration on the call after A disconnects.

### **Call Forward**

**Call Forward All Calls** The following table explains the interaction between Call Forward All Calls and the CDR Enhancement feature.

**Table 22**  
**CDR Enhancement - Call Forward All Calls interaction**

Scenario	Description
<p>A calls an outgoing CO trunk, and transfers to B. B call forwards (all calls) to C, and C call forwards (all calls) to D.</p> <p><b>Note:</b> All phones and the CO trunk are on the same node.</p>	<p>An "S" record is generated against A when the transfer is complete, whether or not D answers. When D disconnects, an "E" record is generated against D.</p>
<p>A calls an outgoing CO trunk, and transfers to B. B call forwards (all calls) to C, and C call forwards (all calls) to D.</p> <p><b>Note:</b> A and the CO trunk are on Node 1. B, C, and D are on Node 2. Nodes 1 and 2 are connected by ISDN.</p>	<p>An "S" record is generated against A when the transfer is complete, whether D answers or not. When D disconnects, an "E" record is generated against D.</p>
<p>A calls an outgoing CO trunk, and transfers to B. B call forwards (all calls) to C, and C call forwards (all calls) to D. D transfers to E.</p> <p><b>Note:</b> A and the trunk are on Node 1. B, C, D, and E are on Node 2. Nodes 1 and 2 are connected by ISDN.</p>	<p>An "S" record is generated against A when the transfer is complete, whether or not D answers. When D transfers to E, an "X" record is generated against D. When E disconnects, an "E" record is generated against E.</p>

**Call Forward No Answer** [Table 23 "CDR Enhancement - Call Forward No Answer interaction" \(page 35\)](#) explains the interaction between Call Forward No Answer and the CDR Enhancement.

**Table 23**  
**CDR Enhancement - Call Forward No Answer interaction**

Scenario	Description
<p>A calls an outgoing CO trunk, and transfers to B. B call forwards (no answer) to C, and C call forwards (no answer) to D.</p> <p><b>Note:</b> All phones and the CO trunk are on the same node.</p>	<p>An "S" record is generated against A when the transfer is complete whether D answers or not. When D disconnects, an "E" record is generated against D.</p>
<p>A calls an outgoing CO trunk, and unguarded transfers to B. B call forwards (no answer) to C and C call forwards (no answer) to D.</p> <p><b>Note:</b> A and the CO trunk are on Node 1. B, C, and D are on Node 2. Nodes 1 and 2 are connected by ISDN.</p>	<p>An "S" record is generated against A when the transfer is complete, whether or not D answers. When D disconnects, an "E" record is generated against B.</p>

**Table 23**  
**CDR Enhancement - Call Forward No Answer interaction (cont'd.)**

Scenario	Description
<p>A calls an outgoing CO trunk, and unguarded transfers to B. B call forwards (no answer) to C, and C call forwards (no answer) to D. D transfers to E.</p> <p><b>Note:</b> A and the CO trunk are on Node 1. B, C, D, and E are on Node 2. Nodes 1 and 2 are connected by ISDN.</p>	<p>An "S" record is generated against A at transfer completion, whether or not D answers. When D transfers to E, an "X" record is generated against B. When E disconnects, an "E" record is generated against E.</p>
<p>A calls an outgoing CO trunk, and guarded transfers to B. B call forwards (no answer) to C, and C call forwards (no answer) to D. D answers and A completes the transfer. D disconnects.</p> <p><b>Note:</b> A and the CO trunk are on Node 1. B, C, and D are on Node 2. Nodes 1 and 2 are connected by ISDN.</p>	<p>An "S" record is generated against A when the transfer is complete. When D disconnects, an "E" record is generated against D.</p>

**Call Forward Busy** See Call Forward All Calls.

### Internal Call Detail Recording (ICDR)

CDR Enhancement generates a CDR "X" record when the call transfer is complete if an outgoing CO trunk participates in the call. There are no changes to the ICDR feature. The two features are independent.

### Call Waiting

In a call transfer on busy station A with Call Waiting Allowed, a CDR "S" or CDR "X" record is generated when the transferring station disconnects. An "E" record is generated when either A or the far-end/trunk disconnects. The CDR record includes the wait time.

### Initialize

If the system initializes, CDR information is lost.

### Attendant Recall

Table 24 "CDR Enhancement - Attendant Recall interactions" (page 37) explains the interaction between Attendant Recall and the CDR Enhancement feature.

**Table 24**  
**CDR Enhancement - Attendant Recall interactions**

Scenario	Description
<p>The attendant calls an outgoing CO trunk, and extends the call to A. A presses the Attendant Recall (ARC) key to recall the attendant and a three-party conference is established</p> <p><b>Note:</b> The trunk is not a CDRX trunk.</p>	<p>An "S" record is generated against the attendant when the attendant presses the Release key. An "E" record is generated at the end of the call against the party that disconnects last. Stand-alone PPM maintains existing operation.</p>
<p>The attendant makes an outgoing CO call, and extends the call to A. A presses the Attendant Recall (ARC) key to recall the attendant and a three-party conference is established.</p> <p><b>Note:</b> The trunk is a CDRX trunk.</p>	<p>An "S" record is generated against the attendant when the attendant presses the Release key. An "X" record is generated against A when the attendant presses the LOOP key to respond to the call. If A disconnects first, the attendant releases, and an "E" record is generated against the attendant. If the attendant releases first, an "X" record is generated against the attendant. An "E" record is generated against A when A disconnects.</p>
<p>The attendant makes an outgoing CO call, and extends the call to A. A presses the Attendant Recall (ARC) key twice to recall the attendant, which is also treated as a transfer complete.</p> <p><b>Note:</b> The CO trunk is a CDRX trunk.</p>	<p>An "S" record is generated against the attendant when the attendant presses the Release key. An "X" record is generated against A when A presses the ARC key twice to complete the transfer. An "E" record is generated against the attendant when the attendant releases.</p>

### Meridian Mail

**Stand-alone Non-PPM** During Call Transfer, if the outgoing CDRX trunk terminates at Meridian Mail due to call redirection, the CDR "E" record is generated against the Meridian Mail virtual agent DN when the far end disconnects.

If an outgoing CDRX trunk transfers to Meridian Mail, and the far-end caller uses "through dial" to call the attendant, an "X" record is generated against the Meridian Mail virtual agent DN. If the attendant extends the call to A, an "X" record is generated against the attendant. When A disconnects, an "E" record is generated against A.

**Network PPM and Non-PPM** During network call transfer, if the outgoing CDRX trunk is transferred through ISDN directly to Meridian Mail, the CDR record is generated against the Meridian Mail virtual agent DN.

During network call transfer, if the outgoing CDRX trunk is transferred through ISDN to a remote DN that is Call Forwarded (All Calls) to Meridian Mail, the CDR record is generated against the Meridian Mail virtual agent DN.

During network call transfer, if the outgoing CDRX trunk is unguarded transferred through ISDN to a remote DN that is Call Forward (No Answer) to Meridian Mail, the CDR record is generated against the remote DN instead of the Meridian Mail virtual agent DN.

During network call transfer, if the outgoing CDRX trunk is guarded transferred through ISDN to a remote DN which is Call Forwarded (No Answer) to Meridian Mail, the CDR record is generated against the Meridian Mail virtual agent DN.

### Hunting

See Call Forward All Calls.

### Call Park

[Table 25 "CDR Enhancement - Call Park interaction" \(page 38\)](#) explains the interaction between Call Park and the CDR Enhancement feature.

**Table 25**  
**CDR Enhancement - Call Park interaction**

Scenario	Description
A calls an outgoing CO trunk, and presses the Call Park key twice. Later, the CO recalls A. A disconnects.	An "S" record is generated against A when A presses the call park key twice. An "E" record is generated against A when either A or trunk disconnects.
A calls an outgoing CO, and transfers to B. B presses the Call Park key twice. The CO recalls B. B disconnects.	An "S" record is generated against A when the transfer is complete. When B presses the Call Park key twice, an "X" record is generated against B. The CO later recalls B. An "E" record is generated against B when either B or the trunk disconnects.
A calls an outgoing CO trunk, and presses the Call Park key twice. B dials Special Service Prefix (SPRE) + Parked Call Access code (72) + the identification number assigned to the parked call to access the parked call later. B transfers to C. C disconnects.	An "S" record is generated against A when A presses the Call Park key twice. An "X" record is generated against B when the transfer is complete, whether or not C answers. An "E" record is generated against C when either C or the CO trunk disconnects.

### Call Pickup

[Table 26 "CDR Enhancement - Call Pickup interaction" \(page 39\)](#) explains the interaction between Call Pickup and the CDR Enhancement feature.

**Table 26**  
**CDR Enhancement - Call Pickup interaction**

Scenario	Description
<p>A makes an outgoing CO call, and transfers to B. B unguarded transfers to C and C does not answer. D picks up the call by pressing the DN key and the RNP key.</p> <p><b>Note:</b> All phones are on the same node.</p>	<p>An "S" record is generated against A when the transfer is complete. An "X" record is generated against B when the transfer is complete. An "E" record is generated against C when D picks up the call. An "N" record is generated against D when either D or the far-end disconnects. If D does not disconnect, and instead transfers to E, an "S" record is generated against D when the transfer is complete. An "E" record is generated against E when E or the far end disconnects.</p>
<p>A makes an outgoing CO call, and transfers to B. B transfers to C and C does not answer. D picks up the call by pressing the DN key and the RNP key.</p> <p><b>Note:</b> A and the CO are on Node 1. B, C, and D are on Node 2. Nodes 1 and 2 are connected by ISDN.</p>	<p>An "S" record is generated against A when the transfer is complete. An "X" record is generated against B when the transfer is complete. An "E" record is generated against C when D disconnects.</p>
<p>A makes an outgoing CO call, and transfers to B. B guarded transfers to C and C does not answer. D picks up the call by pressing the DN key and the RNP key.</p> <p><b>Note:</b> All phones are on the same node.</p>	<p>An "S" record is generated against A when the transfer is complete. An "X" record is generated against B when the transfer is complete and D picks up the call. An "E" record is generated against D when D or the far end disconnects. If D does not disconnect, and instead transfers to E, an "X" record is generated against D when the transfer is complete. An "E" record is generated against E when E or the far end disconnects.</p>

### Automatic Call Distribution

For ACD Call Transfer, ACD Conference, and Network ACD, CDR records are generated as if these features are functioning in a non-ACD environment. For the Agent Observe sub-feature, CDR records are generated as they do in a non-ACD conference call.

### Disconnect Supervision

The Central Office can notify the system trunk card that the office has released when the trunk has disconnect supervision. The far end or near end can control trunk disconnect. The CDR records are generated when the trunk disconnects.

**Network Attendant Service**

When a remote attendant at Node 1 is involved in an outgoing CDRX trunk at Node 2 through the ISDN network, the CDR at Node 2 treats it as if it were a call transfer. [Table 27 "CDR Enhancement - Network Attendant Service interaction" \(page 40\)](#) explains the interaction between Network Attendant Service and the CDR Enhancement feature.

**Table 27**  
**CDR Enhancement - Network Attendant Service interaction**

Scenario	Description
The phone calls the attendant and the attendant extends out.	An "S" record is generated against the remote attendant DN (for example: 0000 or 0) and an "E" record is generated against the phone when the phone disconnects.
The attendant calls out and extends to a local phone.	An "S" record is generated against the remote attendant DN and another "E" record is generated against the phone when the phone disconnects.
The attendant calls the phone first and then extends out.	An "S" record is generated against the remote attendant DN and another "E" record is generated against the phone when the phone disconnects.

**Break-in**

[Table 28 "CDR Enhancement - Break-in interaction" \(page 40\)](#) explains the interaction between Break-in and the CDR Enhancement feature.

**Table 28**  
**CDR Enhancement - Break-in interaction**

Scenario	Description
A makes an outgoing CO call and then transfers to B. B is talking to the outgoing CO. C calls the attendant and the attendant Breaks-in to B. B disconnects.	An "S" record is generated against A when the transfer is complete. An "X" record is generated against B when the attendant Breaks-in. An "E" record is generated against the conference DN when B disconnects.

**Break-in to Enquiry Calls**

[Table 29 "CDR Enhancement - Break-in to Enquiry Calls interaction" \(page 41\)](#) explains the interaction between Break-in to Enquiry Calls and the CDR Enhancement feature.

**Table 29**  
**CDR Enhancement - Break-in to Enquiry Calls interaction**

Scenario	Description
A makes an outgoing CO call, and transfers to B. B transfers to C, and is talking to C without completing the transfer. D calls the attendant, and the attendant Breaks-in to B. B disconnects. C is connected to the outgoing CO.	An "S" record is generated against A when the transfer is complete. An "X" record is generated against B when B disconnects. An "E" record is generated against C when C disconnects.

### Attendant Metering Recall

This feature does not support Attendant Metering Recall.

### Virtual Network Service

If "Trunk on Hold for Reuse" is not configured, the COT trunk is released when the VNS call is released. If the COT trunk is a PPM trunk, the different phones involved in the call will be charged as for a regular non-VNS call. CDR "N", "S", "X", and "E" records will generate according to the call modifications. CDRX/PPM operation should be transparent to the VNS feature.

If "Trunk on Hold for Reuse" is configured, the COT trunk remains established after the VNS call is released and a CDR "S" record is produced with no charge information. If a new VNS call uses the same trunk, a CDR "X" record is printed, once again containing no charge information.

### Multiparty Operations

"Recovery of Misoperation on Call Transfer" interacts with the CDR Enhancement feature as shown in [Table 30 "CDR Enhancement - Multiparty Operations interaction" \(page 41\)](#).

**Table 30**  
**CDR Enhancement - Multiparty Operations interaction**

Scenario	Description
A calls outgoing CO and transfers to B. B transfers to C and C does not answer. After a predefined number of rings, the call is recalled to B. If B does not answer after a predefined number of rings the call is dropped.	An "S" record is generated against A when the transfer is complete. An "X" record is generated against B when the transfer is complete. An "E" record is generated against C when C does not answer after a predefined number of rings and the call is recalled to B. An "N" record is generated against B when the call is dropped.

### Busy Verification

[Table 31 "CDR Enhancement - Busy Verification interaction" \(page 42\)](#) explains the interaction between Busy Verification and the CDR Enhancement feature.

**Table 31**  
**CDR Enhancement - Busy Verification interaction**

Scenario	Description
A calls an outgoing CO trunk and transfers to B. B is talking to the outgoing CO. The attendant performs a Busy Verification on B.	An "S" record is generated against A when the transfer is complete. An "X" record is generated against B when the attendant presses the Busy Verify key and dials B's DN. An "E" record is generated against B if the attendant disconnects before B. An "E" record is generated against the conference DN if B disconnects before the attendant. An "E" record is generated against the conference DN if the far-end trunk disconnects first.

### Feature packaging

Call Detail Recording for stand-alone and network non-PPM environments requires the following software packages:

- Call Detail Recording Enhancement (CDRX) package 259, which requires the following packages:
  - Call Detail Recording (CDR) package 4
  - Call Detail Recording Teletype Terminal (CTY) package 5
  - New Format Call Detail Recording (FCDR) package 234

CDR for the attendant is included as part of Call Detail Recording (CDR) package 4 and is applicable to outgoing trunks.

Network PPM CDRX is included as part of Periodic Pulse Metering/Message Registration (MR) package 101.

### Feature implementation

#### Task summary list

The following is a summary of the tasks in this section:

1. [Table 32 "LD 17 - Change the Configuration Record for CDR Enhancement." \(page 42\)](#)
2. [Table 33 "LD 16 - Configure the Route Data Block to print CDR X records." \(page 43\)](#)
3. [Table 34 "LD 15 - Configure the Customer Data Block for CDR Enhancement." \(page 44\)](#)

**Table 32**  
**LD 17 - Change the Configuration Record for CDR Enhancement.**

Prompt	Response	Description
REQ	CHG	Change existing data

Table 32

**LD 17 - Change the Configuration Record for CDR Enhancement. (cont'd.)**

Prompt	Response	Description
TYPE	PARM	Change system parameters
...		
- FCDR	NEW	Format for Call Detail Recording
- MTRO	PPM	Periodic Pulse Metering

Table 33

**LD 16 - Configure the Route Data Block to print CDR X records.**

Prompt	Response	Description
REQ	CHG	Change existing data
TYPE	RDB	Route data block
CUST	xx	Customer number as defined in LD 15.
ROUT		Route number
	0-511	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-127	Range for Small System
...		
TKTP	COT	Central Office Trunk data block
	DID	Direct Inward Dialing trunk data block
	WAT	Wide Area Telephone Service trunk data block
	FEX	Foreign Exchange trunk data block
...	...	
CDR	YES	CDR provided
- INC	(NO) YES	CDR records generated for incoming calls
- OAL	YES	CDR records generated for outgoing calls
- - OTL	(NO) YES	CDR on Outgoing Toll calls
- - OPD	(NO) YES	Outpulsed digits recorded in CDR
- CDRX	(NO) YES	Print CDRX records on multiple call transfer for non-PPM (Digital Trunk) outgoing calls. This prompt appears if CDRX package 259 is equipped, and "MR" is not "PPM", "XLD" "ENDC", "DURC", or "IFC" is not equal to 1TR6. NI2 does not support Advice of Charge (AOC) so MR is not prompted.

**Table 34**  
**LD 15 - Configure the Customer Data Block for CDR Enhancement.**

Prompt	Response	Description
REQ:	CHG	Change existing data
TYPE:	CDR	CDR and Charge Account options
CUST		Customer number
	0-99	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-31	Range for Small System
...		
CDR	YES	Call Detail Recording

### **Feature operation**

No specific operating procedures are required to use this feature.

## **CDR Expansion**

The CDR Expansion (CDRE) package 151 has the following three basic functions:

- modifies ORIGID and TERID fields to accommodate a 7 digit DN
- adds Feature Group D ANI (FGD ANI) information to a second line
- adds a blank and an "&" to the second line

If the DNXP (DN Expansion) package is equipped without the CDRE package, CDR records are generated with the leading digits truncated, that is, the DN fields contain only the trailing 4 digits of the DN.

This feature does not apply to packet data.

## **CDR on Busy Tone**

The Call Detail Recording (CDR) on Busy Tone feature enhances the CDR record for abandoned calls.

With the CDR on Busy Tone feature, when the originator of an incoming or internal call disconnects after receiving a busy tone, a B record is produced. The CDR on Busy Tone information can be used for gathering statistics on customer response performance.

The CDR on Busy Tone B record information is displayed on the third line of the CDR B record for customers with the New CDR format (FCDR) configured. The third line is also used by the Time to Answer (TTA)

feature. A 'B' (for Busy Tone Condition) is printed in the Redirection Identifier subfield. The TTA subfields that usually show the total ringing time and the total waiting time are left blank.

Table 35 "Third line fields of CDR B record" (page 45) shows the fields of the third line of output of a CDR B record.

**Table 35**  
**Third line fields of CDR B record**

Line	Position	Field	Field Definition
3	2	&	additional line identifier
3	3-7	< >	5 blank spaces instead of TTA Total Ringing Time
3	8	B	Busy Tone identifier/Time To Answer (Redirection Identifier)
3	9-13	< >	5 blank spaces instead of TTA Total Waiting Time
3	14	< >	1 blank space at the end

### Incoming calls and the Route Data Block Last prompt

The following are examples of incoming call scenarios and record outputs.

#### Simple incoming call

The following describes a simple incoming call scenario:

1. Route 10 member 4 places an incoming call to DN 4001.
2. DN 4001 is busy.
3. The system produces a CDR B record.

The CDR B record produced in the case of a network call or a Central Office (CO) incoming call has the following format:

```
B 001 00 T010004 4001 00/00 00:08:23
& 00 000
& B
```

#### Incoming call - redirected internally

**Last redirection is by Call Forward All Calls** The following scenario describes an incoming call that is redirected internally. The Call Forward All Calls feature redirects the call to a busy DN.

1. Route 10 member 4 places an incoming call to DN 4000.
2. DN 4000 forwards the call to DN 4001.
3. DN 4001 redirects the call, using Call Forward All Calls, to DN 4002.

4. DN 4002 is busy. The originating party receives a busy tone.
5. The system produces a CDR B record.

If **LAST = YES** in LD 16, the printed Terminating ID is the DN of the busy phone, DN 4002. The output is the following:

```
B 001 00 T010004 4002 00/00 00:08:23
& 000 000
& B
```

If **LAST = NO** in LD 16, the printed Terminating ID is the DN of the dialed DN 4000. The output is the following:

```
B 001 00 T010004 4000 00/00 00:08:23
& 000 000
& B
```

**Last Redirection is by Hunting** The following scenario describes an incoming call that is redirected internally and the last redirection is by the Hunting feature:

1. Route 10 member 4 places call to DN 4000.
2. DN 4000 forwards the call to busy DN 4001.
3. DN 4001 is redirected, by Hunting, to DN 4002.
4. DN 4002 is busy. The originating party receives a busy tone.
5. The system produces a CDR B record.

If **LAST = YES** in LD 16, the printed Terminating ID is the DN of the first busy phone, DN 4001. The output is the following:

```
B 001 00 T010004 4001 00/00 00:08:23
& 000 000
& B
```

**Note:** If the last busy phone is a Basic Rate Interface (BRI) phone, the DN of this phone is printed as the terminating ID in the CDR B record.

If **LAST = NO** in LD 16, the printed Terminating ID is the dialed DN 4000. The output is the following:

```
B 001 00 T010004 4000 00/00 00:08:23
& 000 000
& B
```

**Last Redirection is by Group Hunt** The following scenario describes an incoming call that is redirected internally and the last redirection is by the Group Hunt feature:

1. Route 10 member 4 places an incoming call to DN 4000.
2. DN 4000 forwards the call, using Call Forward All Calls, to Pilot DN 8888 of a Group Hunt list.
3. All members of the Group Hunt list are busy, and no queuing is allowed. The originating party receives a busy tone.
4. The system produces a CDR B record.

If **LAST = YES** in LD 16, the printed Terminating ID is Pilot DN 8888 of the Group Hunt List. The output is the following:

```
B 001 00 T010004 8888 00/00 00:08:23
& 000 000
& B
```

If **LAST = NO** in LD 16, the printed Terminating ID is the Dialed DN 4000. The output is the following:

```
B 001 00 T010004 4000 00/00 00:08:23
& 000 000
& B
```

### Internal Calls

The record outputs for internal calls follow the same logic as that for incoming calls when LAST = YES in LD 16.

For internal calls, the Originating ID field on the first line of the CDR B record contains the DN of the phone that initiates the call. The contents of the Terminating ID field on the first line of the CDR B record depends on the type of the last redirection. The LAST prompt in LD 16 does not affect the Terminating ID for internal calls.

[Table 36 "Content of the Terminating ID field in the CDR B record on Busy Tone for Internal Calls and Incoming Calls when LAST = YES in LD 16" \(page 47\)](#) summarizes the content of the Terminating ID field in the CDR B record on Busy Tone for scenarios involving internal calls and incoming calls when LAST = YES in LD 16.

**Table 36**

**Content of the Terminating ID field in the CDR B record on Busy Tone for Internal Calls and Incoming Calls when LAST = YES in LD 16**

Type of Last Redirection	Terminating ID in B record output
Simple Call (Not redirected)	DN of the busy phone

**Table 36****Content of the Terminating ID field in the CDR B record on Busy Tone for Internal Calls and Incoming Calls when LAST = YES in LD 16 (cont'd.)**

Type of Last Redirection	Terminating ID in B record output
Call Forward All Calls	DN of the busy phone
Hunting	DN of the first busy phone. If terminating phone is a BRI phone, then DN of the BRI phone.
Group Hunt	Pilot DN

Table 37 "Content of the Terminating ID field in the CDR B record on Busy Tone for Incoming Calls when LAST = NO in LD 16" (page 48)NO in LD 16 summarizes the content of the Terminating ID field in the CDR B record on Busy Tone for scenarios involving incoming calls when LAST = NO in LD 16.

**Table 37****Content of the Terminating ID field in the CDR B record on Busy Tone for Incoming Calls when LAST = NO in LD 16**

Type of Last Redirection	Terminating ID in B record output
Simple Call (Not redirected)	DN of the busy phone
Call Forward All Calls	Originally dialed DN
Hunting	Originally dialed DN
Group Hunt	Originally dialed DN

### Operating parameters

In order for CDR on Busy Tone to be configured, the New CDR format (FCDR) package must be equipped and FCDR must be configured.

For a CDR B record on Busy Tone to be produced on internal calls, the Internal Call Detail Recording (ICDR) package must be equipped, and Internal CDR allowed must be configured in the Class of Service of at least one of the phones.

The CDR on Busy Tone feature is enabled/disabled on a route basis for incoming calls and on a phone Class of Service basis for internal calls. This is dependent upon general CDR and CDR Time To Answer (TTA) setup.

Incoming routes are configured in the Route Data Block by setting the CDRB prompt to YES.

For internal calls, Class of Service must be set to Abandoned Call Record and Time To Answer Allowed (ABDA) in LD 10, 11, or 27. In LD 12, ABAN must be set to ABDA.

For internal calls, the Terminating ID, printed in the B record, depends upon the type of the last redirection. The LAST concept does not apply.

For incoming calls, the Originating ID field on the first line of the CDR B record contains the Trunk route and member number on which the incoming call arrives. For internal calls, the Originating ID field contains the DN of the phone that initiates a call.

For incoming, redirected calls, the contents of the Terminating ID field depends upon the nature of the last redirection and the value of the LAST prompt in LD 16. When LAST = YES, the terminating DN (the busy DN) is printed. When LAST = NO, the dialed DN is printed.

The LAST prompt in the Route Data Block is attached to the incoming route. This prompt applies to local redirections that occur after a call arrives from that incoming route. Therefore, redirections that take place before arriving using the above route to the Busy Node are not taken into account.

B records are only output to CDR TTYs.

CDR on Busy Tone works on a stand-alone basis; therefore, redirections involving features, such as DPNSS Diversion and other network redirections do not apply to CDR.

CDR on Busy Tone produces a B record only if the busy condition is provided by a phone and not in the case of congestion. Also, the B record is only produced on the Busy Node.

For Time to Answer, CDR on Busy Tone does not apply to outgoing calls.

In the case of an internal call, if either the originating or the terminating phone is equipped with Abandoned Call Record and Time To Answer Allowed (ABDA), a B record is generated when the calling party receives a busy tone and abandons the call.

When Group Hunt is a call's last redirection, only the Abandoned Call Record and Time To Answer Allowed (ABDA) and Internal Call Detail Recording Allowed (ICDA) Classes of Service of the originating phone apply.

In LD 27, the maximum number of calls to be received at one time is set by the value of the MCAL prompt in the Digital Subscriber Loop (DSL) and in the Traffic Service Position (TSP). The value of MCAL in the DSL should not be greater than the one in the TSP. If this is the case, a warning is produced during service change in the DSL. However, if a wrong value is entered, no CDR B record is produced for that node.

**Feature interactions****Attendant Console**

When an incoming call arrives on a busy attendant and is put in a queue, the calling party does not receive a busy tone. However, in situations where a busy tone is provided to the calling party, a CDR B record is produced.

**Automatic Call Distribution**

When a CDR B record on Busy Tone is produced, the operation of the Automatic Call Distribution (ACD) feature is not affected. If a busy situation is encountered with ACD, the LAST concept does not apply, even in redirection situations. CDR on Busy Tone does not operate after ACD Night Treatment occurs.

**Basic Rate Interface Phones**

CDR on Busy Tone is supported on Basic Rate Interface (BRI) phones.

If the Hunting feature ends up on a busy BRI phone, a B record is produced. In this situation, for internal calls or incoming calls when LAST = YES, the Terminating ID in the B record is the DN of the BRI phone itself and not the DN of the first busy phone in the redirection chain. For incoming calls with LAST = NO, the TerID in the CDR B record is the dialed DN.

**Call Waiting**

If the terminating party is established on a call and it has a Call Waiting key configured, the originating party receives a ringback tone. Therefore, no CDR on Busy Tone record is produced.

**Call Detail Recording Time To Answer**

CDR on Busy Tone displays the busy tone state in the third line of the B record. The third line is displayed if Call Detail Recording Time to Answer (CDR TTA) is configured. CDR TTA also produces the B record for abandoned calls on ringing.

**Conference****No Hold Conference Transfer**

If a conferee attempts to extend a conference locally to a busy phone, a B record on busy tone is produced. If a remote site in a conference tries to extend the conference to a busy phone through an incoming trunk, a CDR B record on busy tone is produced, if CDRB = YES on the incoming route. The same occurs when attempting to transfer a call to a busy phone.

**Do Not Disturb**

When a calling party receives a busy tone from the Do Not Disturb feature, a B record is produced.

**Line Lockout**

When Line Lockout occurs, the system provides an overflow tone to the "locked out" telephone as the telephone enters the lockout state. Meridian 1 proprietary phones are then idle, and analog (500/2500 type) phones appear busy to any incoming call. In this situation, a busy tone is provided to the calling party, and a CDR B record is produced.

**Make Set Busy**

If a phone is in a busy state because the Make Set Busy key is activated, a CDR B record is produced.

**Multiple Directory Number/ Multiple Appearance Directory Number Redirection Prime**

**Single Call Arrangements (SCR)** When a call is answered, the DN key is lit on all phones that share that DN. If another call attempts to reach that DN, the calling party receives a busy tone, and a CDR B record is produced.

**Multiple Call Arrangements** If all appearances of a Multiple Appearance DN are busy, a busy tone is provided, and a CDR B record is produced.

In the case of a local call, a CDR B record is produced if one of the possible terminating phones or the originating phone is configured with the Abandoned call record and Time to Answer Allowed (ABDA) Class of Service and the Internal Call Detail Recording Allowed (ICDA) Class of Service. For an incoming call to a Multiple Appearance Directory Number (MADN), it is the configuration of the incoming route that is taken into account.

For a call involving an MADN, the Originating Auxiliary ID (OrigAuxID) and the Terminating Auxiliary ID (TerAuxID) on the second line of the B record indicate the Terminal Number (TN) of the MADN appearance involved in the call. If the MADN is the originator of the call, the OrigAuxID field contains the TN of the appearance that initiated the call. If the terminating party of the call is a busy MADN, the TN that is printed is the TN of the phone that was last configured.

**Message Intercept**

With this feature when the Ring Again feature encounters a busy DN, the calling party receives an announcement, stating that the Ring Again feature can be activated. In this case a busy tone is not provided, but a CDR B record is produced.

**Meridian 911**

Meridian 911 calls do not receive a busy tone. The only instance in which a busy tone is returned is when a test call is made which is only supported for 911T trunks. For maintenance purposes, a 911 test call can be made, and the system returns a permanent busy tone to the incoming 911 trunk. In this situation, a CDR B record is produced.

**Night Service**

If Night Service leads to a busy tone being returned to the originator, no CDR B record is produced.

**Radio Paging**

When a call is routed to a Radio Pager and encounters a busy tone, a B record is not produced.

**Feature packaging**

CDR on Busy Tone requires the following packages:

- New Format Call Detail Recording (FCDR) package 234, which has the following package dependencies:
  - Call Detail Recording (CDR) package 4
  - Call Detail Recording on Teletype Machine (CTY) package 5
  - Internal Call Detail Recording (ICDR) package 108

**Feature implementation****Task summary list**

The following is a summary of the tasks in this section:

1. [Table 38 "LD 17 - Configure New Format Call Detail Recording \(FCDR\) on the system." \(page 53\)](#)
2. [Table 39 "LD 15 - Configure Time to Answer for the customer group." \(page 53\)](#)
3. [Table 40 "LD 15 - Configure Call Detail Recording for the customer group." \(page 53\)](#)
4. [Table 41 "LD 16 - Configure CDR on Busy Tone on a trunk route basis." \(page 53\)](#)
5. [Table 42 "LDs 10, 11, or 27 - Define Abandoned call record on ringing or busy tone allowed and Internal Call Detail Recording Allowed Class of Service." \(page 54\)](#)
6. [Table 43 "LD 12 - Define Internal Call Detail Recording Allowed and Abandoned Call Record on ringing or busy tone for Attendant Consoles." \(page 55\)](#)

**Table 38****LD 17 - Configure New Format Call Detail Recording (FCDR) on the system.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	PARM	System Parameters.
...		
- FCDR	NEW	Use NEW CDR format.

**Table 39****LD 15 - Configure Time to Answer for the customer group.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	FTR	Features and options
CUST		Customer number
	0-99	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-31	Range for Small System
...		
OPT	(TTAD) TTAA	Time To Answer and Abandoned call records (Denied) Allowed.

**Table 40****LD 15 - Configure Call Detail Recording for the customer group.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	CDR	Call Detail Recording
CUST		Customer number
	0-99	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-31	Range for Small System
...		
CDR	YES	Call Detail Recording

**Table 41****LD 16 - Configure CDR on Busy Tone on a trunk route basis.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	RDB	Route Data Block
CUST	xx	Customer number as defined in LD 15.

**Table 41****LD 16 - Configure CDR on Busy Tone on a trunk route basis. (cont'd.)**

Prompt	Response	Description
ROUT		Route number
	0-511	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-127	Range for Small System
...		
CDR	(NO) YES	CDR output for the specified route (not) allowed.
- INC	(NO) YES	CDR records (not) generated on incoming calls.
- LAST		CDR record printing content option for redirected calls.
	(NO)	The Terminating ID field in the CDR record will contain the one before the last party.
	YES	The Terminating ID field in the CDR record will contain the last party.
- TTA	(NO) YES	Time To Answer output in CDR (not) provided.
- ABAN	(NO) YES	CDR on abandoned calls on ringing (not) allowed.
- CDRB	(NO) YES	(Deny)/Allow CDR on abandoned calls on busy tone. In order for the CDRB prompt to appear, TTA must be set to YES.

**Table 42****LDs 10, 11, or 27 - Define Abandoned call record on ringing or busy tone allowed and Internal Call Detail Recording Allowed Class of Service.**

Prompt	Response	Description
REQ	NEW	Add new data.
	CHG	Change existing data.
TYPE	a..a	Phone type.
TN		Terminal Number
	l s c u	Format for Large System, Call Server 1000E, and Media Gateway 1000E, where l = loop, s = shelf, c = card, u = unit
	c u	Format for Small System, where c = card and u = unit
...		
CLS	ABDA	Abandoned call record on ringing or busy tone allowed and Time To Answer allowed.
CLS	ICDA	Internal Call Detail Recording Allowed.

Table 43

**LD 12 - Define Internal Call Detail Recording Allowed and Abandoned Call Record on ringing or busy tone for Attendant Consoles.**

Prompt	Response	Description
REQ	NEW	Add new data.
	CHG	Change existing data.
TYPE	xxxx	Console type, where xxxx is: ATT, 1250, 2250.
...		
ICDR	ICDA	Internal Call Detail Recording Allowed.
ABAN	ABDA	Abandoned call record on ringing or busy tone allowed and Time To Answer allowed.

### Feature operation

No specific operating procedures are required to use this feature.

## Internal Call Detail Recording

Internal Call Detail Recording (ICDR) package 108 provides a call record type for internal calls. An internal call record is output for stations or attendants with the Internal Call Detail Allowed (ICDA) Class of Service.

### Feature implementation

#### Task summary list

The following is a summary of the tasks in this section:

1. [Table 44 "LD 10 - Configure analog \(500/2500 type\) phones with Internal CDR Class of Service." \(page 55\)](#)
2. [Table 45 "LD 11 - Configure Meridian 1 proprietary phone with Internal CDR Class of Service." \(page 56\)](#)
3. [Table 46 "LD 12 - Configure Attendant console with Internal CDR Class of Service." \(page 56\)](#)
4. [Table 47 "LD 27 - Configure Basic Rate Interface phone with Internal CDR Class of Service." \(page 56\)](#)

Table 44

**LD 10 - Configure analog (500/2500 type) phones with Internal CDR Class of Service.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	a...a	Phone type
...		
CLS		Class of Service
	(ICDD) ICDA	Internal Call Detail Recording (Denied) Allowed

**Table 45****LD 11 - Configure Meridian 1 proprietary phone with Internal CDR Class of Service.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	a...a	Phone type
...		
CLS		Class of Service
	(ICDD) ICDA	Internal Call Detail Recording (Denied) Allowed

**Table 46****LD 12 - Configure Attendant console with Internal CDR Class of Service.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	a...a	Attendant console type
TN		Terminal Number
	l s c u	Format for Large System, Call Server 1000E, and Media Gateway 1000E, where l = loop, s = shelf, c = card, u = unit
	c u	Format for Small System, where c = card and u = unit
...		
ICDR		Class of Service
	(ICDD) ICDA	Internal Call Detail Recording (Denied) Allowed

**Table 47****LD 27 - Configure Basic Rate Interface phone with Internal CDR Class of Service.**

Prompt	Response	Description
REQ	CHG	Request
TYPE	DSL	Digital Subscriber Loop
...		
CLS		Class of Service
	(ICDD) ICDA	Internal Call Detail Recording (Denied) Allowed

## CDR on Redirected Incoming Calls

The Call Detail Recording on Redirected Incoming Calls feature provides enhancements to the Call Detail Recording (CDR) operation on incoming calls.

Without this feature, when an incoming call is redirected, the Terminating ID field of the CDR record shows the party before the last party in the redirection chain. It does not show the answering party. With the Call

Detail Recording on Redirected Incoming Calls feature, the customer is provided with the option to retain that mode of operation (identify the party before last), or print the last party (the answering party) in the Terminating ID field. This functionality is provided for calls that have been redirected by:

- Call Forward All Calls
- Call Forward No Answer
- Call Forward Busy
- Hunt
- Intercept Computer (ICP) Call Forward

## Feature implementation

### Task summary list

The following is a summary of the tasks in this section:

1. [Table 48 "LD 15 - Configure the customer group for CDR." \(page 57\)](#)
2. [Table 49 "LD 16 - Configure the Terminating ID field LAST option in the trunk route." \(page 57\)](#)

**Table 48**

**LD 15 - Configure the customer group for CDR.**

Prompt	Response	Description
REQ	NEW	Add new data.
	CHG	Change existing data.
TYPE	CDR	Call Detail Recording
CDR	YES	CDR provided.

**Table 49**

**LD 16 - Configure the Terminating ID field LAST option in the trunk route.**

Prompt	Response	Description
REQ	NEW	Add new data.
	CHG	Change existing data.
TYPE	RDB	Route Data Block
CUST	xx	Customer number as defined in LD 15.
ROUT		Route number
	0-511	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-127	Range for Small System
DES	x...x	Designator field for trunk (0-16 alphanumeric characters)

Table 49

**LD 16 - Configure the Terminating ID field LAST option in the trunk route. (cont'd.)**

Prompt	Response	Description
TKTP	a...a	Trunk Type
...		
CDR	(NO) YES	CDR provided.
- INC	(NO) YES	CDR records generated on incoming calls.
- LAST	(NO) YES	CDR record printing content option for redirected calls. If LAST = YES, the Terminating ID field in the CDR record will contain the last party. If LAST = NO, the Terminating ID field in the CDR record will contain the one before the last party.

**CDR on TTY**

To output call records on one or more RS-232-C compatible devices, CDR on TTY (CTY) package 5 must be equipped. It provides a hard copy of the call records and can be used with the other CDR optional packages.

**Feature implementation**

Table 50

**LD 17 - Configure CDR on TTY.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	ALARM	Alarm Filters
...		
- USER	CTY	CDR Teletype

**CDR with Charge Account**

The CDR with Charge Account (CHG) feature provides the capability to directly bill calls to specific charge account numbers.

**Feature implementation****Task summary list**

The following is a summary of the tasks in this section:

1. [Table 51 "LD 11 - Configure a Charge Account key on a Meridian 1 proprietary phone." \(page 59\)](#)
2. [Table 52 "LD 12 - Configure a Charge Account key on an attendant console." \(page 59\)](#)

Table 51

LD 11 - Configure a Charge Account key on a Meridian 1 proprietary phone.

Prompt	Response	Description
REQ	CHG	Change existing data block
TYPE	a...a	Phone type.
TN		Terminal Number
	l s c u	Format for Large System, Call Server 1000E, and Media Gateway 1000E, where l = loop, s = shelf, c = card, u = unit
	c u	Format for Small System, where c = card and u = unit
...		
KEY	xx CHG	Charge account key

Table 52

LD 12 - Configure a Charge Account key on an attendant console.

Prompt	Response	Description
REQ	CHG	Change existing data block
TYPE	a...a	Type of attendant console.
TN		Terminal Number
	l s c u	Format for Large System, Call Server 1000E, and Media Gateway 1000E, where l = loop, s = shelf, c = card, u = unit
	c u	Format for Small System, where c = card and u = unit
...		
KEY	xx CHG	Charge account key

## CDR with Outpulsed Digits

When a CDR record is generated for an outgoing call on a route which has an outgoing call option for CDR specified, the dialed digits are placed in the call record. When the Outpulsed Digits (OPD) feature is enabled for the route, the DIGITS field contains the digits actually outpulsed by the system.

This feature only applies to Basic Alternate Route Selection (BARS) and Network Alternate Route Selection (NARS) calls. If both the BARS and NARS packages are equipped, the CDR record follows the BARS format by default. Coordinated Dialing Plan (CDP) and Route Selection-Automatic Number Identification (RS-ANI) are not supported by this feature.

The Outpulsed Digits (OPD) option is most useful when a Location Code call overflows onto the public network. With the OPD option selected, these calls are more easily matched with their toll charges, which are listed in the telephone company's bill.

The following examples show how CDR output is affected by the OPD feature. Each example shows the recorded digits for three CDR records:

**Example 1:** A Location Code call that stays within ESN

Digits dialed: 6 555 2315  
Digits Outpulsed: 2315  
Trunk Access Code: 487  
Equipped Package: BARS

- When OPD is not used, the Digits field = 4875552315
- When OPD = NO (disabled), the Digits field = 4875552315
- When OPD = YES (enabled), the Digits field = 4872315

**Example 2:** A Location Code call that is routed to the public network

Digits dialed: 6 555 2315  
Digits Outpulsed: 14089882315  
Trunk Access Code: 487  
Equipped Package: BARS

- When OPD is not used, the Digits field = 4875552315
- When OPD = NO (disabled), the Digits field = 4875552315
- When OPD = YES (enabled), the Digits field = 48714089882315

**Example 3:** A call onto the public network

Digits dialed: 6 408 555 2315  
Digits Outpulsed: 14085552315  
Trunk Access Code: 932  
Equipped Package: BARS

- When OPD not used, the Digits field = 9324085552315
- When OPD = NO (disabled), the Digits field = 9324085552315
- When OPD = YES (enabled), the Digits field = 93214085552315

**Example 4:** A Location Code call that stays within ESN

Digits dialed: 6 555 2315  
 Digits Outpulsed: 2315  
 Trunk Access Code: 457  
 Equipped Package: NARS (BARS not equipped)

- When OPD is not used, the Digits field = 65552315
- When OPD = NO (disabled), the Digits field = 65552315
- When OPD = YES (enabled), the Digits field = 65552315

**Note:** If the Location Code is outpulsed, it appears twice in the CDR Digits field.

**Example 5:** A Location Code call that is routed to the public network

Digits dialed: 6 555 2315  
 Digits Outpulsed: 14089882315  
 Trunk Access Code: 457  
 Equipped Package: NARS (BARS not equipped)

- When OPD is not used, Digits field = 65552315
- When OPD = NO (disabled), Digits field = 65552315
- When OPD = YES (enabled), Digits field = 645714089882315

**Example 6:** A call onto the public network

Digits dialed: 6 408 555 2315  
 Digits Outpulsed: 14085552315  
 Trunk Access Code: 932  
 Equipped Package: NARS (BARS not equipped)

- When OPD is not used, Digits field = 64085552315
- When OPD = NO (disabled), Digits field = 64085552315
- When OPD = YES (enabled), Digits field = 693214085552315

## Feature implementation

Table 53

LD 16 - Configure CDR with the Outpulsed Digits option on the trunk route.

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	RDB	Route Data Block
CUST	xx	Customer number as defined in LD 15.
ROUT		Route number

Table 53

LD 16 - Configure CDR with the Outpulsed Digits option on the trunk route. (cont'd.)

Prompt	Response	Description
	0-511	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-127	Range for Small System
DES	x...x	Designator field for trunk (0-16 alphanumeric characters)
TKTP	a...a	Trunk Type
...		
CDR	(NO) YES	Call Detail Recording
- OAL	(NO) YES	CDR on outgoing calls
- - OPD	(YES) NO	Outpulsed Digits

## Coordinated Dialing Plan with CDR Enhancement

The Coordinated Dialing Plan (CDP)/CDR Enhancement allows a customer to preserve CDP digits in the CDR output. The customer can select between having the Distant Steering Code (DSC) or Trunk Steering Code (TSC) replaced by the trunk route Access Code (ACOD), or having the trunk route ACOD inserted ahead of the DSC or TSC in the CDR output.

For a complete description of Coordinated Dialing Plan and Electronic Switched Network (ESN), refer to *Dialing Plans Reference (NN43001-283)* ().

## Feature implementation

Table 54

LD 15 - Configure the Coordinated Dialing Plan with CDR Enhancement.

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	CDR	Call Detail Recording
CUST		Customer number
	0-99	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-31	Range for Small System
...		
CDPR	(NO) YES	Coordinated Dialing Plan (CDP) CDR Enhancement

## Dialed Number Identification Service (DNIS)

The Dialed Number Identification Service (DNIS) number (after translation within the system) tells the answering party what number the caller dialed. This number may tell the user what the caller wants. The DNIS can be a maximum of 7 digits.

DNIS can be used with or without Supplementary Features (SUPP) package 131 and regardless of the FCDR setting in LD 17. With FCDR = OLD, the CDR record contains only four DNIS digits, either the first four, or the last four. Which four digits are recorded is determined by the response to the WDGT prompt in LD 16. If WDGT = F, the first four digits are recorded. If WDGT = L, the last four digits are recorded. If FCDR = NEW, the CDR record will contain seven DNIS digits.

The DNIS number is appended to the end of the existing CDR record when the trunk disconnects. The DNIS number is put into the following:

- S (Start) record in all cases
- N (Normal) record when the call is established
- E (End) record in all cases except cases where the incoming trunk disconnects first

DNIS is included in the call record after Feature Group D (FGD) digits only if:

- The DNIS and CDR packages are equipped.
- The route is a DNIS route.
- The DNIS option is turned ON.
- DCDR = YES in the Route Data Block (LD 16).

The In-Band Automatic Number Identification (IANI) feature also uses this field.

DNIS supports Network ACD (NACD) and Feature Group D (FGD). If a DNIS trunk call is rerouted to a remote target ACD agent through NACD and the incoming ISDN trunk's Route Data Block has DNIS-CDR enabled, the DNIS number appears at the end of Normal, Start, and End records. The DNIS number also appears at the end of CDR records for incoming FGD trunks that have the DNIS-CDR option enabled in their Route Data Block.

For details, refer to *Automatic Call Distribution Fundamentals* (NN43001-551) ().

**Feature packaging**

DNIS Length Flexibility is included in DNIS package 98. The DNIS package requires the following packages:

- Automatic Call Distribution A (ACDA) package 45
- Digit Display (DDSP) package 19
- Incoming DID Digit Conversion (IDC) package 113
- New CDR Format package 234

**Feature implementation**

In addition to enabling the New CDR Format package, the following parameters must be set. (Otherwise, the old CDR format is used, and only four DNIS digits are added to the CDR TTY record.)

**Table 55****LD 16 - Configure DNIS digits to output in CDR for a trunk route.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	RDB	Route Data Block
CUST	xx	Customer number as defined in LD 15.
ROUT		Route number
	0-511	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-127	Range for Small System
DES	x...x	Designator field for trunk (0-16 alphanumeric characters)
TKTP	a...a	Trunk Type
...		
AUTO	YES	Auto terminate
- DNIS	(NO) YES	DNIS route
- - NDGT	1-(4)-7	Number of DNIS Digits to record
- - WDGT	(L) F	Last 4 digits to record, first 4 digits to record
- - DCDR	(NO) YES	DNIS in CDR

**End-to-End Signaling (EES)**

The End-to-End Signaling (EES) digits are always output in the DIGITS field of the CDR record. EES digits are dialed after the end-of-dial (EOD) timer expires, after the octothorpe (#) has been pressed, or after Answer Supervision is received. EES digits often include sensitive information such as authorization codes and account numbers.

The system administrator has the option of suppressing or including the end-to-end digits in the DIGITD field. This is administered in LD 15 by entering the appropriate response to the ECDR prompt.

### Feature implementation

Table 56

LD 15 - Configure the CDR to suppress or include the EEs digits.

Prompt	Response	Description
REQ:	CHG	Change existing data.
TYPE:	CDR	Call Detail Recording
CUST		Customer number
	0-99	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-31	Range for Small System
...		
ECDR	(NO) YES	End-to-End Signaling digits included in DIGITS field of CDR.

### Enhanced Malicious Call Trace

Refer to *Features and Services (NN43001-506)* () for detailed information about the operation of the following features related to Malicious Call Trace:

- Malicious Call Trace
- Malicious Call Trace DN/TN Print
- Malicious Call Trace Idle
- Malicious Call Trace on Direct Inward Dialing

The Malicious Call Trace (MCT) feature generates a CDR record when the following conditions are met:

- The Trace (TRC) key is pressed during an established call on a Meridian 1 proprietary phone or Attendant Console, or a Flexible Feature Code is dialed from any phone (default is SPRE + 83).
- The Class of Service of the phone is MCTA.
- CDR is allowed for the Customer group.
- A TTY port is configured for MCT, or there is a maintenance TTY port.

The Malicious Call Trace feature is not supported on BRI phones. The call trace record can be printed on any Serial Data Interface (SDI) port when MCT is defined as a user. It is also written to the history file.

**Note:** If MCT is not defined, the record is printed on the maintenance TTY(s) only.

The record identifier is MCI for an internal call or MCE for an external call.

The following is an example of a record for an external call:

**Table 57**  
**Example 1**  
**Record for an external call**

```
MCE CUST01 RM31 10 *ATT05 S 14:24:05 10/03/1994 CNI# 98745678912
CLID#0119012345 *DN1234
```

[Table 58 "The first line of the MCT record" \(page 66\)](#) describes the first line of the MCT record. Note positions 12 and 27

**Table 58**  
**The first line of the MCT record**

Position	Name	Definition	Format
1-3	RECTYPE	Record Type:	
		Internal Call	MCI
		External Call	MCE
4	<blank>	Blank space	
5-10	CUSTNO	Customer Number	CUSTxx
11	<blank>	Blank space	(one blank space)
12	STAR1	* if originator activates MCT Blank if terminator activates MCT	* (one blank space)

**Table 58**  
**The first line of the MCT record (cont'd.)**

Position	Name	Definition	Format
13-25	ORIGID	Originating Identification:  Internal Party  Directory Number  ACD Position ID  Attendant Number  External route and member number  Conference Number	  TNXXXX  DNXXXX  ACD XXXXXXXX  ATTNXX  RMXXX XXX  CFLNN
26	<blank>	Blank space	(one blank space)
27	STAR2	* if terminator activates MCT Blank if originator activates MCT	* (one blank space)
28-40	TERID	Terminating Identification:  Internal Party  Directory Number  ACD Position ID  Attendant Number  External route and member number  Conference Number	  TNXXXX  DNXXXX  ACD XXXXXXXX  ATTNXX  RMXXX XXX  CFLNN
41	<blank>	Blank space	(one blank space)
42	ATT	Source is attendant console Destination is attendant console	S D
43	<blank>	Blank space	(one blank space)

**Table 58**  
**The first line of the MCT record (cont'd.)**

Position	Name	Definition	Format
44-62	TIMESTAMP	Timestamp	HH:MM:SS DD/MM/YYYY
63	<blank>	Blank space	(one blank space)
64-67	CNI	Calling Number Identification	CNI#
68	<blank>	Blank space	(one blank space)
69-84	CNINO	CNI Digits for MFC	XXXXXXXXXXXXXXXXXX

The second line of the MCT record shows the originating and terminating IDs as two DNs or as a combination of DN and CLID numbers.

### **Feature implementation**

#### **Task summary list**

The following is a summary of the tasks in this section:

1. Activate the MCTA Class of Service for the phones in LD 16 (analog 500/2500-type phones) and LD 11 (Meridian 1 proprietary phones).
2. Assign a TRC key in LD 11 or assign an FFC code in LD 57, if SPRE +83 is not acceptable.
3. Define MCT on a TTY port in LD 17 if you want a dedicated Malicious Call Trace TTY.

### **Feature Group D (FGD) Automatic Number Identification**

CDR records in which an incoming FGD trunk is involved can include an ANI digits field. However, CDRE package 151 must be equipped to have this option. The ANI field option is per route, defined in its FGD block (FGDB). The ANI field is only supplied in "N" and "S" record types, in both TTY and link formats. It includes two information digits (II) and either a 10 digit number (NPANXXXXXX) or a 3 digit number (NPA).

An indicator appears on the CDR record when the record has an ANI field. The ANI field printout is not dependent on the tenant or CLID fields being printed or if the FCDR prompt in LD 17 is set to OLD if FCDR is equipped.

For example, if no Tenant or CLID information is required, the CDR record consists of one line of ANI as well as tenant and CLID. If the tenant package is equipped and it is printing a record which has tenant number

fields, even if no tenant information is printed in the record, the second line is printed. If only II+NPA are received in the call, these are printed in their usual positions and the rest of the ANI field is filled with blank characters. If no ANI information is received for the call, the ANI field is blank.

### Feature implementation

#### Task summary list

The following is a summary of the tasks in this section:

1. LD 19 - Activate the FGDB.
2. LD 16 - Assign a Feature Group and Block Number (FGNO) to applicable trunk routes.

## Flexible CDR Digit Suppression

This option allows a customer to suppress a flexible number of dialed digits in the DIGITS field of CDR records. The Number of Digits Printed (NDP) prompt in LD 16 affects dialed digits, including EES digits, with one exception. When both ECDR = YES in LD 15 and OPD = YES in LD 16, NDP affects only the outpulsed digits; the EES digits are not affected. The specified number of digits (0 to 32) are truncated from the end of the dialed digit string on both TTY and magnetic tape outputs.

### Feature implementation

Table 59

LD 16 - Configure Flexible CDR Digit Suppression on the trunk route data block.

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	RDB	Route Data Block
CUST	xx	Customer number as defined in LD 15.
ROUT		Route number
	0-511	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-127	Range for Small System
DES	x...x	Designator field for trunk (0-16 alphanumeric characters)
TKTP	a...a	Trunk Type
...		
CDR	(NO) YES	Call Detail Recording
- NDP	INC 0-32	Output the first 0-32 digits
	EXC 0-32	Suppress the last 0-32 digits

## Format CDR

When equipped, the new Format CDR (FCDR) package 234 allows the user to select the Format of CDR records output on CDR Teletype (TTY) devices. When the "NEW" CDR format is selected, this feature outputs CDR items in fixed locations.

Prior to the introduction of the Format when the "new" CDR format is not selected, CDR items are output in various locations depending on which packages are equipped.

The CDR format is selected on a system-wide basis using input to the FCDR prompt in LD 17. [Table 60 "CDR TTY output format selection" \(page 70\)](#) highlights the requirements for the CDR formats

**Table 60**  
**CDR TTY output format selection**

Format CDR (Package 234)	FCDR prompt (LD 17)	CDR output format
Not equipped		OLD
Equipped	OLD	OLD
Equipped	NEW	NEW

The following are examples of the OLD and NEW CDR formats for the Internal CDR record:

**Table 61**  
**Example 2**  
**OLD CDR format for the Internal CDR L record**

---

```
L 001 00 2238 2238 003.0.00.07 003.0.00.06 02/01 15:17 00:00:02
```

---

**Table 62**  
**Example 2**  
**NEW CDR format for the Internal CDR L record**

---

```
L 001 00 2238 2238 02/01 15:17:00 00:00:02.0
& 003.0.00.07 003.0.00.06
&
```

---

**Note:** For the NEW CDR format, all fields are output. If the field is blank, it is output as spaces.

## Feature implementation

**Table 63**  
**LD 17 - Configure the NEW CDR format on the system.**

Prompt	Response	Description
REQ	CHG	Change existing data.

Table 63

LD 17 - Configure the NEW CDR format on the system. (cont'd.)

Prompt	Response	Description
TYPE	PARM	System Parameters
BCAP	a...a	Bearer Capability, where a...a = (SPEECH) or 3.1 KHz
-FCDR	(OLD) NEW	Format CDR.

## In-Band Automatic Number Identification

In-Band Automatic Number Identification (IANI) displays the ANI number when a call terminates on an ACD DN. IANI and ISDN cannot be configured on the same trunk group. The ANI display is shown in place of the CLID field on the second display line. For a complete description of the ANI feature, see *Features and Services (NN43001-506)* () .

IANI and Calling Line Identification (CLID) are mutually exclusive because they both use the same field to output information.

### Feature implementation

Table 64

LD 19 - Configure the In-Band ANI feature.

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	FGDB	Feature Group D
...		
CDAN	(NO) YES	CDR to include Automatic Number Identification.

## Japan Central Office Trunks

### Half Second duration accuracy

With this feature equipped, the user has the option of selecting half-second (0.5) duration accuracy instead of normal two-second duration accuracy.

Half-second accuracy is selected by responding YES to the DUR5 prompt in LD 17.

### Feature implementation

Table 65

LD 17 - Configure half-second accuracy for CDR records.

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	PARM	System Parameters

**Table 65****LD 17 - Configure half-second accuracy for CDR records. (cont'd.)**

Prompt	Response	Description
...		
- DUR5	(NO) YES	Half-second duration accuracy

## **M911 Enhancements: Call Abandon and MADN Display Coordination**

The M911 Enhancements feature enables the system to treat an abandoned call as though the calling party remains online. This feature consists of two elements: Call Abandon and Multiple Appearance Directory Number (MADN) Display Coordination.

With the Call Abandon feature activated, a 911 caller who aborts a call is not lost. Instead, the call forwards to an ACD queue. When the call is presented to an ACD agent, Automatic Number Identification (ANI) information appears on the agent's phone display and Automatic Location Identification (ALI) appears on the screen update. The call is then tagged in CDR Q and N records as an abandoned call.

The new MADN feature provides the following functionality. When a 911 call-taker on an MADN phone places an emergency 911 caller on hold, the current terminal screen remains on the display. When a 911 call-taker answers another call, either a new call or a retrieved-from-hold call, the terminal display is updated to include the current information for the call.

No B record is generated for an M911 abandoned call. B record generation is package dependent and applies only to an established call with Internal CDR.

Format CDR (FCDR) package 234 must be equipped and New CDR Format (NFCR) must be configured to receive call abandon information.

### **Feature implementation**

#### **Task summary list**

The following is a summary of the tasks in this section:

1. [Table 66 "LD 16 - Configure the trunk route for M911 Enhancements." \(page 73\)](#)
2. [Table 67 "LD 56 - Configure the Call Abandon on Answer tone." \(page 73\)](#)

Table 66

**LD 16 - Configure the trunk route for M911 Enhancements.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	RDB	Route data block
CUST	xx	Customer number as defined in LD 15.
...		
M911_ANI	(NO) YES	Receive ANI digits for Meridian 911 routes.
- M911_ABAN	(NO) YES	(Do not allow) Allow abandoned call treatment for route.
- M911_TONE	(YES) NO	(Supply) Do not supply call abandon tone for call taker when abandoned call is answered.

Table 67

**LD 56 - Configure the Call Abandon on Answer tone.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	FTC	Flexible Tones and Cadences
....		
CAB	(NO) YES	M911 Call abandon on Answer tone
TDSH	i bb cc tt	TDS external, burst, cadence, and tone
XTON	0-255	NT8D17 TDS Tone code
XCAD	0-255	NT8D17 cadence code for FCAD

## Time to Answer

The Time to Answer (TTA) feature outputs information which indicates the length of time taken to answer a call. The information output is:

- time the call was in the ringing state
- type of redirection, if redirection occurred
- the total waiting time

TTA is only output in the NEW CDR format.

TTA information is output on the third line in three subfields. The three subfields are:

- Time to Answer (total ringing time)
- Time to Answer (redirection indicator)
- Time to Answer (total waiting time)

Along with the preceding information, the Time to Answer feature also introduces a new B (Abandoned call) record. This record is output when a party, either in the ringing state or in queue, disconnects.

### Limitations

ACD queuing time, calls to ACD queues and calls on ACD DN's do not generate a Time To Answer field.

## Feature implementation

### Task summary list

The following is a summary of the tasks in this section:

1. [Table 68 "LD 17 - Configure NEW Format CDR on your system." \(page 74\)](#)
2. [Table 69 "LD 15 - Configure the Customer Group for Time to Answer CDR information." \(page 74\)](#)
3. [Table 70 "LD 16 - Configure the trunk route for Time to Answer CDR." \(page 75\)](#)
4. [Table 71 "LD 10 - Configure analog \(500/2500-type\) phones for the Abandoned Call Record Class of Service." \(page 75\)](#)
5. [Table 72 "LD 11 - Configure Meridian 1 proprietary phones for the Abandoned Call Record Class of Service." \(page 76\)](#)
6. [Table 73 "LD 12 - Configure attendant consoles for the Advanced Call Record Class of Service." \(page 76\)](#)
7. [Table 74 "LD 27 - Configure Basic Rate Interface phones for Abandoned Call Record Class of Service." \(page 76\)](#)

**Table 68**

**LD 17 - Configure NEW Format CDR on your system.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	PARM	System Parameters
...		
- FCDR	(OLD) NEW	New Format CDR

**Table 69**

**LD 15 - Configure the Customer Group for Time to Answer CDR information.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	ATT	Attendant consoles
CUST		Customer number

Table 69

LD 15 - Configure the Customer Group for Time to Answer CDR information. (cont'd.)

Prompt	Response	Description
	0-99	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-31	Range for Small System
OPT	(TTAD) TTAA	Time to Answer information and Abandoned call records (Denied) Allowed

Table 70

LD 16 - Configure the trunk route for Time to Answer CDR.

Prompt	Response	Description
REQ	CHG	Change existing data block.
TYPE	RDB	Route Data Block
CUST	xx	Customer number as defined in LD 15.
ROUT		Route number
	0-511	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-127	Range for Small System
DES	x...x	Designator field for trunk (0-16 character alphanumeric)
TKTP	a...a	Trunk Type
...		
CDR	(NO) YES	Call Detail Recording
- TTA	(NO) YES	Time to Answer output
- ABAN	(NO) YES	Abandoned call records output

Table 71

LD 10 - Configure analog (500/2500-type) phones for the Abandoned Call Record Class of Service.

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	a...a	Type of phone
...		
CLS		Class of Service
	(ABDD) ABDA	Abandoned call record and Time to Answer (Denied) Allowed

**Table 72****LD 11 - Configure Meridian 1 proprietary phones for the Abandoned Call Record Class of Service.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	a...a	Type of phone
...		
CLS		Class of Service
	(ABDD) ABDA	Abandoned call record and Time to Answer (Denied) Allowed

**Table 73****LD 12 - Configure attendant consoles for the Advanced Call Record Class of Service.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	a...a	Type of attendant console
TN		Terminal Number
	l s c u	Format for Large System, Call Server 1000E, and Media Gateway 1000E, where l = loop, s = shelf, c = card, u = unit
	c u	Format for Small System, where c = card and u = unit
...		
ICDR	(ICDD) ICDA	Internal Call Detail Recording (Denied) Allowed
- ABAN	(ABDD) ABDA	Abandoned call record and Time to Answer (Denied) Allowed

**Table 74****LD 27 - Configure Basic Rate Interface phones for Abandoned Call Record Class of Service.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	DSL	Digital Subscriber Loop
DSL	l s c dsl	Digital Subscriber Loop address
...		
CLS		Class of Service
	(ABDD) ABDA	Abandoned call record and Time to Answer (Denied) Allowed

## Meridian 1 Packet Handler (MPH)

CDR for the Meridian 1 Packet Handler (MPH) package 248 produces two record types. When either or both originating and terminating Terminal Service Profiles (TSPs, defined in LD 27) have CDR, the system generates an internal "G" record. A call that connects to the public data network, including calls between two different MPH applications on the same switch, generates an external "H" record.

External CDR configuration is based on the Customer Data Block (LD 15). Incoming and/or outgoing packet data calls may generate external CDR records.

### Implementation

#### Task summary list

The following is a summary of the tasks in this section:

1. [Table 75 "LD 15 - Configure Customer group CDR for packet data calls." \(page 77\)](#)
2. [Table 76 "LD 27 - Configure CDR in the DSL service profile for the BRI terminals." \(page 77\)](#)

**Table 75**

**LD 15 - Configure Customer group CDR for packet data calls.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	CDR	Call Detail Recording
CUST		Customer number
	0-99	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-31	Range for Small System
IMPH	(NO) YES	CDR for incoming packet data call
OMPH	(NO) YES	CDR for outgoing packet data call

**Table 76**

**LD 27 - Configure CDR in the DSL service profile for the BRI terminals.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	TSP	Terminal Service Profile
DSL	I s c dsl	Digital Subscriber Loop address
...		
CDR	(NO) YES	Internal CDR

## Message Registration

The Message Registration option is selected on a per-system basis by responding to the MTRO prompt in LD 17 under the PARM gate opener. At the MTRO prompt, either MR (Message Registration) or PPM (Periodic Pulse Metering) can be entered.

### Periodic Pulse Metering

With the Message Registration (MR) package 101 equipped and the Periodic Pulse Metering (PPM) feature enabled, the total pulse count and call charge fields are included in CDR records. With PPM enabled, Transfer (X) records are also output containing information about intermediate segments of outgoing calls that are internally transferred several times.

PPM is applicable to both analog and digital Central Office/Public Exchange trunks.

### Advice of Charge

Advice of Charge (AOC) information is delivered as part of the Primary Rate Access (PRA) signaling protocol between the system and ISDN Public Exchanges.

Two AOC sub-services are supported. The first sub-service is the AOC-ENDC (end of call). With this sub-service, charge information is only delivered at the end of the call when the connection is released between the system and the Public Exchange. With this sub-service, all intermediate X (Transfer) records output "OVF99" in the Meter Overflow field indicating that no charge information is available until the end of the call.

The second sub-service is the AOC-DURC (during call). With this sub-service, charge information is delivered as the call is modified and output in X records.

The system is capable of receiving AOC Information Elements from a number of ISDN Public Exchanges.

### Metered Transferred Call

[Table 77 "Example 4 Metered Transferred Call" \(page 79\)](#) is a sample output for a Call Transfer which involves a metered call.

**Table 77**  
**Example 4**  
**Metered Transferred Call**

```
S 008 00 DN7234 T004016 007.2.04.03 09/07 10:01 00:03:0 9660100
00029 000058

X 027 00 DN5345 T004016 09/07 10:10
00037 000074

X 044 00 DN5346 T004016 09/07 10:10
00003 000006

E 046 00 DN5333 T004016 09/07 10:14 00:09:55
00031 000062
```

**Note 1:** The second line in each record is charge and call information.

**Note 2:** Other unrelated call records can be inserted between these records.

From [Table 77 "Example 4 Metered Transferred Call" \(page 79\)](#), the Start and End times and duration for each segment of the call can be calculated as follows:

ORIGID	Start time	End Time	Duration
7234	10:01	10:04	3 minutes 8 seconds
5345	10:04	10:10	6 minutes
5346	10:10	10:10	Less than 1 minute
5333	10:10	10:14	4 minutes
<b>Total Call</b>	<b>10:01</b>	<b>10:14</b>	<b>13 minutes 4 seconds</b>

## Feature implementation

### Task summary list

The following is a summary of the tasks in this section:

1. [Table 78 "LD 17 - Configure Periodic Pulse Metering on the system." \(page 79\)](#)
2. [Table 79 "LD 15 - Configure Periodic Pulse Metering or Advice of Charge parameters for the customer." \(page 80\)](#)
3. [Table 80 "LD 16 - Configure Periodic Pulse Metering or Advice of Charge parameters on the trunk route." \(page 80\)](#)

**Table 78**  
**LD 17 - Configure Periodic Pulse Metering on the system.**

Prompt	Response	Description
REQ	CHG	Change existing data block.

**Table 78****LD 17 - Configure Periodic Pulse Metering on the system. (cont'd.)**

Prompt	Response	Description
TYPE	PARM	System Parameters
BCAP	a...a	Bearer Capability, where a...a = (SPEECH) or 3.1 KHz
...		
PARM	YES	Parameters
- MTRO		Metering Option.
	(MR)	Message Registration.
	PPM	Periodic Pulse Metering.

**Table 79****LD 15 - Configure Periodic Pulse Metering or Advice of Charge parameters for the customer.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	PPM	Periodic Pulse Metering
CUST		Customer number
	0-99	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-31	Range for Small System
HMTL	(YES) NO	Hotel/Motel environment
PCDL	(NO) YES	PPM and AOC output on CDR Data Link
UCST	0-9999	Unit Cost per PPM or AOC unit

**Table 80****LD 16 - Configure Periodic Pulse Metering or Advice of Charge parameters on the trunk route.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	RDB	Route Data Block
CUST	xx	Customer number as defined in LD 15.
ROUT		Route number
	0-511	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-127	Range for Small System
DES	x...x	Designator field for trunk (0-16 alphanumeric characters)
TKTP	a...a	Trunk Type
...		
OPA	(YES) NO	Outgoing PPM Answer

Table 80

**LD 16 - Configure Periodic Pulse Metering or Advice of Charge parameters on the trunk route.**  
(cont'd.)

Prompt	Response	Description
CCO	(NO) YES	Call Charge Output option
...		
MR		Message Registration
	(NO)	The route is not metered.
	STAC	The AOC information is decoded at the start of the call.
	DURC	The AOC information is decoded during and at the end of the call.
	ENDC	The AOC information is decoded at the end of the call.
	PPM	Buffered Periodic Pulse Metering signals to be counted on this route.
	RVB	Reverse battery signal from PSTN/CO interpreted as a supervisory signal and used as MR on this route.
	XLD	M&MM Lead non-buffered is used on this route.
RUCS	0-9999	Route Unit Cost per PPM pulse or AOC unit
RUCF	0-9999 0-3	Route Unit Conversion Factor

## Multi-Customer Operation

Multi-Customer Operation allows each customer within a single system to individually select the CDR feature and its options. The feature is enabled or disabled on a customer basis in the Customer Data Block (LD 15).

### Feature implementation

Table 81

**LD 15 - Configure CDR parameters for Customer Group.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	CDR	Call Detail Recording
CUST		Customer number
	0-99	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-31	Range for Small System
CDR	(NO) YES	Change CDR data for the Customer Group.
...	...	

## Multi-Frequency Compelled signaling

The Multi-Frequency Compelled (MFC) signaling feature provides a new Digits Type identifier: "C". The "C" is output in N (Normal), S (Start) and E (End) records to identify MFC Calling Number Identification (CNI) information.

Calling Number Information is output for incoming routes that have CDR activated for incoming calls and that are configured to receive MFC CNI.

### Feature implementation

**Table 82**

**LD 14 - Configure trunks for Calling Number Identification.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	a...a	Type of data
...		
CLS		Class of Service
	(CND) CNA	Calling Number Identification (Denied) Allowed

## Multi-Tenant Service

When your system is equipped with Multi-Tenant Service (TENS) package 86, the tenant numbers of the originating and terminating parties are included in CDR records.

### Feature implementation

#### Task summary list

The following is a summary of the tasks in this section:

1. [Table 83 "LD 93 - Activate Multi-Tenant Service." \(page 82\)](#)
2. [Table 84 "LD 10 - Activate the Multi-tenant service Class of Services for analog \(500/2500-type\) phones and assign a tenant number." \(page 83\)](#)
3. [Table 85 "LD 11 - Activate Multi-Tenant service Class of Services for Meridian 1 proprietary phones and assign a tenant number." \(page 83\)](#)

**Table 83**

**LD 93 - Activate Multi-Tenant Service.**

Prompt	Response	Description
REQ	NEW	Add new data.
...		
TYPE	TENS	Multi-Tenant Service

Table 83

LD 93 - Activate Multi-Tenant Service. (cont'd.)

Prompt	Response	Description
...		
CUST	xx	Customer number as defined in LD 15.

Table 84

LD 10 - Activate the Multi-tenant service Class of Services for analog (500/2500-type) phones and assign a tenant number.

Prompt	Response	Description
REQ	CHG	Change existing data
...		
TYPE	a...a	Type of phone
...		
TN		Terminal Number
	l s c u	Format for Large System, Call Server 1000E, and Media Gateway 1000E, where l = loop, s = shelf, c = card, u = unit
	c u	Format for Small System, where c = card and u = unit
...		
CLS	TENA	Tenant Service Allowed
...		
TEN	1-511	Tenant Number

Table 85

LD 11 - Activate Multi-Tenant service Class of Services for Meridian 1 proprietary phones and assign a tenant number.

Prompt	Response	Description
REQ	CHG	Change existing data.
...		
TYPE	a...a	Phone type
...		
TN		Terminal Number
	l s c u	Format for Large System, Call Server 1000E, and Media Gateway 1000E, where l = loop, s = shelf, c = card, u = unit
	c u	Format for Small System, where c = card and u = unit
...		
CLS	TENA	Tenant Service Allowed

Table 85

**LD 11 - Activate Multi-Tenant service Class of Services for Meridian 1 proprietary phones and assign a tenant number. (cont'd.)**

Prompt	Response	Description
...		
TEN	1-511	Tenant Number

## Multiple Appearance Directory Numbers

As a customer option, an Auxiliary Identification (AUXID) can supplement a Multiple Appearance Directory Number (MADN). An AUXID provides the loop, shelf, card, and unit of the originating phone. An AUXID field is provided only if the originating phone has an MADN as the prime DN. If a call originates from an MADN which is not the prime DN, the prime DN is shown as the originating ID with no AUXID field provided. AUXID output in CDR is configured on a customer basis in LD 15.

**Note:** The Multiple Appearance DN Redirection Prime (MARP) does not affect CDR feature.

## Feature implementation

Table 86

**LD 15 - Configure AUXID output in CDR for a customer group.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	CDR	Call Detail Recording
CUST		Customer number
	0-99	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-31	Range for Small System
CDR	(NO) YES	Change Call Detail recording Data.
...		
AXID	(NO) YES	(No) Auxiliary Identification output in CDR record.

## Network Metering CDR Enhancement

If the Enhanced Call Detail Recording (CDRX) package 259 is not equipped or the CDRX prompt in LD 16 is set to NO, network call transfers which involve metered trunks generate an S (Start) record for the first transfer and an (E) End record when the last party disconnects.

If a transfer string is "mixed", meaning some local transfers followed by a network transfer, S and X records are generated for the local transfers. However, the first network transfer generates an "X" record and no further transfers are recorded. The only further record is the E record.

When CDRX package 259 is equipped and CDRX = YES in LD 16, network call transfers involving metered trunks generate CDR S (Start), X (Transfer) and E (End) records for all local and network transfers.

The point in time at which the records are generated is determined by the transfer destination. If the call is being transferred within the same node, an X or E record is generated when the party the call is transferred to answers. If the call is being transferred to another node, an X or E record is generated when the transferring party completes the transfer. That is, the X or E record is generated when the transferring party presses the Transfer key a second time for Meridian 1 proprietary phones or goes on-hook following a consultation connection for analog (500/2500-type) phones.

The Network Metering CDR Enhancement requires the NEW CDR format to output the new BLID (Billing Line Identification) field. The BLID field is added to the third line of the S, X, and E records to indicate the remote billing party for a particular call segment.

In instances where a call accessed the network at one node and terminated at another node without terminating on the first node, only an N (Normal) record will be produced at the first node. The N record will include the BLID (Billing Line Identification) field.

## Feature implementation

**Table 87**

**LD 16 - Configure CDR on the route for the Network Metering CDR Enhancement.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	RDB	Route Data Block
CUST	xx	Customer number as defined in LD 15.
ROUT		Route number
	0-511	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-127	Range for Small System
DES	x...x	Designator field for trunk (0-16 character alphanumeric)
TKTP	a...a	Trunk Type
...		

Table 87

LD 16 - Configure CDR on the route for the Network Metering CDR Enhancement. (cont'd.)

Prompt	Response	Description
CDR	(NO) YES	Call Detail Recording
- CDRX	(NO) YES	CDR X records printed for multiple call transfers

## NPI and TON in CDR

The Numbering Plan Identification (NPI) and Type Of Number (TON) in Call Detail Recording (CDR) feature allows NPI and TON information to be optionally displayed on the third line of CDR records. NPI and TON are associated with Calling Line Identification (CLID) information, and are useful for billing incoming calls to the originating party.

The NPI and TON are only displayed for calls on an incoming ISDN trunk. Also, the New Format CDR (FCDR) prompt must be set to NEW and the Calling Line Identification (CLID) prompt must be set to YES in LD 17. Figure [Figure 1 "Third line format for CDR record"](#) (page 86) illustrates the format of the third line of a CDR ticket.

Figure 1

Third line format for CDR record

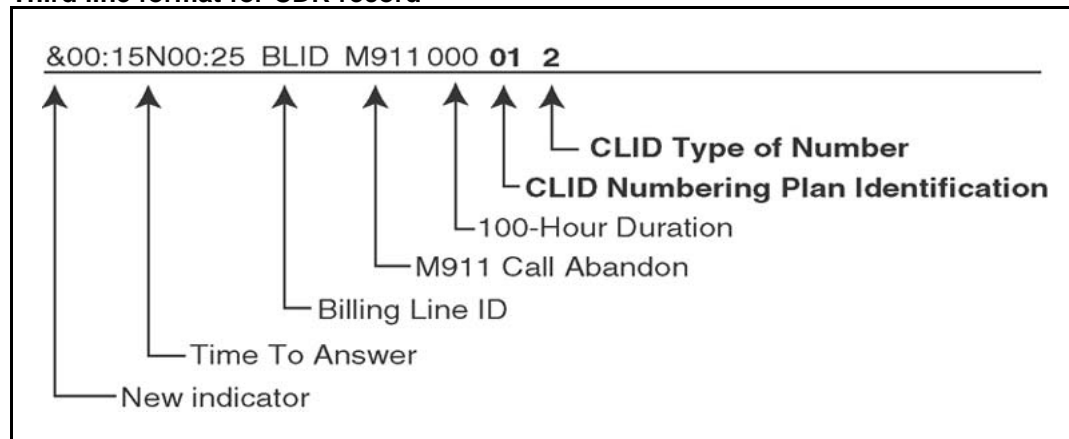


Table [Table 88 "Third line contents of the CDR record"](#) (page 86) describes the contents of the third line of the CDR record.

Table 88

Third line contents of the CDR record


Line	Position	Field	Field Definition
3	1	blank	
3	2	&	New line indicator
3	3-7	TTA	Time To Answer (Total ringing time)

**Table 88**  
**Third line contents of the CDR record (cont'd.)**

Line	Position	Field	Field Definition
3	8	REDIR/B	Time To Answer (Redirection Indicator)/Busy Tone Identifier
3	9-13	TWT	Time To Answer (Total Waiting Time)
3	14	blank	
3	15-30	BLID...xxx	Billing Line ID
3	31	blank	
3	32-38	ABANDON	M911 Call Abandon Tag
3	39	blank	
3	40-42	000	100-Hour Duration
3	43	blank	
3	44-45	NPI	CLID Numbering Plan Identification
3	46	blank	
3	47	TON	CLID Type Of Number
3	48	blank	

Figure 2 "Scenario involving a call over a Meridian Customer Defined Network" (page 88) illustrates a scenario in which DN 4000 (on Node 1) places a call to DN 4100 (on Node 2) over a Meridian Customer Defined Network (MCDN), using a Coordinated Dialing Plan (CDP) Distant Steering Code (DSC). The call arrives at Node 2 on Route 201 Member 4. A CDR N record is produced when the call is disconnected.

**Figure 2**  
**Scenario involving a call over a Meridian Customer Defined Network**

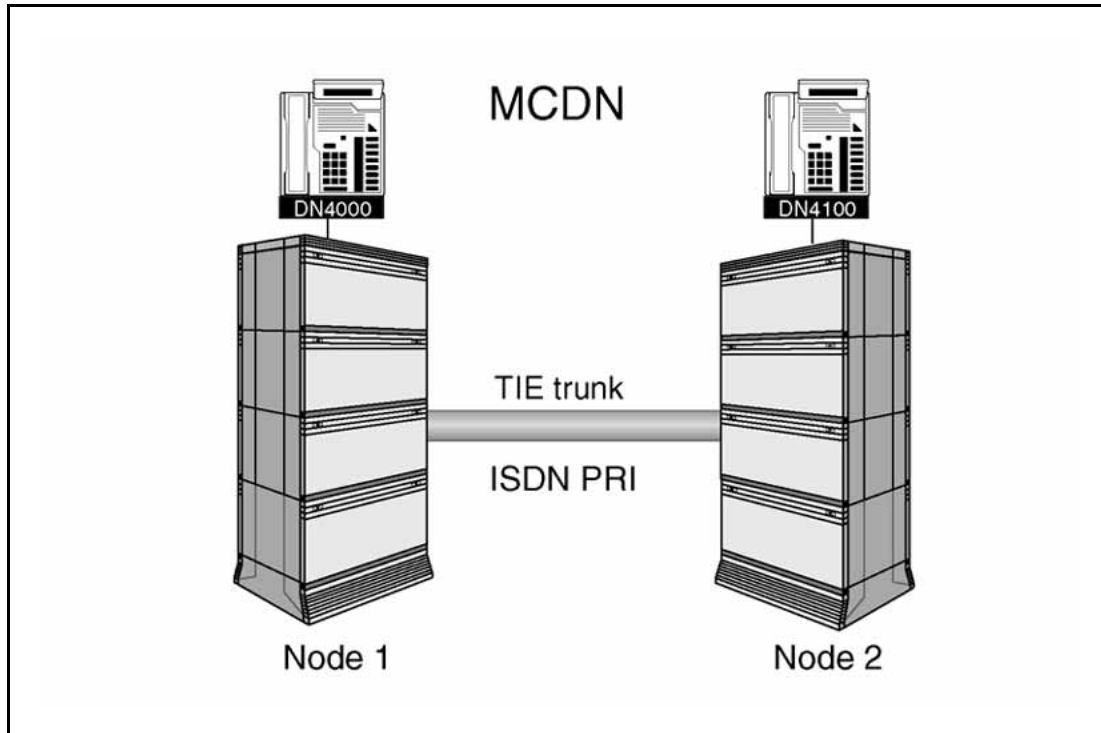

The CDR N record produced in [Figure 2 "Scenario involving a call over a Meridian Customer Defined Network" \(page 88\)](#) has the following format:

```
N 001 02 T201004 DN4100 02/10 18:07:15:00:02:24.0
& 4000XXXXXXXXXXXXX
&00:15N00:25 BLIDXXXXXXXXXXXXX 000 09 6
```

On line 3 of the ticket, the NPI value of "09" represents a private numbering plan. The TON value of "6" represents an Electronic Switched Network (ESN) Customer Dialing Plan (CDP). Refer to [Table 89 "NPI information printed in the CDR record for an MCDN incoming trunk" \(page 89\)](#) and [Table 90 "TON information printed in the CDR record for an MCDN incoming trunk" \(page 89\)](#) for the NPI and TON information for an MCDN incoming trunk.

When an incoming call arrives on the system, NPI and TON are sent in the calling party Information Element (IE) and are mapped into internal values. The correspondence between the system values and the values given in the specifications are described in [Table 89 "NPI information printed in the CDR record for an MCDN incoming trunk" \(page 89\)](#) to [Table 98 "TON information printed in the CDR record for an NI-2 incoming trunk" \(page 93\)](#).

Tables Table 89 "NPI information printed in the CDR record for an MCDN incoming trunk" (page 89) to Table 98 "TON information printed in the CDR record for an NI-2 incoming trunk" (page 93) show the information printed in the CDR record, depending on the incoming trunk protocol. As shown in these tables, not all combinations of NPI and TON exist.

In the TON tables, only ISDN/Telephony numbering plan (Rec. E.164/E.163) and private numbering plans are detailed. For all other supported NPI values, TON has the value of "unknown number".

Based on the scenario in Figure 2 "Scenario involving a call over a Meridian Customer Defined Network" (page 88), Tables Table 89 "NPI information printed in the CDR record for an MCDN incoming trunk" (page 89) and Table 56 "LD 15 - Configure the CDR to suppress or include the EEs digits." (page 65) on page Table 89 "NPI information printed in the CDR record for an MCDN incoming trunk" (page 89) show the NPI and TON information for an MCDN incoming trunk.

**Table 89**  
**NPI information printed in the CDR record for an MCDN incoming trunk**

NPI code in CDR	Corresponding value of NPI in specification
00	000 - unknown numbering plan
01	0001 - ISDN/Telephony numbering plan (Rec. E.164)
02	not used
03	not used
04	not used
08	not used
09	1001 - private numbering plan

**Table 90**  
**TON information printed in the CDR record for an MCDN incoming trunk**

TON code in CDR	Corresponding value of TON in specification	
	NPI = ISDN/Telephony numbering plan (Rec. E.164)	NPI = private numbering plan
0	0000 - unknown number	0000 - unknown number
1	0001 - international number	not used
2	0010 - national number	not used
3	not used	0011 - ESN SPN
4	0100 - local number	not used
5	not used	0101 - ESN LOC
6	not used	0110 - ESN CDP

Table 91 "NPI information printed in the CDR record for a EuroISDN incoming trunk" (page 90) and Table 92 "TON information printed in the CDR record for a EuroISDN incoming trunk" (page 90) show the NPI and TON information for a EuroISDN incoming trunk.

**Table 91**  
**NPI information printed in the CDR record for a EuroISDN incoming trunk**

NPI code in CDR	Corresponding value of NPI in specification
00	0000 - unknown
01	0001 - ISDN/Telephony numbering plan (Rec.E.164/E.163)
02	not used
03	0011 - data numbering plan (Rec.X.121)
04	0100 - telex numbering plan (Rec.F.69)
08	1000 - national standard numbering plan
09	1001 - private numbering plan

**Table 92**  
**TON information printed in the CDR record for a EuroISDN incoming trunk**

TON code in CDR	Corresponding value of TON in specification	
	NPI = ISDN/Telephony numbering plan (Rec. E.164)	NPI = private numbering plan
0	000 - unknown or 110 - abbreviated number	000 - unknown or 110 - abbreviated number or 001 - level 2 regional number
1	001 - international number	cannot be mapped
2	010 - national number	010 - level 1 regional number
3	011 - network specific number	011 - network specific number
4	100 - subscriber number	100 - subscriber number
5	not used	not used
6	cannot be mapped	cannot be mapped

Table 93 "NPI information printed in the CDR record for a QSIG incoming trunk" (page 91) and Table 94 "TON information printed in the CDR record for a QSIG incoming trunk" (page 91) show the NPI and TON information for a QSIG incoming trunk.

**Table 93****NPI information printed in the CDR record for a QSIG incoming trunk**

NPI code in CDR	Corresponding value of NPI in specification
00	0000 - unknown
01	0001 - ISDN/Telephony numbering plan (Rec.E.164/E.163)
02	not used
03	0011 - data numbering plan (Rec.X.121)
04	0100 - telex numbering plan (Rec. F.69)
08	1000 - national standard numbering plan
09	1001 - private numbering plan
<b>Note:</b> QSIG refers to ISO QSIG and ETSI QSIG.	

**Table 94****TON information printed in the CDR record for a QSIG incoming trunk**

TON code in CDR	Corresponding value of TON in specification	
	NPI = ISDN/Telephony numbering plan (Rec. E.164)	NPI = private numbering plan
0	000 - unknown or 110 - abbreviated number	000 - unknown or 110 - abbreviated number or 001 - level 2 regional number or 101 - level3 regional number
1	001 - international number	cannot be mapped
2	010 - national number	010 - level 1 regional number
3	011 - network specific number	011 - PTN specific number
4	100 - subscriber number	100 - local number
5	not used	cannot be mapped
6	cannot be mapped	cannot be mapped
<b>Note:</b> QSIG refers to ISO QSIG and ETSI QSIG.		

Table 95 "NPI information printed in the CDR record for a non-UIPE and non-MCDN incoming trunk" (page 92) and Table 96 "TON information printed in the CDR record for a non-UIPE and non-MCDN incoming trunk" (page 92) show the NPI and TON information for a non-UIPE and non-MCDN incoming trunk.

**Table 95****NPI information printed in the CDR record for a non-UIPE and non-MCDN incoming trunk**

NPI code in CDR	Corresponding value of NPI in specification
00	0000 - unknown numbering plan
01	0001 - Rec. E.164
02	0010 - Rec. E.163
03	0011 - Rec. X.121
04	0100 - Telex numbering plan
08	1000 - national numbering plan
09	1001 - private numbering plan
<b>Note:</b> Non-UIPE refers to the 1TR6, AXE-10 for Australia and Sweden, Swissnet 2, Numeris VN4, SYS-12, and D70 connectivities.	

**Table 96****TON information printed in the CDR record for a non-UIPE and non-MCDN incoming trunk**

TON code in CDR	Corresponding value of TON in specification	
	NPI = ISDN/Telephony numbering plan (Rec. E.164)	NPI = private numbering plan
0	0000 - unknown number <sup>1</sup>	0000 - unknown number <sup>1</sup>
1	0001 - international number <sup>2</sup>	not used
2	0010 - national number <sup>2</sup>	not used
3	not used	0011 - network specific number <sup>2</sup>
4	0100 - subscriber number <sup>2</sup>	not used
5	not used	not used
6	not used	0110 - abbreviated number <sup>2</sup>
<b>Note 1:</b> For SYS-12, AXE-10 for Australia and Sweden, Swissnet, Numeris VN4, and D70 interfaces, all received values are mapped into unknown code.		
<b>Note 2:</b> For all interfaces not mentioned in note1.		

Table 97 "NPI information printed in the CDR record for an NI-2 incoming trunk" (page 93) and Table 98 "TON information printed in the CDR record for an NI-2 incoming trunk" (page 93) show the NPI and TON information for an NI-2 incoming trunk.

**Table 97****NPI information printed in the CDR record for an NI-2 incoming trunk**

<b>NPI code in CDR</b>	<b>Corresponding value of NPI in specification</b>
00	0000 - unknown numbering plan
01	0001 - ISDN/Telephony numbering plan (Rec. E.164)
02	unused
03	unused
04	unused
08	unused
09	1001 - private numbering plan

**Table 98****TON information printed in the CDR record for an NI-2 incoming trunk**

<b>TON code in CDR</b>	<b>Corresponding value of TON in specification</b>	
	<b>NPI = ISDN/Telephony numbering plan (Rec. E.164)</b>	<b>NPI = private numbering plan</b>
0	not used	not used
1	001 - international number	not used
2	010 - national number	not used
3	not used	not used
4	100 - local number	100 - subscriber number
5	not used	not used
6	not used	not used

**Operating parameters**

The NPI and TON in CDR feature applies only for incoming ISDN trunk calls. NPI and TON information depends on the incoming trunk protocol.

The NPI and TON fields are left blank for internal calls, outgoing trunks, incoming non-ISDN trunks, or if the CLID prompt is set to NO.

When the FCDR prompt is set to OLD, the NPI and TON fields do not exist, regardless of how the CLID prompt is defined.

NPI and TON information is available with the following incoming interfaces: EuroISDN, QSIG (ISO and ETSI), MCDN, non-UIPE and non-MCDN, and NI2.

NPI and TON information is included in all types of CDR records that contain CLID information.

NPI and TON information is lost when system initialization occurs and the call is then reconstructed. In this case, if the call involves an incoming ISDN trunk and if the NPI and TON in CDR feature is configured, the NPI field contains two zeros (00) and the TON field contains one zero (0), regardless of the NPI and TON sent at call setup.

### Feature interactions

There are no feature interactions associated with this feature.

### Feature packaging

The NPI and TON in CDR feature requires the following packages:

- Call Detail Recording (CDR) package 4
- Call Detail Recording on Teletype Machine (CTY) package 5
- New Format Call Detail Recording (FCDR) package 234
- Calling Line Identification in Call Detail Recording (CCDR) package 118

### Feature implementation

Table 99

LD 17 - Configure the NPI and TON fields in CDR for the system.

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	PARM	System Parameters
...		
FCDR	NEW	New Format CDR
...		
CLID	YES	TON and NPI fields, in addition to CLID, are included.
...		

**Note 1:** For the NPI and TON in CDR feature, existing CDR implementation procedures must be performed.

**Note 2:** CLID must be configured for the NPI and TON in CDR feature. Refer to the Calling Line Identification and ISDN Calling Line Identification Enhancements feature modules in *ISDN Primary Rate Interface Features Fundamentals (NN43001-569)* ().

### Feature operation

No specific operating procedures are required to use this feature.

## Priority to CDR

When the Priority for CDR (PCDR) option is selected, idle call registers are used for CDR operations before they are used for call processing. The Priority to CDR feature helps to ensure that all calls are recorded by CDR. This feature does not apply to packet calls.

### Feature implementation

Table 100

LD 17 - Configure Priority to CDR on the system.

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	PARM	System Parameters
...		
- PCDR	(NO) YES	Priority for CDR

## Public Network Feature Invocation records

To support the NEAX-61 ISDN PRI Connectivity feature for New Zealand, a "Y" CDR record type is introduced. This record is only output in the NEW CDR format and indicates when a system user accesses a feature on the Central Office/Public Exchange to which they are connected using an ISDN link. The only feature capable of generating "Y" records is the "PSTN Three Party Conferencing" feature supported by the NEAX-61.

Whether "Y" records are generated is defined on a route basis.

### Feature implementation

Table 101

LD 16 - Configure Y record capability on the trunk route.

Prompt	Response	Description
REQ	CHG	Change existing data block
TYPE	RDB	Route Data Block
CUST	xx	Customer number as defined in LD 15.
ROUT		Route number
	0-511	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-127	Range for Small System
DES	x...x	Designator field for trunk (0-16 alphanumeric characters)
TKTP	a...a	Trunk Type
...		

**Table 101****LD 16 - Configure Y record capability on the trunk route. (cont'd.)**

Prompt	Response	Description
CDR	(NO) YES	Call Detail Recording
- CDRY	(NO) YES	Call Detail Recording Y (Public Network Feature Invocation) records

## Public Service Telephone Network (PSTN) Three Party Conferencing

For information on this feature, "PSTN Three Party Conferencing".

## R2MFC CNI/CDR Enhancements

The R2 Multifrequency Compelled Signaling (R2MFC) Calling Number Identification (CNI)/Call Detail Recording (CDR) Enhancements feature provides the following capabilities across an R2MFC/ISDN gateway:

- The mapping of the R2MFC CNI to the ISDN CLID, and vice versa
- The location of the captured CNI in the CDR is an option to a customer. The CNI can appear in the digits field, the CLID field in line two, or not appear at all in the CDR.
- The CNI is provided to the ACD MAX, Network ACD, and Radio Paging equipment, similar to how the CLID is provided.

### Examples of CDR formats

The following examples provide cases of the CNI (23008) appearing in the digits field, in the CLID field in line two, and not appearing at all in the CDR.

**Table 102****Example 5****CDR record with CNI in digits field**

N 003 00 T078001 T008001 31/05 1:40:05 05:30.5 C23008 & 0000 0000
--

**Table 103****Example 6****CDR record with CNI in CLID field**

N 003 00 T078001 T008001 31/05 13:40:05 0:05:30.5 71082317 &23008xxxxxxxxxxxx 0000 0000
--

**Table 104**  
**Example 7**  
**CDR record with no CNI appearance**

N 003 00 T078001 T008001 31/05 13:40:05 0:05:30.5 71082317 & 0000 0000
---

### **Operating parameters**

This feature is applicable to Large and Small systems.

The maximum length of the CLID field in the CDR is 16 digits.

This feature applies to all supported ISDN interfaces.

On the ISDN side of the R2MFC/ISDN gateway, the ISDN access may be through ISDN Primary Rate Interface (PRI), ISDN Signaling Link (ISL), Virtual Network Services (VNS) or Basic Rate Interface (BRI) trunks.

This feature does not affect the manner in which the CNI is composed at the originating switch of an R2MFC/ISDN gateway.

If the CNI cannot be composed at an R2MFC/ISDN gateway tandem switch, the CNI DN and the Trunk ID are sent in the CNI.

### **Feature interactions**

#### **Calling Party Privacy**

If the CLID is received with presentation denied, it is not mapped to the CNI. Instead, the CNI is composed of the CNI DN and the Trunk ID. Optionally, the CNI request can be ECNI (the CNI End-of-CNI R2MFC level 1 forward signal).

#### **Display Calling Party Denied**

If the CLID is received with Display Calling Party Denied, it is not mapped to the CNI. Instead, the CNI is composed of the CNI DN and the Trunk ID. Optionally, the CNI request can be ECNI (the CNI End-of-CNI R2MFC level 1 forward signal).

#### **EuroISDN Continuation**

The outgoing CLID element of the EuroISDN Continuation feature is mutually exclusive with the R2MFC CNI/CDR Enhancements feature. If the CLID is to be composed from the EuroISDN Continuation feature, it does not contain the CNI. If the CLID is to be composed from the CNI, no prefixes are added to the number.

#### **Feature Group D**

Feature Group D trunks do not support CNI. If a CNI is available, in addition to the CLID on a Feature Group D trunk, the CLID of the Feature Group D trunk is used for the CLID.

**In-Band Automatic Number Identification (IANI)**

Inband ANI trunks do not support CNI. If a CNI is available, in addition to the IANI on an IANI trunk, the IANI is used for the CLID.

**Incoming Trunk Programmable CLID**

Incoming Trunk Programmable CLID takes precedence over the R2MFC CNI/CDR Enhancements feature. If the outgoing ISDN trunk is allowed to send a billing number, the billing number is sent out as the CLID, not the CNI from the incoming trunk.

**M911**

M911 trunks do not support CNI. If a CNI is available on an M911 trunk, in addition to the ANI, the ANI is used for the CLID.

**R2MFC to DPNSS1 Gateway**

The R2MFC CNI/CDR Enhancements feature uses the CNI request enhancement (Upfront CNI) developed for the R2MFC to DPNSS1 Gateway feature.

**Feature packaging**

For the CNI/CLID tandem enhancement, the following software packages are required:

- Multifrequency Compelled Signaling (MFC) package 128
- Integrated Services Digital Network (ISDN) package 145
- 1.5 Mbps Primary Rate Access (PRA) package 146; **or** ISDN Signaling Link (ISL) package 147; **or** 2.0 Mbps Primary Rate Access (PRI2) package 154; **or** Virtual Network Services (VNS) package 183; **or** Basic Rate Interface Trunk Access (BRIT) package 233; which requires Basic Rate Interface (BRI) package 216
- For EuroISDN applications, EuroISDN (EUROISDN) package 261
- For QSIG applications, QSIG (QSIG) package 263

For the CDR enhancement, the following software packages are required:

- Call Detail Recording (CDR) package 4
- To print or store the CDR record, Call Detail Recording on Teletype Machine (CTY) package 5
- Calling Line Identification in Call Detail Recording (CCDR) package 118
- New Format Call Detail Recording (FCDR) package 234

## Feature implementation

### Task summary list

The following is a summary of the tasks in this section:

1. Table 105 "LD 17 - Configure the CDR system parameters." (page 99)
2. Table 106 "LD 15 - Configure the CDR field (if any) in which the CNI will appear for the customer group." (page 100)
3. Table 107 "LD 15 - Configure the CNI presentation option for the customer group." (page 100)
4. Table 108 "LD 16 - Configure the CDR option to provide CDR records for calls on the trunk route." (page 100)
5. Table 109 "LD 16 - Configure the CLID/CNI request options for an R2MFC trunk route (incoming)." (page 101)
6. Table 110 "LD 16 - Configure the CLID/CNI request options for an R2MFC trunk route (outgoing)." (page 103)
7. Table 111 "LD 16 - Configure the CLID/CNI request options for an R2MFC trunk route (incoming and outgoing)." (page 104)
8. Table 112 "LD 16 - Configure the CLID/CNI request options for an ISDN trunk route (incoming)." (page 107)
9. Table 113 "LD 16 - Configure the CLID/CNI request options for an ISDN trunk route (outgoing)." (page 108)
10. Table 114 "LD 16 - Configure the CLID/CNI request options for an ISDN trunk route (incoming and outgoing)." (page 111)
11. Table 115 "LD 16 - Configure the CLID/CNI request options for an R2MFC route (incoming and outgoing) with signaling that is supported by a D-channel (ISL)." (page 113)

**Table 105**

**LD 17 - Configure the CDR system parameters.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	PARM	System Parameters
...		
- FCDR	NEW	New format for Call Detail Recording
...		
- CLID	YES	Calling Line ID in the CDR
...		

**Table 106****LD 15 - Configure the CDR field (if any) in which the CNI will appear for the customer group.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	CDR	Call Detail Recording
CUST		Customer number
	0-99	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-31	Range for Small System
...		
- PORT	0-15	CDR port
- CNI		The CDR field (if any) in which the CNI will appear.
	(DGTS)	The CNI is recorded in the digits field (default).
	CLID	The CNI is recorded in the CLID field.
	NONE	The CNI is not captured in the CDR.

**Table 107****LD 15 - Configure the CNI presentation option for the customer group.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	NET	Networking data
CUST		Customer number
	0-99	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-31	Range for Small System
ISDN	YES	Integrated Services Digital Network (ISDN)
...		
- CNDN	0-99999999	Customer CNI DN on outgoing MFC calls (maximum length is eight digits.)
- CNIP	(YES) NO	Option to send CNI when CLID has presentation denied.
		YES = Send the CNI DN and the Trunk ID.
		NO = Do not send a CNI.

**Table 108****LD 16 - Configure the CDR option to provide CDR records for calls on the trunk route.**

Prompt	Response	Description
REQ	CHG	Change the existing data.

Table 108

**LD 16 - Configure the CDR option to provide CDR records for calls on the trunk route.**  
(cont'd.)

Prompt	Response	Description
TYPE	RDB	Route Data Block
CUST	xx	Customer number as defined in LD 15.
ROUT		Route number
	0-511	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-127	Range for Small System
TKTP		Trunk route type.
	DID	Direct Inward Dialing Trunk.
	TIE	TIE trunk.
...		
CDR	YES	Call Detail Recording.
- INC	YES	CDR on incoming calls.
...		
- OAL	YES	CDR on outgoing calls.

Table 109

**LD 16 - Configure the CLID/CNI request options for an R2MFC trunk route (incoming).**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	RDB	Route Data Block.
CUST	xx	Customer number as defined in LD 15.
ROUT		Route number
	0-511	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-127	Range for Small System
TKTP		Trunk route type.
	DID	Direct Inward Dialing Trunk.
	TIE	TIE trunk.
...		
ICOG	ICT	Incoming trunk route
...		
MFC	YES	MFC.
MFCI	1-127	MFC Incoming table number; must be a nonzero value.

**Table 109****LD 16 - Configure the CLID/CNI request options for an R2MFC trunk route (incoming). (cont'd.)**

Prompt	Response	Description
...		
ICIS		Incoming Identifier that is sent.  Prompted for incoming trunks (that is, if ICOG = ICT), and if the route type is R2MFC or ISDN.
	YES	YES = The default. Use the CLID/CNI from the incoming ISDN/R2MFC trunk.
ICNP		Incoming Numbering Plan.  Prompted if the route type is R2MFC and ICIS = YES.
	(UKWN)	Unknown.
	PRV	Private.
	PUB	Public.
ICNT		Incoming Numbering Type.  Prompted if the route type is R2MFC and ICIS = YES.
	(UKWN)	Unknown Number.
	INTL	International Number.
	NTN	National Number.
	LCL	Local Number.
	LOC	Location Number.
	CDP	Coordinated Dialing Plan.
	SPN	Special Number.
ICPS		Incoming Presentation Status.  Prompted if the route type is R2MFC and ICIS = YES.
	YES	YES = Indicate the presentation status of the CLID.
...		

Table 109

LD 16 - Configure the CLID/CNI request options for an R2MFC trunk route (incoming). (cont'd.)

Prompt	Response	Description
NCNI	(0)-7	<p>Request CNI after the defined number of digits are received.</p> <p>If NCNI = 0 (the default), the CNI request does not depend on the number of digits received.</p> <p>If the value for NCNI is defined to be greater than the accepted number of digits required for routing the call, CNI will not be requested but the call is routed.</p> <p>The NCNI prompt is requested if the trunk type is DID or TIE, the MFC signaling is R2MFC, and the MFC signaling table is defined on the route.</p>
CNIE	(NO) YES	<p>Request CNI after an ESN code is dialed.</p> <p>If the value of NCNI has been defined as greater than zero (in response to the NCNI prompt) and CNIE is set to YES, CNI is requested when either one of the conditions is met.</p> <p>The CNIE prompt is requested if the trunk type is DID or TIE, the MFC signaling is R2MFC, and the MFC signaling table is defined on the route.</p>

Table 110

LD 16 - Configure the CLID/CNI request options for an R2MFC trunk route (outgoing).

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	RDB	Route Data Block
CUST	xx	Customer number as defined in LD 15.
ROUT		Route number
	0-511	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-127	Range for Small System
TKTP		Trunk route type.
	DID	Direct Inward Dialing Trunk.
	TIE	TIE trunk.
...		
ICOG	OGT	Outgoing trunk route
...		

Table 110

LD 16 - Configure the CLID/CNI request options for an R2MFC trunk route (outgoing). (cont'd.)

Prompt	Response	Description
MFC	YES	MFC.
MFCO	1-127	MFC outgoing table number; must be a nonzero value.
...		
OGIS		Outgoing Identifier that is sent.  Prompted for outgoing trunks (that is, if ICOG = OGT), and if the route trunk type is R2MFC or ISDN.
	YES	YES = The default. Use the CLID/CNI from the incoming ISDN/R2MFC trunk, or from the calling phone.
...		
NCNI	(0)-7	Request CNI after the defined number of digits are received.  If NCNI = 0, the CNI request does not depend on the number of digits received.  If the value for NCNI is defined to be greater than the accepted number of digits required for routing the call, CNI is not requested but the call is routed.  The NCNI prompt is requested if the trunk type is DID or TIE, the MFC signaling is R2MFC and the MFC signaling table is defined on the route.
CNIE	(NO) YES	Request CNI after an ESN code is dialed.  If the value of NCNI has been defined as greater than zero (in response to the NCNI prompt) and CNIE is set to YES, CNI is requested when either one of the conditions is met.  The CNIE prompt is requested if the trunk type is DID or TIE, the MFC signaling is R2MFC and the MFC signaling table is defined on the route.
...		

Table 111

LD 16 - Configure the CLID/CNI request options for an R2MFC trunk route (incoming and outgoing).

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	RDB	Route Data Block.

Table 111

**LD 16 - Configure the CLID/CNI request options for an R2MFC trunk route (incoming and outgoing). (cont'd.)**

Prompt	Response	Description
CUST	xx	Customer number as defined in LD 15.
ROUT		Route number
	0-511	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-127	Range for Small System
TKTP		Trunk route type.
	DID	Direct Inward Dialing Trunk.
	TIE	TIE trunk.
...		
ICOG	IAO	Incoming and outgoing trunk route.
...		
MFC	YES	MFC.
MFCI	1-127	MFC Incoming table number; must be a nonzero value.
...		
MFCO	1-127	MFC outgoing table number; must be a nonzero value.
...		
ICIS		Incoming Identifier that is sent.  Prompted for incoming trunks (that is, if ICOG = ICT), and if the route type is R2MFC or ISDN.
	YES	YES = The default. Use the CLID/CNI from the incoming ISDN/R2MFC trunk.
ICNP		Incoming Numbering Plan.  Prompted if the route type is R2MFC and ICIS = YES.
	(UKWN)	Unknown.
	PRV	Private.
	PUB	Public.
ICNT		Incoming Numbering Type.  Prompted if the route type is R2MFC and ICIS = YES.
	(UKWN)	Unknown Number.
	INTL	International Number.
	NTN	National Number.

Table 111

**LD 16 - Configure the CLID/CNI request options for an R2MFC trunk route (incoming and outgoing). (cont'd.)**

Prompt	Response	Description
	LCL	Local Number.
	LOC	Location Number.
	CDP	Coordinated Dialing Plan.
	SPN	Special Number.
ICPS		Incoming Presentation Status.  Prompted if the route type is R2MFC and ICIS = YES.
	YES	YES = Indicate the presentation status of the CLID.
OGIS		Outgoing Identifier that is sent.  Prompted for outgoing trunks (that is, if ICOG = OGT), and if the route type is R2MFC or ISDN.
	YES	YES = The default. Use the CLID/CNI from the incoming ISDN/R2MFC trunk, or from the calling phone.
...		
NCNI	(0)-7	Request CNI after the defined number of digits are received.  If NCNI = 0 (the default), the CNI request does not depend on the number of digits received.  If the value for NCNI is defined to be greater than the accepted number of digits required for routing the call, CNI is not requested but the call is routed.  The NCNI prompt is requested if the trunk type is DID or TIE, the MFC signaling is R2MFC, and the MFC signaling table is defined on the route.
CNIE	(NO) YES	Request CNI after an ESN code is dialed.  If the value of NCNI has been defined as greater than zero (in response to the NCNI prompt) and CNIE is set to YES, CNI is requested when either one of the conditions is met.  The CNIE prompt is requested if the trunk type is DID or TIE, the MFC signaling is R2MFC, and the MFC signaling table is defined on the route.

Table 112

LD 16 - Configure the CLID/CNI request options for an ISDN trunk route (incoming).

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	RDB	Route Data Block
CUST	xx	Customer number as defined in LD 15.
ROUT		Route number
	0-511	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-127	Range for Small System
TKTP		Trunk route type
	DID	Direct Inward Dialing trunk
	TIE	TIE trunk
...		
ISDN	YES	ISDN
- MODE	PRA	ISDN Primary Rate Access mode of operation
...		
- IFC		Interface type.
	APAC	Asia Pacific.
	AXEA	Ericsson AXE-10 for Australia.
	AXES	Ericsson AXE-10 for Sweden.
	D70	Japan D70.
	D100	Meridian DMS-100.
	D250	Meridian DMS-250.
	ESIG	ETSI QSIG.
	ESS4	AT&T ESS#4.
	ESS5	AT&T ESS#5.
	EURO	EuroISDN.
	ISIG	ISO QSIG.
	NUME	Numeris for France.
	S100	Meridian SL-100.
	(SL1)	Meridian SL-1.
	SS12	SYS-12 for Norway.
	TCZ	NEAX-61 for New Zealand.
	1TR6	Germany 1TR6.

Table 112

LD 16 - Configure the CLID/CNI request options for an ISDN trunk route (incoming). (cont'd.)

Prompt	Response	Description
- - CNTY		Enter country pertaining to EuroISDN and Asia Pacific interface type (if IFC = EURO or APAC.)
	AUS	Austria
	AUST	Australia
	DEN	Denmark
	DUT	Holland
	EIR	Ireland
	(ETSI)	ETSI basic protocol
	FIN	Finland
	FRA	France
	GER	Germany
	HKNG	Hong Kong
	ITA	Italy
	NOR	Norway
	POR	Portugal
	SING	Singapore
	SWE	Sweden
	SWI	Switzerland
	TCNZ	New Zealand
	THAI	Thailand
...		
ICOG	ICT	Incoming trunk route.
...		
ICIS		Incoming Identifier that is sent.  Prompted for incoming trunks (that is, if ICOG = ICT), and if the route type is R2MFC or ISDN.
	YES	YES = The default. Use the CLID/CNI from the incoming ISDN/R2MFC trunk.
...		

Table 113

LD 16 - Configure the CLID/CNI request options for an ISDN trunk route (outgoing).

Prompt	Response	Description
REQ	CHG	Change existing data.

Table 113

LD 16 - Configure the CLID/CNI request options for an ISDN trunk route (outgoing). (cont'd.)

Prompt	Response	Description
TYPE	RDB	Route Data Block.
CUST	xx	Customer number as defined in LD 15.
ROUT		Route number
	0-511	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-127	Range for Small System
TKTP		Trunk route type
	DID	Direct Inward Dialing trunk
	TIE	TIE trunk
...		
ISDN	YES	ISDN.
- MODE	PRA	ISDN Primary Rate Access mode of operation.
...		
- IFC		Interface type.
	APAC	Asia Pacific.
	AXEA	Ericsson AXE-10 for Australia.
	AXES	Ericsson AXE-10 for Sweden.
	D70	Japan D70.
	D100	Meridian DMS-100.
	D250	Meridian DMS-250.
	ESIG	ETSI QSIG.
	ESS4	AT&T ESS#4.
	ESS5	AT&T ESS#5.
	EURO	EuroISDN.
	ISIG	ISO QSIG.
	NUME	Numeris for France.
	S100	Meridian SL-100.
	(SL1)	Meridian SL-1.
	SS12	SYS-12 for Norway.
	TCZ	NEAX-61 for New Zealand.
	1TR6	Germany 1TR6.

Table 113

LD 16 - Configure the CLID/CNI request options for an ISDN trunk route (outgoing). (cont'd.)

Prompt	Response	Description
- - CNTY		Enter country pertaining to EuroISDN and Asia Pacific interface type (if IFC = EURO or APAC.)
	AUS	Austria
	AUST	Australia
	DEN	Denmark
	DUT	Holland
	EIR	Ireland
	(ETSI)	ETSI basic protocol
	FIN	Finland
	FRA	France
	GER	Germany
	HKNG	Hong Kong
	ITA	Italy
	NOR	Norway
	POR	Portugal
	SING	Singapore
	SWE	Sweden
	SWI	Switzerland
	TCNZ	New Zealand
	THAI	Thailand
...		
ICOG	OGT	Outgoing trunk route.
...		
OGIS		Outgoing Identifier that is sent.  Prompted for outgoing trunks (that is, if ICOG = OGT), and if the route type is R2MFC or ISDN.
	YES	YES = The default. Use the CLID/CNI from the incoming ISDN/R2MFC trunk, or from the calling phone.
...		

Table 114

**LD 16 - Configure the CLID/CNI request options for an ISDN trunk route (incoming and outgoing).**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	RDB	Route Data Block
CUST	xx	Customer number as defined in LD 15.
ROUT		Route number
	0-511	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-127	Range for Small System
TKTP		Trunk route type
	DID	Direct Inward Dialing trunk
	TIE	TIE trunk
...		
ISDN	YES	ISDN.
- MODE	PRA	ISDN Primary Rate Access mode of operation.
...		
- IFC		Interface type.
	APAC	Asia Pacific.
	AXEA	Ericsson AXE-10 for Australia.
	AXES	Ericsson AXE-10 for Sweden.
	D70	Japan D70.
	D100	Meridian DMS-100.
	D250	Meridian DMS-250.
	ESIG	ETSI QSIG.
	ESS4	AT&T ESS#4.
	ESS5	AT&T ESS#5.
	EURO	EuroISDN.
	ISIG	ISO QSIG.
	NUME	Numeris for France.
	S100	Meridian SL-100.
	(SL1)	Meridian SL-1.
	SS12	SYS-12 for Norway.
	TCZ	NEAX-61 for New Zealand.
	1TR6	Germany 1TR6.

Table 114

**LD 16 - Configure the CLID/CNI request options for an ISDN trunk route (incoming and outgoing). (cont'd.)**

Prompt	Response	Description
- - CNTY		Enter country pertaining to EuroISDN and Asia Pacific interface type (if IFC = EURO or APAC.)
	AUS	Austria
	AUST	Australia
	DEN	Denmark
	DUT	Holland
	EIR	Ireland
	(ETSI)	ETSI basic protocol
	FIN	Finland
	FRA	France
	GER	Germany
	HKNG	Hong Kong
	ITA	Italy
	NOR	Norway
	POR	Portugal
	SING	Singapore
	SWE	Sweden
	SWI	Switzerland
	TCNZ	New Zealand
	THAI	Thailand
...		
ICOG	IAO	Incoming and outgoing trunk route.
...		
ICIS		Incoming Identifier that is sent.  Prompted for incoming trunks (that is, if ICOG = ICT), and if the route type is R2MFC or ISDN.
	YES	YES = The default. Use the CLID/CNI from the incoming ISDN/R2MFC trunk.
OGIS		Outgoing Identifier that is sent.  Prompted for outgoing trunks (that is, if ICOG = OGT), and if the route type is R2MFC or ISDN.

Table 114

**LD 16 - Configure the CLID/CNI request options for an ISDN trunk route (incoming and outgoing). (cont'd.)**

Prompt	Response	Description
	YES	YES = The default. Use the CLID/CNI from the incoming ISDN/R2MFC trunk, or from the calling phone.
...		

Table 115

**LD 16 - Configure the CLID/CNI request options for an R2MFC route (incoming and outgoing) with signaling that is supported by a D-channel (ISL).**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	RDB	Route Data Block
CUST	xx	Customer number as defined in LD 15.
ROUT		Route number
	0-511	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-127	Range for Small System
TKTP		Trunk route type
	DID	Direct Inward Dialing trunk
	TIE	TIE trunk
...		
ISDN	YES	ISDN
- MODE	ISLD	ISL mode of operation.
...		
- IFC		Interface type.
	APAC	Asia Pacific.
	AXEA	Ericsson AXE-10 for Australia.
	AXES	Ericsson AXE-10 for Sweden.
	D70	Japan D70.
	D100	Meridian DMS-100.
	D250	Meridian DMS-250.
	ESIG	ETSI QSIG.
	ESS4	AT&T ESS#4.
	ESS5	AT&T ESS#5.
	EURO	EuroISDN.

Table 115

**LD 16 - Configure the CLID/CNI request options for an R2MFC route (incoming and outgoing) with signaling that is supported by a D-channel (ISL). (cont'd.)**

Prompt	Response	Description
	ISIG	ISO QSIG.
	NUME	Numeris for France.
	S100	Meridian SL-100.
	(SL1)	Meridian SL-1.
	SS12	SYS-12 for Norway.
	TCZ	NEAX-61 for New Zealand.
	1TR6	Germany 1TR6.
- - CNTY		Enter country pertaining to EuroISDN and Asia Pacific interface type (if IFC = EURO or APAC.)
	AUS	Austria
	AUST	Australia
	DEN	Denmark
	DUT	Holland
	EIR	Ireland
	(ETSI)	ETSI basic protocol
	FIN	Finland
	FRA	France
	GER	Germany
	HKNG	Hong Kong
	ITA	Italy
	NOR	Norway
	POR	Portugal
	SING	Singapore
	SWE	Sweden
	SWI	Switzerland
	TCNZ	New Zealand
	THAI	Thailand
...		
ICOG	IAO	Incoming and outgoing trunk route.
...		
MFC	YES	MFC
MFCI	1-127	MFC Incoming table number; must be a nonzero value.

Table 115

**LD 16 - Configure the CLID/CNI request options for an R2MFC route (incoming and outgoing) with signaling that is supported by a D-channel (ISL). (cont'd.)**

Prompt	Response	Description
...		
MFCO	1-127	MFC outgoing table number; must be a nonzero value.
...		
ICIS		Incoming Identifier that is sent.  Prompted for incoming trunks (that is, if ICOG = ICT), and if the route type is R2MFC or ISDN.
	YES	YES = The default. Use the CLID/CNI from the incoming ISDN/R2MFC trunk.
ICNP		Incoming Numbering Plan.  Prompted if the route type is R2MFC and ICIS = YES.
	(UKWN)	Unknown
	PRV	Private
	PUB	Public
ICNT		Incoming Numbering Type.  Prompted if the route type is R2MFC and ICIS = YES.
	(UKWN)	Unknown Number
	INTL	International Number
	NTN	National Number
	LCL	Local Number
	LOC	Location Number
	CDP	Coordinated Dialing Plan
	SPN	Special Number
ICPS		Incoming Presentation Status.  Prompted if the route type is R2MFC and ICIS = YES.
	YES	YES = Indicate the presentation status of the CLID.
OGIS		Outgoing Identifier that is sent.  Prompted for outgoing trunks (that is, if ICOG = OGT), and if the route type is R2MFC or ISDN.
	YES	YES = The default. Use the CLID/CNI from the incoming ISDN/R2MFC trunk, or from the calling phone.

**Feature operation**

No specific operating procedures are required to use this feature.

**Scheduled Access Restriction**

This feature generates A (Authorization Code/Scheduled Access Restriction) call records whenever a Scheduled Access Restriction (SAR) Flexible Feature Code (FFC) is dialed and the SCDR prompt in LD 88 is set to YES.

**Feature implementation****Table 116****LD 88 - Configure the Scheduled Access Restriction in CDR.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	SAR	Scheduled Access Restriction
CUST	xx	Customer number as defined in LD 15.
...		
SCDR	(NO) YES	Scheduled Access Restriction: Flexible Feature Codes in CDR

**Stand-alone and network outgoing non-metered CDR Transfer Enhancement (CDRX)**

When the stand-alone and network outgoing non-metered CDR Transfer Enhancement (CDRX) package 259 is not equipped, multiple call transfers for outgoing non-metered calls in stand-alone and network environments generate an S (Start) record for the first transfer and an E (End) record when the last party disconnects.

When the CDRX package is equipped, a call transfer of an outgoing non-metered CO trunk in a stand-alone environment generates an S (Start) record when the originating party of the outgoing trunk call releases from the transfer, regardless of whether the transferred-to party has answered or not. This means that the ringing time is charged to the transferred-to party, which is different from the metered stand-alone operation.

If the party to which the call is transferred originates another call transfer, an X (Transfer) record is generated when the transfer is complete. This permits the entire second segment of the call to be charged to the new controlling DN. This rule applies to all succeeding call transfers until the last party disconnects. After final disconnection, an End record is generated.

During multiple call transfers, the Originating field of the S (Start), X (Transfer), and E (End) records is always the DN of the transferring or disconnecting party, and the Terminating field is always the outgoing CO trunk. The duration in each record shows the time segment from when the previous controller disconnects until the new controller disconnects. This capability is controlled through the CDRX prompt in LD 16.

Network non-metered CDR Transfer Enhancement is based on the existing Network Call Redirection feature. For network multiple call transfers involving non-metered outgoing CO trunks, CDR generates S (Start), (X) Transfer, and (E) End records similar to the stand-alone outgoing non-metered CO trunk. The Stand-alone and network outgoing non-metered CDR Transfer Enhancement requires the NEW CDR format to output the BLID (Billing Line I.D.) field.

A BLID is added to the third line of the N, S, X, and E records to indicate the remote billing party for a particular call segment.

### Feature implementation

**Table 117**  
**LD 16 - Configure the Trunk route CDR for the CDR transfer Enhancement.**

Prompt	Response	Description
REQ	CHG	Change existing data block.
TYPE	RDB	Route Data Block
CUST	xx	Customer number as defined in LD 15.
ROUT		Route number
	0-511	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-127	Range for Small System
DES	x...x	Designator field for trunk (0-16 alphanumeric characters)
TKTP	a...a	Trunk Type
...		
CDR	(NO) YES	Call Detail Recording
- CDRX	(NO) YES	CDR X records printed for multiple call transfers of non-metered outgoing trunks.

### Station activity Call Detail Recording

The Station activity Call Detail Recording (SCDR) package 251 is an extension of the Internal Call Detail Recording (ICDR) functionality.

ICDR phones defined as Internal Call Detail Recording Allowed (ICDA) generate "L" records for internal connections. If a route with CDR set to NO either terminates on, or is accessed by, an ICDA phone, no "L" record is generated.

SCDR phones assigned a Call Detail Monitoring (CDMA) Class of Service output D records whenever a trunk is accessed by, or terminates on, the phone. The D record is output regardless of the CDR settings in the Route Data Block (LD 16). The Customer Data Block (LD 15), however, must have CDR allowed. SCDR uses the first line of the NEW CDR format to output its information.

## Feature implementation

### Task summary list

The following is a summary of the tasks in this section:

1. [Table 118 "LD 10 - Configure analog \(500/2500-type\) phones with Call Detail Monitoring Class of Service." \(page 118\)](#)
2. [Table 119 "LD 11 - Configure Meridian 1 proprietary phones with Call Detail Monitoring Class of Service." \(page 118\)](#)
3. [Table 120 "LD 27 - Configure Basic Rate Interface DSL with Call Detail Monitoring Class of Service." \(page 119\)](#)

**Table 118**

**LD 10 - Configure analog (500/2500-type) phones with Call Detail Monitoring Class of Service.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	a...a	Phone type
...		
CLS		Class of Service
	(CDMD) CDMA	Call Detail Monitoring (Denied) Allowed

**Table 119**

**LD 11 - Configure Meridian 1 proprietary phones with Call Detail Monitoring Class of Service.**

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	a...a	Phone type
...		
CLS		Class of Service
	(CDMD) CDMA	Call Detail Monitoring (Denied) Allowed

Table 120

LD 27 - Configure Basic Rate Interface DSL with Call Detail Monitoring Class of Service.

Prompt	Response	Description
REQ	CHG	Change existing data.
TYPE	DSL	Digital Subscriber Loop
DSL	l s c dsl	Digital Subscriber Loop address
...		
CLS		Class of Service
	(CDMD) CDMA	Call Detail Monitoring (Denied) Allowed

## Terminating Carriage Control

This feature provides a carriage return option to signal a computer that a CDR message is complete. An additional carriage return precedes every CDR record. A single CDR record consists of a carriage return, a line of data, and another carriage return, and results in every other record being a null record. This option is implemented through service change and, when implemented, applies to all CDR TTY ports in the system.

### Feature implementation

Table 121

LD 15 - Configure the Terminating Carriage Control feature.

Prompt	Response	Description
REQ	CHG	Change existing data block
TYPE	CDR	Call Detail Recording
CUST		Customer number
	0-99	Range for Large System, Call Server 1000E, and Media Gateway 1000E
	0-31	Range for Small System
CDR	(NO) YES	Change Call Detail Recording data
...		
TRCR	(NO) YES	Carriage Return sent after each CDR message



---

# Administration

---

## Contents

This section contains information on the following topics:

[“Introduction” \(page 121\)](#)

[“Feature implementation” \(page 121\)](#)

[“Establishing baud rates” \(page 132\)](#)

## Introduction

This section explains how to configure various Call Detail Recording (CDR) features and options.

## Feature implementation

### Task summary list

The following is a summary of the tasks in this section:

1. [Table 122 "LD 17 - Configure CDR in the Configuration Record." \(page 122\)](#)
2. [Table 123 "LD 15 - Configure CDR in the Customer Data Block." \(page 123\)](#)
3. [Table 124 "LD 16 - Configure CDR in the Route Data Block." \(page 124\)](#)
4. [Table 125 "LD 10 - Configure CDR for the analog \(500/2500-type\) phones." \(page 128\)](#)
5. [Table 126 "LD 11 - Configure CDR for Meridian 1 proprietary phones." \(page 129\)](#)
6. [Table 127 "LD 12 - Configure CDR for attendant consoles." \(page 129\)](#)
7. [Table 128 "LD 14 - Configure CDR in the Trunk Data Block." \(page 130\)](#)
8. [Table 129 "LD 19 - Configure CDR for FGD ANI in the Code Restriction Data Block." \(page 130\)](#)

9. Table 130 "LD 27 - Configure CDR in the ISDN Basic Rate Interface (BRI) Data Block." (page 131)
10. Table 131 "LD 88 - Configure CDR in the Authorization Code Data Block." (page 131)

**Table 122**  
**LD 17 - Configure CDR in the Configuration Record.**

Prompt	Response	Description
...		
ADAN	NEW TTY x	Configure new port (where: <b>x</b> is the port number).
	CHG TTY x	Change existing port (where: <b>x</b> is the port number).
...		
- USER	CTY	Enter CTY if port is to be a CDR Teletype port.
	CDL	Enter CDL if port is to be a CDR Data Link port.
...		
PARM	YES	Parameters
...		
- FCDR		Format CDR
	(OLD)	Enter OLD if old CDR format is required.
	NEW	Enter NEW if New Format CDR is required.
		FCDR is prompted if FCDR package 234 equipped.
- PCDR		Priority for CDR
	(NO)	No priority for CDR
	YES	Priority for CDR  When PCDR = YES, the call processing capabilities of the system can degrade. PCDR = YES allows CDR to take precedence over Call Processing when Call Registers are assigned.
- DUR5		Half-second Duration
	(NO)	Use two-second accuracy.
	YES	Use half-second accuracy.
		Prompted if JPN package 97 is equipped.
...		
- MTRO		Metering Option
	(MR)	Enter MR for non-Periodic Pulse Metering and non-Advice of Charge environments.
	PPM	Enter PPM for Periodic Pulse Metering and Advice of Charge environments

**Table 122**  
**LD 17 - Configure CDR in the Configuration Record. (cont'd.)**

Prompt	Response	Description
...		
CLID		Calling Line ID
	(NO)	Calling Line ID not included in CDR records
	YES	Calling Line ID included in CDR records

**Table 123**  
**LD 15 - Configure CDR in the Customer Data Block.**

Prompt	Response	Description
...		
OPT		Options for the specified customer
	(TTAD)	Time to Answer information and Abandoned call records Denied (default).
	TTAA	Time to Answer information and Abandoned call records Allowed
...		
CDR		Call Detail Recording
	(NO)	Do not modify CDR options for the specified customer.
	YES	Modify CDR options for the specified customer.
IMPH		Incoming Meridian 1 Packet Handler CDR
	(NO)	Do not print CDR records for incoming packet data calls.
	YES	Print CDR records for incoming packet data calls.
OMPH		Outgoing Meridian 1 Packet Handler CDR
	(NO)	Do not print CDR records for outgoing packet data calls.
	YES	Print CDR records for outgoing packet data calls
AXID		Auxiliary Identification
	(NO)	No Auxiliary Identification in CDR records
	YES	Auxiliary Identification in CDR records
TRCR		Terminating Carriage Return
	(NO)	No Carriage Return after records on CTY
	YES	Carriage Return after records on CTY
CDPR		Coordinated Dialing Plan (CDP) CDR Enhancement
	(NO)	Replace Distant Steering Code (DSC) or Trunk Steering Code (TSC) with trunk route Access Code (ACOD)
	YES	Insert ACOD ahead of Distant Steering Code (DSC) or Trunk Steering Code (TSC)

**Table 123**  
**LD 15 - Configure CDR in the Customer Data Block. (cont'd.)**

Prompt	Response	Description
ECDR		End-to-End Signaling digits in CDR record
	(NO)	Do not include End-to-End Signaling digits in CDR.
	YES	Include End-to-End Signaling digits in CDR.
OTCR		Original Trunk CDR Required
	(NO)	Use CDR options of the trunk route the call stepped to
	YES	Use CDR options of route call stepped from
		OTCR specifies which trunk route's CDR options to use when a call steps to, or from another route
PORT		CDR port
	0-15	Enter port number(s) to use for the specified customer
		Enter a carriage return <cr> by itself to stop the prompting of PORT.
PCDL		PPM and Advice of Charge (AOC) output on CDR Data Link
	(NO)	No PPM (AOC) information output on CDR Data Link
	YES	PPM (AOC) information output on CDR Data Link
UCST		Unit Cost per Periodic Pulse Metering pulse or Advice of Charge (AOC) unit
	0 -9999	Enter the Unit Cost of each PPM pulse or AOC unit. 0 disables the feature.

**Table 124**  
**LD 16 - Configure CDR in the Route Data Block.**

Prompt	Response	Description
...		
AUTO	YES	Auto Terminate
...		
- DNIS		Dialed Number Identification Service
	(NO)	DNIS not allowed on this route.
	YES	DNIS allowed on this route.
- - NDGT		Number of DNIS Digits required on this route
	1-(4)-7	Enter the number of digits required on this route.
- - WDGT		Which DNIS Digits
	(L)	Enter L to output the last four (4) digits of the DNIS number in the Call Detail Record
	F	Enter F to output the first four (4) digits of the DNIS number in the Call Detail Record

**Table 124**  
**LD 16 - Configure CDR in the Route Data Block. (cont'd.)**

Prompt	Response	Description
		WDGT is prompted when NDGT is set to a value greater than four (4) and FCDR package 234 is not equipped, or FCDR is set to "OLD".
- - DCDR		DNIS in CDR
	(NO)	No DNIS number output in CDR
	YES	DNIS number output in CDR
...		
CNTL	(NO) YES	Changes to Controls or timers
- TIMR	aaa xxx	Trunk Timers
	EOD 1024	End of dial timer, non-digitone trunks. Enter this value to allow normal CDR operation.
	ODT 1024	End of dial timer, digitone trunks. Enter this value to allow normal CDR operation
....		
CDR		Call Detail Recording
	(NO)	No CDR output for the specified route
	YES	CDR output for the specified route
- INC		Incoming
	(NO)	No CDR output for incoming calls
	YES	CDR output for all incoming calls
- LAST		CDR record printing content option for redirected calls
	(NO)	The terminating ID field in the CDR record will contain the one before the last party.
	YES	The terminating ID field in the CDR record will contain the last party.
- TTA		Time to Answer
	(NO)	No Time to Answer information output
	YES	Time to Answer information output
- ABAN		Abandoned call records
	(NO)	No Abandoned call records output
	YES	Abandoned call records output
- QREC		Q Record
	(NO)	No Initial connection (Q) record output for incoming calls
	YES	Initial connection (Q) record output for incoming calls

**Table 124**  
**LD 16 - Configure CDR in the Route Data Block. (cont'd.)**

Prompt	Response	Description
- OAL		Outgoing All
	(NO)	No CDR output for all outgoing calls
	YES	CDR output for all outgoing calls
		If Answer Supervision is defined for the trunk, CDR records will only be generated on call completion.
- - OTL		Outgoing Toll
	(NO)	No CDR output for all outgoing toll calls
	YES	CDR output for all outgoing toll calls
		OTL is prompted when OAL = NO and TKTP = CAM, COT, DID, FEX or WAT. If Answer Supervision is defined for the trunk, CDR records will only be generated on call completion.
- - AIA		Answered call Identification Allowed
	(NO)	Do not enable Answered call Identification Allowed
	YES	Enable Answered call Identification Allowed
		AIA is prompted when OAL = YES or OTL = YES. Answered calls are identified by an "A" as the first character in the ORIGID or TERID.
- - OAN		Outgoing Answered
	NO	CDR output for all outgoing calls
	YES	CDR output for answered outgoing calls only
		OAN is only prompted if OAL = YES or OTL = YES. This prompt applies to trunks with Answer Supervision (CLS = PSP, or SUPN = YES).
		If the Supplementary features (SUPP) package is equipped, the default is NO. If SUPP 131 is not equipped, the default is YES.
- - OPD		Outpulsed Digits
	(YES)	Outpulsed digits output in CDR
	NO	Dialed digits output in CDR
		OPD is prompted when OTL = YES, OAL = YES, or OAN = YES. The system must be initialized for changes to the OPD settings to take effect.
- - NDP		Number of Digits to Print
	INC 0-32	Output the first 0-32 digits
	EXC 0-32	Suppress the last 0-32 digits

**Table 124**  
**LD 16 - Configure CDR in the Route Data Block. (cont'd.)**

Prompt	Response	Description
		NDP defaults to output all digits.
- CDRX		Call Detail Recording X (Transfer) records for non-metered trunks
	(NO)	X (Transfer) records are not output for non-metered trunks.
	YES	X (Transfer) records are output for non-metered trunks.
- CDRY		Call Detail Recording Y (Public Network Feature Invocation) records
	(NO)	Call Detail Recording Y (Public Network Feature Invocation) records will not be output for this route.
	YES	Call Detail Recording Y (Public Network Feature Invocation) records will be output for this route.
OPA		Outgoing PPM Answer
	(YES)	Outgoing unsupervised trunks will be considered as answered when PPM pulses are received.
	NO	Outgoing unsupervised trunks will not be considered as answered when PPM pulses are received.
CCO		Call Charge Output option
	(NO)	CDR N (Normal) records with no CHGINFO will be printed.
	YES	CDR N (Normal) records with no CHGINFO will not be printed.
...		
IDOP		Identify Original Party
	(NO)	CDR outputs forwarding station as originator
	YES	CDR outputs forwarded (original) party as originator
		IDOP is prompted when CFWR = NO
...		
MR		Message Registration
	(NO)	The route is not metered.
	STAC	The AOC information is decoded at the start of the call.
	DURC	The AOC information is decoded during and at the end of the call.
	ENDC	The AOC information is decoded at the end of the call.
	PPM	Buffered Periodic Pulse Metering signals to be counted on this route.
	RVB	Reverse battery signal from PSTN/CO interpreted as supervisory signal and used as MR on this route.

**Table 124**  
**LD 16 - Configure CDR in the Route Data Block. (cont'd.)**

Prompt	Response	Description
	XLD	M&MM Lead non-buffered is used on this route.
...		
RUCS		Route Unit Cost per PPM pulse or AOC unit
	0-9999	Enter the Unit Cost of each PPM pulse or AOC unit. An entry of 0 disables the feature. The default is the value entered in LD 15 in response to the UCST prompt.
RURC	x y	<p>Route Unit Reference Cost. The formula for Route Unit reference Cost is: <math>X * 10^{(-Y)}</math>, where:</p> <ul style="list-style-type: none"> <li>• <math>x = 0-9999</math></li> <li>• <math>y = (0)-3</math></li> </ul> <p>This gives a range from 001 to 9999.</p> <p>Call Charge scenarios:</p> <ul style="list-style-type: none"> <li>• When call charge is sent in currency: Displayed charge = (Received charge/RURC) * RUCS</li> <li>• When call charge is sent in AOC units: Displayed charge = (Received charge * RUCF) * RUCS units</li> </ul>
RUCF		Route Unit Conversion Factor
	0-9999 0-3	
		<p>Enter Route Unit Conversion Factor required. Applicable to AOC (MR = ENDC of MR = DURC) only</p> <p>Formula for Route Unit Conversion Factor is: <math>X * 10^{(-Y)}</math>, where:</p> <ul style="list-style-type: none"> <li>• <math>X = 0-9999</math></li> <li>• <math>Y = 0-3</math></li> </ul> <p>This yields a conversion factor range of 0.001 to 9999. The default is 1 0, which results in a RUCS of 1.</p>

**Table 125**  
**LD 10 - Configure CDR for the analog (500/2500-type) phones.**

Prompt	Response	Description
...		
CLS		Class of Service options

**Table 125**  
**LD 10 - Configure CDR for the analog (500/2500-type) phones. (cont'd.)**

Prompt	Response	Description
	(ABDD)	Abandoned call record and Time to Answer Denied (default)
	ABDA	Abandoned call record and Time to Answer Allowed
	(CDMD)	Call Detail Monitoring Denied (Station activity Call Detail Recording) (default)
	CDMA	Call Detail Monitoring Allowed (Station activity Call Detail Recording)
	(ICDD)	Internal Call Detail Recording Denied (default)
	ICDA	Internal Call Detail Recording Allowed

**Table 126**  
**LD 11 - Configure CDR for Meridian 1 proprietary phones.**

Prompt	Response	Description
...		
CLS		Class of Service options
	(ABDD)	Abandoned call record and Time to Answer Denied (default)
	ABDA	Abandoned call record and Time to Answer Allowed
	(CDMD)	Call Detail Monitoring Denied (Station activity Call Detail Recording) (default)
	CDMA	Call Detail Monitoring Allowed (Station activity Call Detail Recording)
	(ICDD)	Internal Call Detail Recording Denied (default)
	ICDA	Internal Call Detail Recording Allowed
KEY		Phone function key assignments
	xx CHG	Key number, Charge account
	xx CPN	Key number, Calling Party Number

**Table 127**  
**LD 12 - Configure CDR for attendant consoles.**

Prompt	Response	Description
...		
ICDR		Internal CDR
	(ICDD)	Internal Call Detail Recording Denied (default)

**Table 127**  
**LD 12 - Configure CDR for attendant consoles. (cont'd.)**

Prompt	Response	Description
	ICDA	Internal Call Detail Recording Allowed
ABAN		Abandoned call record
	(ABDD)	Abandoned call record and Time to Answer Denied (default)
	ABDA	Abandoned call record and Time to Answer Allowed
....		
KEY		Console function key assignments
	xx CHG	Key number, Charge account
	xx CPN	Key number, Calling Party Number

**Table 128**  
**LD 14 - Configure CDR in the Trunk Data Block.**

Prompt	Response	Description
...		
CLS		Class Of Service options
	(CND)	Calling Number Identification Denied (default)
	CNA	Calling Number Identification Allowed. CNA requires an MFC Class of Service.
	(PIP)	Polarity Insensitive Pack (for QPC 330 and QPC 331 cards) (default)
	PSP	Polarity Sensitive Pack (for QPC 218, QPC 219 and QPC 295 cards)
	BST	Battery Supervised (SIGL = LOP is required)
	(XBAT)	Battery Supervised COT denied (default)
	BAT	Battery Supervised COT allowed
		Must have TYPE = COT, XTRK = XCOT, SIGL = LOP and international XFCOT trunk card.

**Table 129**  
**LD 19 - Configure CDR for FGD ANI in the Code Restriction Data Block.**

Prompt	Response	Description
...		
CDAN		CDR to include Automatic Number Identification.
	(NO)	No ANI information output in CDR records (default)

Table 129

LD 19 - Configure CDR for FGD ANI in the Code Restriction Data Block. (cont'd.)

Prompt	Response	Description
	YES	ANI information output in CDR records

Table 130

LD 27 - Configure CDR in the ISDN Basic Rate Interface (BRI) Data Block.

Prompt	Response	Description
...		
TYPE	DSL	Digital Subscriber Loop
...		
CLS		Class Of Service options
	(ABDD)	Abandoned call record and Time to Answer Denied (default)
	ABDA	Abandoned call record and Time to Answer Allowed
	(CDMD)	Call Detail Monitoring Denied (Default) (Station activity Call Detail Recording) (default)
	CDMA	Call Detail Monitoring Denied Allowed (Station activity Call Detail Recording)
	(ICDD)	Internal Call Detail Recording Denied (default)
	ICDA	Internal Call Detail Recording Allowed
...		
TYPE	TSP	Terminal Service Profile
...		
CDR		Internal CDR
	(NO)	Do not print Internal CDR records packet data calls (default)
	YES	Print Internal CDR records for packet data calls.

Table 131

LD 88 - Configure CDR in the Authorization Code Data Block.

Prompt	Response	Description
...		
ACDR		Authorization codes in CDR. The ACDR prompt has no default.
	NO	No authorization codes output in CDR
	YES	Authorization codes output in CDR

**Table 131**  
**LD 88 - Configure CDR in the Authorization Code Data Block. (cont'd.)**

Prompt	Response	Description
SCDR		Scheduled Access Restriction Flexible Feature Codes in CDR. The SCDR prompt has no default.
	NO	No Scheduled Access Restriction Flexible Feature Codes output in CDR
	YES	Scheduled Access Restriction Flexible Feature Codes output in CDR

## Establishing baud rates

A CDR record typically has one 80-character line (two if Multi-Tenant Service, CLID, or Feature Group D ANI is involved) and an average length of 100 bytes when the OLD CDR format is selected.

When the NEW CDR format is selected, an 86-character first line is output, followed by an 85-character second line and a 42-character third line. If the Time to Answer feature is active, a third 13-character line is output.

A system with CDR can run out of call registers (CRs) for call processing if the SDI interface transmission rate is less than that of the CDR record generation. The SDI baud rate must be high enough that records do not accumulate in the system output buffer, causing a shortage of call registers.

The Average Busy Season Busy Hour (ABSBH) traffic data provides a starting point for calculating the required capacity. The capacity includes a 30% reserve to accommodate traffic peaks.

Table 132 "CDR data rate and system call capacity: record length 100 characters" (page 133) and Table 133 "CDR data rate and system call capacity: record length 160 characters" (page 133) show the relationship between baud rate and the number of CDR calls per hour for two different record lengths: 100 characters (an average record) and 160 characters (the maximum length) respectively. The tables rely on the following calculations:

$$\text{SDI port baud rate} \times 0.70 / \text{record length} = \text{records that can be transmitted per second}$$

$$\text{Records transmitted per second} \times 60 \times 60 = \text{CDR hourly call capacity.}$$

Table 132 "CDR data rate and system call capacity: record length 100 characters" (page 133) and Table 133 "CDR data rate and system call capacity: record length 160 characters" (page 133), which apply to all

system CPUs, assume that each call uses one call per record. [Table 133 "CDR data rate and system call capacity: record length 160 characters" \(page 133\)](#) shows the worst-case scenario, with each record at the maximum 160-character length. For other record lengths, interpolate between the two tables.

**Table 132**  
**CDR data rate and system call capacity: record length 100 characters**

<b>Baud Rate</b>	300	1200	2400	4800	9600
<b>CDR calls per hour</b>	1035	4140	8280	16560	33120

**Table 133**  
**CDR data rate and system call capacity: record length 160 characters**

<b>Baud Rate</b>	300	1200	2400	4800	9600
<b>CDR calls per hour</b>	649	2,596	5,192	10,384	20,768

The table data ignores potential system limitations such as real time or traffic constraints that need to be engineered separately.

Only calls generating CDR records must be included in capacity estimations. For example, some systems keep CDR records only for outgoing calls. Exclude calls that do not generate records from the capacity calculations.



# Call record fields

## Contents

This section contains information on the following topics:

[“Introduction” \(page 135\)](#)

[“TTY record fields” \(page 137\)](#)

## Introduction

This chapter describes each call record field and defines its format. [Table 134 "Field Descriptions" \(page 135\)](#) lists each field and the page on which it is described. [Table 135 "Field to Record Matrix" \(page 136\)](#) relates record types to record fields and graphically indicates which fields apply to each record type.

**Table 134**  
**Field Descriptions**

Field	Definition
RECTYPE	<a href="#">“RECTYPE: Record Type” (page 137)</a>
RECNO	<a href="#">“RECNO: Record Number” (page 138)</a>
CUSTNO	<a href="#">“CUSTNO: Customer Number” (page 138)</a>
ORIGID	<a href="#">“ORIGID: Originator Identification” (page 138)</a>
TERID	<a href="#">“TERID: Terminator Identification” (page 140)</a>
TIMESTAMP	<a href="#">“TIMESTAMP: Time stamp” (page 141)</a>
DURATION	<a href="#">“DURATION: Call Duration” (page 143)</a>
INPACK	<a href="#">“INPACK: Incoming packet count” (page 154)</a>
OUTPACK	<a href="#">“OUTPACK: Outgoing packet count” (page 154)</a>
DIGITTYPE	<a href="#">“DIGITYPE: Digit Type Identifier” (page 145)</a>
DIGITS	<a href="#">“DIGITS: Digits” (page 145)</a>
CLID	<a href="#">“CLID: Calling Line Identification” (page 150)</a>
CHGINFO	<a href="#">“CHGINFO: Charge Information” (page 149)</a>

**Table 134**  
**Field Descriptions (cont'd.)**

Field	Definition
CALLCHG	"CALLCHG: Call Charge" (page 149)
FGDANI	"FGDANI: Feature Group D Automatic Number Identification" (page 151)
DNIS	"DNIS: Dialed Number Identification Service" (page 152)
ORIGAUXID	"ORIGID: Originator Identification" (page 138)
TERMAUXID	"TERMAUXID: Terminating Auxiliary Identification" (page 141)
ORIGTEN0	"ORIGTEN0 and TERTEN0: Originating/Terminating Tenant Number" (page 149)
TERTEN0	"ORIGTEN0 and TERTEN0: Originating/Terminating Tenant Number" (page 149)
TTA*	"TTA: Time to Answer (TTY only)" (page 153)
BLID	"BLID: Billing Line Identification (TTY only)" (page 154)
M911	"M911: M911 Call Abandon" (page 155)
000	"000: CDR 100 Hour Call" (page 155)
B	"B: Busy Tone Identifier" (page 156)

**Note:** In Table 135 "Field to Record Matrix" (page 136), if NEW CDR format is selected, all fields are output. If the field is blank, it is output as spaces.

**Table 135**  
**Field to Record Matrix**

		RECORD TYPE																			
		A	B	C	D	E	F	G	H	I	L	M	N	P	Q	R	S	T	X	Y	
FIELD	RECTYPE	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I	
	RECNO	I	I	I	I	I	I	I	I		I	I	I	I	I	I	I		I	I	
	CUSTNO	I	I	I	I	I	I	I	I		I	I	I	I	I	I	I		I	I	
	ORIGID	I	I	I	I	I	I	I	I		I	I	I	I	I	I	I		I	I	
	TERID	I	I	I	I	I	I	I	I		I	I	I	I	I	I	I		I	I	
	TIMESTAMP	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I	
	DURATION		I		I	I	I	I	I		I		I		I	I	I		I	I	
	INPACK							I	I												
	OUTPACK							I	I												
	DIGITTYPE					I	I						I		I	I	I		I		
* Fields marked with an asterisk are optional.																					

		RECORD TYPE																			
		A	B	C	D	E	F	G	H	I	L	M	N	P	Q	R	S	T	X	Y	
	DIGITS																				
	CLID *																				
	CHGINFO *																				
	CALLCHG *																				
	FGDANI *																				
	DNIS *																				
	ORIGAUXID *																				
	TERMAUXID *																				
	ORIGTEN0 *																				
	TERTENO *																				
	TTA *																				
	BLID																				
	M911 *																				
	000 *																				
	* Fields marked with an asterisk are optional.																				

## TTY record fields

A call record on a TTY or printer contains the following fields.

### RECTYPE: Record Type

The Record Type (RECTYPE) field indicates the type of call record. The field consists of a single letter identifying the type of record:

A	Authorization Code
B	Abandoned call
C	Charge
D	Station Activity
E	End
G	Internal Meridian 1 Packet Handler data call
H	External Meridian 1 Packet Handler data call
F	Connection (Conference connection)
I	Initialization
L	Internal call
M	Charge for Conference
N	Normal

P	Calling Party Number
Q	Connection (initial connection)
R	Connection (transfer connection)
S	Start
T	Time stamp
X	Transfer
Y	Public Network Feature Invocation

See the chapter titled [“Call record types” \(page 175\)](#) for a full description of each record type.

**RECNO: Record Number**

The Record Number (RECNO) field identifies the number of the current record in the CDR sequence. The field is a three-character field that gives the record sequence number. It is right-justified for the OLD CDR format and left-justified for the NEW CDR format.

The RECNO field format is:

xxx

Where: xxx = Record Number (000-127)

**CUSTNO: Customer Number**

The Customer Number (CUSTNO) field identifies the customer associated with the call. The field is a two-character field that identifies the customer number.

The CUSTNO field format is:

xx

Where: xx = Customer Number (00-99)

**ORIGID: Originator Identification**

For all record types, except G and H, the Originator Identification (ORIGID) field identifies the apparatus that originated the call. The field output format depends on the type of equipment as follows:

1. Stations are identified in the form DNxxxx, where xxxx = prime DN for the phone.
2. When the CDRE package is equipped, the format DNxxxx is replaced by xxxxxxxx to accommodate up to 7 digits.

3. Trunks have the ORIGID field in the format Trrrmmm, where rrr = route number and mmm = member number. For ISA calls, rrr = the service route number and mmm = the master route member number.
4. Attendants are identified in the form ATTNxx, where xx = the console number (1-63).
5. Conference loops are identified in the form CFllnn, where ll = loop number 0-159 and nn = the conference number.
6. Arrrrmmm, Trrrrmmm or TNxxxx

Where:

- A = Answer Supervision was received on an answer supervised trunk output (if AIA = YES in LD 16)
- T = Option AIA was set to NO in LD 16, or the terminator was an unsupervised trunk, or the terminator was a supervised trunk and the call was not answered.
- rrr = route number (000-511). For Integrated Service Access (ISA) calls, rrr = the service route number.
- mmm = member number (000-254). For ISA calls, mmm = the master route member number.
- TN = packed Terminal Number. The TN format is xxxx, where: x = 0-9, A,B,C,D,E, or F

The Answer Supervision record is identified by an "A" in the ORIGID field of the TTY output.

If trunks are equipped with Answer Supervision but no Answer Supervision is received during the call, the duration of the call is calculated from the time of trunk seizure. This type of record is still identified by a "T" in the ORIGID field of the TTY output.

For the G and H record types, the ORIGID is a 14 character-wide, left justified field. The ORIGID field is located on the first line and occupies positions 10 to 23. Its contents are:

- The Data Network Address (DNA) for internal or external outgoing calls, or
- The TN of the incoming link, either Meridian Communications Unit (MCU) or Primary Rate Interface (PRI) for external incoming calls.

**TERID: Terminator Identification**

For all record types, except the G and H records, the Terminating Identification (TERID) field identifies the apparatus on which a call is terminated. The field output format depends on the type of equipment as follows:

1. Stations are identified in the form DNxxxx, where xxxx = the prime DN for the phone.
2. When the CDRE package is equipped, the format DNxxxx is replaced by xxxxxxxx to accommodate up to 7 digits.
3. Trunks have the ORIGID field in the format Trrmmm, where rrr = route number and mmm = member number.
4. Attendants are identified in the form ATTNxx, where xx = the console number (1-63).
5. Conference loops are identified in the form CFllnn, where ll = loop number 0-159 and nn = conference number.
6. rrrmmm, Trrmmm or TNxxxx

Where:

- A = Answer Supervision was received on an Answer Supervised trunk output (if AIA = YES in LD 16)
- T = Option AIA was set to NO in LD 16, or the terminator was an unsupervised trunk, or the terminator was a supervised trunk, and the call was not answered.
- rrr = route number (000-511). For Integrated Service Access (ISA) calls, rrr = the service route number.
- mmm = member number (000--510). For ISA calls, mmm represents the master route member number.
- TN = packed Terminal Number. The TN format is xxxx, where: x = 0-9, A,B,C,D,E, or F.

The Answer Supervision record is identified by an "A" in the TERID field of the TTY output.

If Answer Supervision is not received during the call, although the trunks are equipped with Answer Supervision, the duration of the call is calculated from the time of trunk seizure. This type of record is still identified by a "T" in the TERID field of the TTY output.

For the G and H record types, the TERID is a 14-character wide, left justified field. It is located on the first line and occupies positions 25 to 38. Its contents are:

- The Data Network Address (DNA) for internal or external incoming calls, or
- The TN of the incoming link, either Meridian Communications Unit (MCU) or Primary Rate Interface (PRI) for external outgoing calls.

### **AUXID: Auxiliary Identification**

The Auxiliary Identification (AUXID) field identifies the TN of the originating phone when the phone has a multiple appearance Prime DN, and cannot be uniquely identified by ORIGID. This field is output in the OLD CDR format and is used as the originating auxiliary identification field for L (Internal) records. Whether the AUXID is to be printed or not is determined by the response to the AXID prompt in LD 15.

The field format is:

LLL.S.CC.UU

Where:

LLL = Loop (000-255)

S = Shelf (0-3)

CC = Card (00-15)

UU = Unit (00-31)

### **TERMAUXID: Terminating Auxiliary Identification**

The Terminating Auxiliary Identification (TERMAUXID) field identifies the TN of the terminating phone when the phone has a multiple appearance Prime DN, and cannot be uniquely identified by TERID. This field is output in the OLD CDR format and is used as the terminating auxiliary identification field for L (Internal) records. The TERMAUXID field format is the same as the AUXID field format.

### **TIMESTAMP: Time stamp**

The Time stamp (TIMESTAMP) field gives the date and time. Its exact definition depends on the type of record:

Record Type	Timestamp
N (Normal)	start of call
L (Internal) without call modification	end of call
L (Internal) with call modification	at completion of the call modification
S (Start)	start of call
E (End)	end of call
I (Initialization)	time of system initialization

Record Type	Timestamp
T (Time stamp)	old or new time stamp
X (Transfer)	completion of transfer
F, Q, and R (Connection)	time of connection
H	start of call
G	start of call
D	end of call
Y	time of feature invocation attempt (second flash for "PSTN Three Party Conferencing)

If the call started on the last day of a month and stopped on the first day of the next month, the start day is shown as day 0 of the next month.

The Time stamp (TIMESTAMP) field format for the OLD CDR format is:

MO/DD HH:MI

Where:

MO = month (1-12)  
/ = forward slash character  
DD = day (0-31)  
space character  
HH = hour (0-23)  
: = colon character  
MI = minute (0-59)

**Note:** If the call started on the last day of a month and stopped on the first day of the next month, the start day is shown as day 0 of the next month.

The Time stamp (TIMESTAMP) field format for the NEW CDR format is:

MO/DD HH:MI:SS

where:

MO = month (1-12)  
/ = forward slash character  
DD = day (0-31)  
space character  
HH = hour (0-23)  
: = colon character

MI = minute (0-59)  
: = colon character  
SS = second (0-59)

### **DURATION: Call Duration**

The call duration (DURATION) field, as the name implies, is used to output the duration of the call. The duration accuracy is dependent on whether the Japan Central Office trunks package 97 is equipped.

Note that the CDR 100-Hour Call feature increases the maximum recordable duration of a call from approximately 100 to 100,000 hours. To achieve this result, the CDR 100-Hour Call feature introduces a new "000" field in the third line of all FCDR record types which have a Duration field. See ["000: CDR 100 Hour Call" \(page 155\)](#) for more information.

If the Japan Central Office trunks package 97 is equipped, DUR5 will be a sub-prompt of the PARM prompt in LD 17. If DUR5 = YES, the duration is calculated to within a half-second of the actual duration. If DUR5 = NO, or if the Japan Central Office trunks package (97) is not equipped, the duration is calculated to within two-seconds of the actual duration.

In a N (Normal) record, this is the duration of the call from start to disconnect. In a S (Start) record, this is the duration of the call from the start to the first feature usage at the time given by TIMESTAMP. Incoming call duration is measured from the time the call is first presented to the terminating phone. Outgoing call duration is measured from the time a trunk is first seized (dial tone removed), except for cases where records are only produced upon receipt of Answer Supervision where the call duration starts upon receipt of Answer Supervision.

In an E (End) record, the duration is the total time for the call less the duration of the first segment (which is given in the corresponding S [Start] record). The total call duration is the sum of the duration given in the S (Start) and E (End) records.

In an X (Transfer) record with CDR Transfer Enhancement (CDRX) active, the duration is included and is calculated dependant on the type of transfer. For internal transfers, the duration is calculated from the time the transferring party answered until the transferred-to party answers. For network transfers, the duration is calculated from the time the transferring party completes the transfer until the transferred-to party either disconnects or completes another transfer.

In a L (Internal) record, the duration of a simple call is measured from connection to release. With call modification, the duration is measured from the start of the call or call modification, to disconnect or another call modification.

On a route where trunks are equipped with Answer Supervision and supervision is received during the call, the duration of the call is calculated from the time Answer Supervision is received to the time of disconnect.

On a route where trunks are not equipped with Answer Supervision, the duration of the call is calculated from the time of seizure to the time of disconnect.

In a Y (Public Network Feature Invocation) record, the duration field indicates either the duration from the start of the original call, or the duration from the previous invocation attempt to the present invocation attempt.

The following is the Call Duration (DURATION) field format:

1. HH:MI:SS

(when two-second accuracy call duration is in effect for OLD CDR format)

Where: HH = hour (0-99), : = colon character, MI = minute (0-59), : = colon character, SS = second (0-59)

Start records output using the OLD CDR format on TTY do not contain a DURATION field.

2. HH:MI:SS.S

(when half-second accuracy call duration is in effect for OLD CDR format)

Where: HH = hour (0-99), : = colon character, MI = minute (0-59), : = colon character, SS = second (0-9), . = period character, S = half-second duration indication (0 or 5)

Start records output using the OLD CDR format on TTY do not contain a DURATION field.

3. HH:MI:SS.S

(when either two- or half-second accuracy call duration is in effect for the NEW CDR format)

Where: HH = hour (0-99), : = colon character, MI = minute (0-59), : = colon character, SS = second (0-59), . = period character, S = half-second duration indication (0 or 5)

The Answer Supervision record is identified by an "A" in the ORIGID or TERID field of the CDR TTY output if the following conditions are met:

- Trunk has Answer Supervision
- Option to allow Answer Indication selected (AIA = YES in LD 16)

If Answer Supervision is not received during the call, although the trunks are equipped with Answer Supervision, the duration of the call is calculated from the time of trunk seizure. This type of record is still identified by a "T" in the ORIGID or TERID field of the CDR TTY output.

CDR Answer Supervision for Ground Start and Loop Start trunks detects Answer Supervision on Ground and Loop Start trunks when sent as reverse battery from the Central Office, and generates Call Detail Records based on the actual answer received rather than trunk seizure. Call Detail Recording begins when Answer Supervision is received from the CO.

Trunks connected to XUT cards can have LOOP Start Answer Supervision capability through the PSP class of service.

### **DIGITYPE: Digit Type Identifier**

The Digits Type Identifier (DIGITYPE) is used to identify the BARS/NARS routing used by an outgoing call or to indicate that the DIGITS field is storing Multi-Frequency Compelled (MFC) Calling Number Information (CNI) digits for an incoming call.

The Digit Type Identifier (DIGITYPE) field is included in the DIGITS field in the NEW CDR format. The Digit Type Identifier (DIGITYPE) field is an independent field in the OLD CDR format.

The DIGITYPE format is: a

Where: a = one of the following:

- A = Automatic Route Selection used to route an outgoing call
- E = BARS/NARS Expensive route was used to route an outgoing call
- C = MFC Calling Number Information digits are stored for an incoming call

### **DIGITS: Digits**

The Digits (DIGITS) field identifies the digits dialed, digits outpulsed, Charge Account code, received Multi-Frequency Compelled Calling Number Identification digits, Authorization Code entered, or Scheduled Access Restriction Flexible Feature Code entered.

### **Dictation and paging trunks**

The CDR printout for dictation and paging trunks accessed by an analog (500/2500-type) phone specifies only the trunk access code in the DIGITS field. Dictation trunks require tones to instruct the machines at the far-end.

The 2500-type phone sends these tones directly to the dictation trunk without using a call register to store digits. As these digits are not stored in a call register, the CDR cannot print them out.

With 500-type and Meridian 1 proprietary phones, the digits must be stored in a call register and then a Digitone Receiver (DTR) translates the digits into tones. Then, the CDR output shows all digits dialed by these phones.

### Route Selection

The digits that appear in the Digits field of Normal or Start records depend on Route Selection as shown in the following:

**RS-ANI** Digits shown are those that are actually outputted by the system after route selection and any required digit manipulation. The actual digits dialed are reflected only if no digit manipulation was required to process the call.

**BARS, CDP** Digits shown are those that are dialed with the exception of the BARS access code or CDP steering code which are replaced with the trunk access code.

An enhancement to CDR for CDP provides the customer with the following options:

- The current method of replacing the Distant Steering Code (DSC) or Trunk Steering Code (TSC) with the trunk access code
- Insert the access code before the dialed digits so that no digits are removed from the CDR record.
  - **NARS** Digits shown are those that are actually dialed. If NARS and RS-ANI exist together, the RS-ANI format is used. If NARS and BARS exist together, the BARS format is used.
  - **BARS/NARS with Outputted digits** As an option, the digits shown can be the digits actually outputted by the system.

### Outputted Digits

When the Outputted Digits (OPD) feature is enabled, the DIGITS field contains the digits actually outputted by the system. This only applies to Basic Alternate Route Selection (BARS), Network Alternate Route Selection (NARS), and Coordinated Dialing Plan (CDP) calls. If both the

BARS and NARS packages are equipped, the CDR record follows the BARS format by default, and the ESN or ISDN access code (AC1 or AC2) is replaced by the trunk access code.

**Note:** When OPD = YES in LD 16 and IFC = NI2 in LD 17, 011 is not included in the DIGITS field for international calls and 0 is not included in the DIGITS field for operator assisted calls. To see dialed digits in CDR output, OPD must be set to NO in LD 16.

Tables [Table 136 "BARS calls" \(page 147\)](#) to [Table 138 "All other NARS calls" \(page 147\)](#) show what will be placed in the DIGITS field of the CDR record. See also the N (Normal) record examples in this document.

**Table 136**  
**BARS calls**

Digits dialed: ESN or ISDN Access Code + digits	
OPD option used	Digits recorded in CDR
OPD = NO	Trunk Access Code + the digits dialed after the ESN or ISDN Access Code.  The ESN or ISDN Access Code is replaced by the Trunk Access Code.
OPD = YES	Trunk Access Code + the outpulsed digits.

**Table 137**  
**NARS calls**

Digits dialed: ESN or ISDN Access Code + Location Code + extension	
OPD option used	Digits recorded in CDR
OPD = NO	Actual digits dialed
OPD = YES (the call stays in the ESN or ISDN network)	ESN or ISDN Access Code + Location Code + outpulsed digits
OPD = YES (the call overflows to the public network)	ESN or ISDN Access Code + Trunk Access Code + outpulsed digits

**Table 138**  
**All other NARS calls**

Digits dialed: ESN or ISDN Access Code + digits	
OPD option used	Digits recorded in CDR
OPD = NO	Actual digits dialed
OPD = YES	ESN or ISDN Access Code + Trunk Access Code + outpulsed digits

**Table 139**  
**CDP calls with OPD and CDPR option**

Digits dialed: ESN or ISDN Access Code + digits	
OPD option used	Digits recorded in CDR
OPD = NO CDPR = NO	ESN or ISDN Access Code
CDPR = YES	ESN or ISDN Access Code + Trunk Access Code
OPD = YES	ESN or ISDN Access Code + Trunk Access Code + outpulsed digits

In a Y (Public Network Feature Invocation) record, the digits field indicates the digits applying to the feature accessed (that is, for PSTN Three Party Conferencing, this field contains the third party number).

The Digits (DIGITS) field allows up to 32 digits to be recorded.

In the OLD CDR format, the field is 34 characters wide. This allows for the inclusion of the DIGITYPE identifier.

The OLD CDR format DIGITS field format is one of the following:

A xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx

C xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx

E xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx

xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx

Where:

- x = 0-9
- A = Automatic Route Selection used to route an outgoing call
- C = MFC Calling Number Information digits are stored for an incoming call
- E = BARS/NARS Expensive route was used to route an outgoing call

The NEW CDR format DIGITS field format is:

xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx

Where: x = 0-9

All output is left justified and padded with blank characters if less than 32 digits. If more than 32 digits are dialed, only the first 16 are recorded correctly. Digit 33 and succeeding digits are cycled over digits 17 to 32.

When the International Supplementary Features (SUPP) package 131 is equipped, the number of digits to print is determined on a route-by-route basis. The number of digits to print is defined by the response to the Number of Digits to Print (NDP) prompt in LD 16.

### **ORIGTEN and TERTENO: Originating/Terminating Tenant Number**

The Originating Tenant (ORIGTEN) field identifies the Tenant Number that is associated with the ORIGID field. The Terminating Tenant (TERTENO) field identifies the Tenant Number that is associated with the TERID field. When the Multi-Tenant Service (TENS) package 86 is equipped, CDR formats include the originating and terminating Tenant Numbers.

The ORIGTEN and TERTENO field format is: xxx

Where: xxx = Tenant Number (000-512)

### **CHGINFO: Charge Information**

Charge Information is output for outgoing Periodic Pulse Metering (PPM) or Advice of Charge (AOC) Message Registration equipped trunks. The Charge Information (CHGINFO) field contains the following:

- Periodic Pulse count for PPM applications
- Charge Information — Information Element (IE) contents for AOC from a 1 TR 6
- AOC IE contents, for AOC from NUMERIS and SWISSNET

The CHGINFO field format is: xxxxx

Where: xxxxx = Charge Information (00000-32767)

### **CALLCHG: Call Charge**

Call Charge is output for outgoing Periodic Pulse Metering (PPM) or Advice of Charge (AOC) Message Registration equipped trunks. The Call Charge (CALLCHG) field contains the call cost, or is used as a meter overflow indication on TTY output.

For PPM equipped routes, the call cost is determined using the following formula:

$$\text{CALLCHG} = \text{CHGINFO} * \text{RUCS (as defined in LD 16)}$$

For AOC equipped routes, the call cost is determined using the following formula:

$$\text{CALLCHG} = \text{CHGINFO} * \text{RUCS (as defined in LD 16)} * \text{RUCF (as defined in LD 16)}$$

The CALLCHG field format is: aaaaaa

Where: aaaaaa = one of the following:

- call cost (000000 to 999999)
- CHXOVF—indicates CALLCHG field overflowed, use CHGINFO field and Route Unit Cost (RUCS) for PPM or Route Unit Cost (RUCS) and Route Unit Conversion Factor (RUCF) for AOC to calculate cost
- OVFO0—indicates terminal meter overflowed four times (terminal meter>262143)
- OVFO1—indicates terminal meter overflowed once (terminal meter>32767)
- OVFO2—indicates terminal meter overflowed twice (terminal meter>65535)
- OVFO3—indicates terminal meter overflowed three times (terminal meter>131071)
- OVFO99—indicates that AOC end of call (ENDC) sub-service is in effect. Output for S (Start) and X (Transfer) records. Charge information is output in the associated E (End) record.

### **CLID: Calling Line Identification**

Calling Line Identification (CLID) is a feature provided with Integrated Services Digital Network (ISDN). Refer to *ISDN Primary Rate Interface Features Fundamentals (NN43001-569)* () for a description of all ISDN features.

When CLID is enabled (in LD 17), the calling party's number (if available), is included in the CDR call records. This gives customers information needed to charge back the calling party for services rendered in connection with an incoming or tandem call.

The CLID field format is: xxxxxxxxxxxxxxxx

Where: xxxxxxxxxxxxxxxx = CLID information; x = 0-9

This 16 character field is always output.

If the CLID is less than 16 digits then blank fields are padded with Xs (for example: 1234567XXXXXXXXXX).

### **IANI: In-Band Automatic Number Identification**

In-Band Automatic Number Identification (IANI) displays the ANI number of a call when it terminates on an ACD DN. IANI is supported with the International Supplementary Features (SUPP) package 131 equipped if FCDR is set to NEW in LD 17. For a complete description of the IANI feature, see *Features and Services (NN43001-506)* (). Since In-Band ANI (IANI) and ISDN cannot be configured on the same trunk route, this feature's reports appear in place of the CLID reports. The ANI number is 10 digits long, with XXXXXX filling up the remaining character spaces.

The IANI field format is: xxxxxxxxxxxxxxxx

Where: xxxxxxxxxxxxxxxx = CLID field where 10 digit IANI number is output.

The rest of the field is padded with Xs (for example: 5066337327XXXXXX).

### **FGDANI: Feature Group D Automatic Number Identification**

CDR records of calls in which an incoming Feature Group D (FGD) trunk is involved can include (optionally) an ANI digits field. You must have CDRE package 151 equipped. The option is defined per route in the FGD block (LD 19). The ANI field is supplied in N (Normal) and S (Start) records only, in both TTY and link formats.

An indication exists on the CDR record to recognize that it has an ANI field. The ANI field printout is not dependent on the tenant or CLID fields being printed for the OLD CDR format.

If only II+NPA are received in the call, these are printed in their usual positions and the rest of the ANI field is filled with blank characters. If no ANI information is received for the call, the ANI field is blank.

The Feature Group D Automatic Number Identification (FGDANI) field stores the incoming trunk FGD ANI information. In TTY format, the Feature Group D Automatic Number Identification (FGDANI) field appears in the second line of the CDR report. The second character on the second line of a TTY CDR record is "&". The two information digits (II) are separated from the 10 ANI digits (NPANXXXXXX) by a minus sign "-". A minus sign "-" on position 44 of the second line of an OLD CDR format record is a unique characteristic of a TTY CDR record containing FGD-ANI.

The FGDANI field format is: II-NPANXXxxxx

Where:

II = FGD ANI information digits (00-99)

- = minus character

NPA = Area Code (000-999)

NXX = Exchange Code (000-9999)

xxxx = Exchange Extension number (0000-9999)

If only II+NPA are received in the call, these are printed in their usual positions and the rest of the FGDANI field is filled with blank characters. If no ANI information is received for the call, the ANI field is blank.

### **DNIS: Dialed Number Identification Service**

Dialed Number Identification Service (DNIS) is a number that the system uses to route the call to a person or automated service with information about a specific product line (for example, in a telemarketing environment). DNIS is supported with the International Supplementary Features (SUPP) package 131 equipped if FCDR = NEW in LD 17.

DNIS is included in the CDR record after FGD digits only if:

- the customer has the DNIS and CDR packages
- the route is a DNIS route
- the DNIS option is turned ON in the Route Data Block

This applies to Incoming DID Digit Conversion (IDC DNIS) routes within the same system.

DNIS supports Network ACD (NACD) and Feature Group D (FGD). If a DNIS trunk call is rerouted to a remote target ACD agent through the NACD and the incoming ISDN trunk's Route Data Block has DNIS-CDR enabled, the DNIS number appears at the end of Normal, Start, and End records. The DNIS number also appears at the end of CDR records for incoming FGD trunks that have enabled the DNIS-CDR option in their Route Data Block.

If the OLD CDR Format is active, the DNIS field format is: xxxx

Where: xxxx = DNIS information (0000-9999)-maximum four digits. If less digits are received, the rest of the field is filled with Xs.

If the NEW CDR Format is active, the DNIS field format is: xxxxxxx

Where: xxxxxxx = DNIS information (0000000-9999999)-maximum seven digits. If fewer digits are received, the rest of the field is filled with X characters.

**TTA: Time to Answer (TTY only)**

The Time to Answer feature outputs CDR information indicating the length of time taken to answer any given call. Time to Answer requires that FCDR = NEW in LD 17. The information is:

- length of time the call was in the ringing state
- whether the call was redirected; if it was, the type of redirection it encountered is also output
- total waiting time

Time to Answer expands the CDR record to three lines. The third line accommodates three new subfields. The subfields are:

- TTA—total ringing time
- REDIR—redirection indicator
- TWT—total waiting time

The total waiting time also includes the total ringing time. Therefore, to calculate the actual time in queue (Group Hunt or Attendant), the following formula must be used:

$(\text{total waiting time}) - (\text{total ringing time}) = \text{actual time in queue}$

The formats of the new subfields are as follows:

- Total ringing time (TTA) field located on line 3 positions 3 to 7. The TTA subfield format is: MI:SS

Where:

MI = minutes (00-59)  
: = colon character  
SS = seconds (00-59)

- Redirection indicator (REDIR) subfield located on line 3 position 8. The REDIR subfield format is: A

Where:

A = space character — If no redirection occurred  
N—If redirection occurred prior to the terminating phone ringing, e.g. terminating phone has Call Forward All Calls activated  
R—If redirection occurred after terminating phone was rung, for example, call was forwarded by Call Forward No Answer.

- Total waiting time (TWT) subfield located on line 3 positions 9 to 13. The TWT subfield format is: MI:SS

Where:

MI = minutes (00-59)  
: = colon character  
SS = seconds (00-59)

**INPACK: Incoming packet count**

The incoming packet count (INPACK) field is used to identify the number of incoming data packets received by the MPH. It is output on the second line and occupies positions 4 to 13.

The INPACK field format is: xxxxxxxxxxx

Where: xxxxxxxxxxx = INPACK information—x = 0-9 and a maximum of 10 digits are allowed.

**OUTPACK: Outgoing packet count**

The outgoing packet count (OUTPACK) field is used to identify the number of outgoing data packets sent by the MPH. It is output on the second line and occupies positions 15 to 24.

The OUTPACK field format is: xxxxxxxxxxx

Where: xxxxxxxxxxx = OUTPACK information—x = 0-9 and a maximum of 10 digits are allowed.

**BLID: Billing Line Identification (TTY only)**

The Billing Line Identification (BLID) field it is used to identify the billable party when a metered trunk or a non-metered trunk with CDRX set to YES in its Route Data Block has been routed using call modification to another Meridian Customer Defined Network (MCDN) node.

BLID is 16 characters wide and output on line 3 positions 15 to 30 of the NEW CDR format.

The BLID field format is: xxxxxxxxxxxxxxxxxxx

Where: xxxxxxxxxxxxxxxxxxx = BLID information; a maximum of 16 digits are allowed. If fewer digits are received, the rest of the field is filled with X characters.

x = 0-9

If the BLID is less than 16 digits then blank fields are padded with Xs, for example, 1234567XXXXXXXXXX.

**Terminating Carriage Control (TTY only)**

A carriage return option can be implemented to inform a customer-provided computer that a CDR message is complete. With the option activated, an additional carriage return precedes every CDR record. A CDR record then consists of a carriage return, a line or lines of data, and another carriage return, resulting in every other record being a null record. This option is implemented through service change and, when implemented, applies to all CDR TTY ports in the system.

Selection of this option is by response to the TRCR prompt in LD 15.

**Ampersand (TTY only)**

Ampersands (&) are output to indicate the start of the second line in the OLD CDR format, and to indicate the start of lines two and three in the NEW CDR format.

**M911: M911 Call Abandon**

With the Call Abandon feature activated, a 911 caller who aborts a call is not lost. Instead, the call forwards to an ACD queue. When the call is presented to an ACD agent, Automatic Number Identification (ANI) information appears on the agent's phone display and Automatic Location Identification (ALI) appears on the screen update. The call is then tagged in CDR Q and N records as an abandoned call. The call abandon tag appears on line 3 in positions 32-38 as shown in the following example.

**Table 140**  
**Example 8**  
**Call abandon tag**

```
N 038 01 T081001 DN3434 00/06 06:22 00:00:14
05217201XXXXXXXXX
ABANDON
Q 039 01 T081001 TN1840 00/06 06:22 00:00:18
05217201XXXXXXXXX
ABANDON
```


The M911 field format is: xxxxxxxx, where xxxxxxxx = ABANDON or 7 blank spaces.

**000: CDR 100 Hour Call**

The Call Detail Recording 100 Hour Call feature expands the Call Detail Recording (CDR) duration measurement capability to accommodate calls with a duration greater than 99:59:59.

This feature provides a 100 Hour Duration field. This field is automatically displayed on the third line of all current Fixed Format CDR record types that have the duration field even though the call may be less than or greater than 99:59:59. Example [Figure 3 "The CDR format for CDR 100 Hour Call"](#) (page 156) illustrates the CDR format for CDR 100 Hour Call.

**Figure 3**  
**The CDR format for CDR 100 Hour Call**

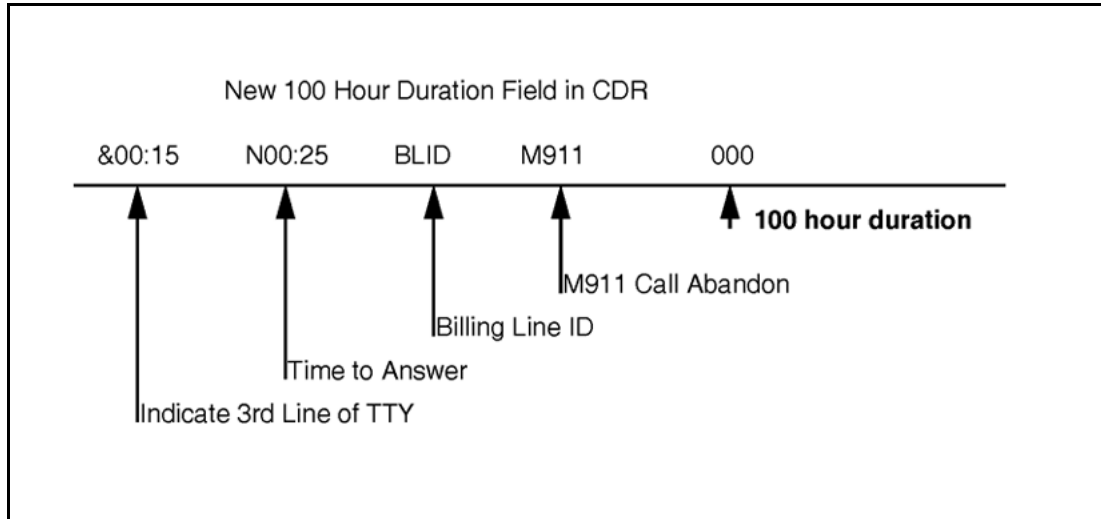

The CDR 100 Hour call field format is: xxx, where xxx = 000 to 999.

### **B: Busy Tone Identifier**

With CDR on Busy Tone, a B record is output when an incoming or internal call is abandoned on busy tone. The CDR on Busy Tone B record information is displayed on the third line of the CDR B record for customers with the New CDR format (FCDR) configured. The third line is also used by the Time to Answer (TTA) feature. A 'B' standing for Busy Tone Condition is printed in the Redirection Identifier subfield. The TTA subfields that usually show the total ringing time and the total waiting time are left blank.

For a simple incoming call, the following CDR B record can be produced:

```
B 001 00 T010004 4001 00/00 00:08:23
& 00 000
& B
```

Note the location of the B field on line 3, position 8.

## Session Initiation Protocol (SIP) Trunk Call

A Converged Desktop (CD) call can be originated from a CS 1000 system, routed by MCS 5100, and terminated back to the CS 1000 system. Coordination with MCS 5100 billing is required.

**Note:** A CD user is a CS 1000 telephone defined in a SIP domain that may have 0 or more terminals in a SIP or other type of network. Any incoming call to its DN is forwarded to its corresponding SIP (or other) terminal. For more information on Converged Desktop Service, see *IP Peer Networking Installation and Commissioning (NN43001-313)* ().

### x-nt-corr-id field

A new field named 'x-nt-corr-id' is introduced in the CDR records generated for a CD user or a SIP trunk call. This field is used for record correlation on the MCS 5100 Accounting Server. The 'x-nt-corr-id' is received or generated at the CS 1000 Call Server for each new call. This information is used for building the CDR Record.

The 'x-nt-corr-id' data is globally unique and is a string with a maximum of 512 characters.

The following is a sample correlation ID string, which is 40 characters long and is in hexadecimal format.

```
0000002F14070F2932@00007544F268-2F0BFF16
```

The format that CS 1000 systems use is fixed and requires the special characters "@" and "-" to be in the appropriate place in the string (that is, "@" as the 19th character and "-" as the 32nd character). The format is as follows:

```
+-----+-----+
| seqnum timestamp |@| Macaddr | - | Ipaddr |
+-----+-----+
| 18 char | 1 | 12 chars in hex | 1 | 8 chars in hex |
+-----+-----+
| Totally 40 chars |
+-----+-----+
```

## CDR TTY

The new record is added to the end of the existing record and occupies a new line (the fourth line). The final output of a CDR record with the x-nt-corr-id is as follows:

```
N 051 00 DN3456 T000045 09/07 11:51:30 00:07:15.0 92126823333
&
&0000002F14070F2932@00007544F268-2F0BFF16
```

The fourth line appears only if CRID = YES (in LD 16) for a particular SIP route.

### CDR Output for Incoming CD Call

CDRs for a CD simulate the CDR outputs in a SIMRING call. However, because the CD call was made by a common pool of PCA agents instead of a designated PCA in the SIMRING case, some variation applies.

The basic rule for the CDR output of an incoming CD call is that the caller of the PCA extended calls shows the DN of the called CD. For example, if A calls B and B is a CD user, three records are returned:

- A to B
- B to VTRK
- B to B, where the last two calls were made by PCA but the caller had been replaced to be B.

The following tables give examples on CDR output given in different call scenarios.

### Incoming call to CDMO, abandoned

[Table 141 "Abandoned CDMO call" \(page 158\)](#) lists the CDRs for an incoming call to CD (DN 3210) if the caller abandons the call.

**Table 141**  
**Abandoned CDMO call**

Status	CDRs	Description
CD is ringing.	N075013210 T10101010/2015:12:4900:00:00.0A 1015100 & 000 000 & 000 &000000C3140A0F0C30@0000754588D0-2F0BD9FF	PCA extended. SIP trunk call is released.
CD is idle after the caller abandons the call.	B 076 01 3200 3210 10/20 15:12:50 & 000 000 & 00:02 B 077 01 3210 3210 10/20 15:12:50 & 000 000 & 00:01	The call between the CD and the caller is abandoned.  Abandon record from ringback PCA to CD.

### Incoming call to CDMO, answered at CD

[Table 142 "Answered CDMO call" \(page 159\)](#) lists the CDRs for an incoming call to CD (DN 3210) answered at CD.

**Table 142**  
**Answered CDMO call**

Status	CDRs	Description
CD is ringing.	N078013210 T10101010/2015:12:5800:00:02.0A 1015100 & 000 000 & 000 &000000C4140A0F0D01@0000754588D0-2F0BD9FF	PCA extended. SIP trunk call is released.
CD is idle after the caller abandons the call.	B 070 01 3210 3200 10/20 15:12:19& & 000 000 & 00:04 B 071 01 3200 3200 10/20 15:12:19 & 000 000 & 00:04	Call is abandoned.  Abandon record from ringback PCA to CD.

**Incoming call to CDMV, abandoned**

[Table 143 "Abandoned CDMV call" \(page 159\)](#) lists the CDRs for an incoming call to CD (DN 3200) if the caller abandons the call.

**Table 143**  
**Abandoned CDMV call**

Status	CDRs	Description
CD is ringing.	N069013200 T10101010/2015:12:1500:00:00.0A 1015100 & 000 000 & 000 &000000C4140A0F0D01@0000754588D0-2F0BD9FF	PCA extended. SIP trunk call is released.
CD is idle after the caller abandons the call.  Call is ended.	B 070 01 3210 3200 10/20 15:12:19 & 000 000 & 00:04 B 071 01 3200 3200 10/20 15:12:19 & 000 000 & 00:04	Call is abandoned.  Abandon record from ringback PCA to CD.

**Incoming call to CDMV, answered**

[Table 144 "Trunk answered CDMV call" \(page 160\)](#) lists the CDRs for an incoming call to CD (DN 3200) if the trunk answers the call.

**Table 144**  
**Trunk answered CDMV call**

Status	CDRs	Description
Call forked by MCS 5100 and answered over SIP trunk.	S072013200 T10101010/2015:12:3500:00:00.0A 1015100 & 000 000 & 000 &000000C2140A0F0C22@0000754588D0-2F0BD9FF	PCA is extended. SIP trunk call is answered.
Call to CD is dropped.	B 073 01 3200 3200 10/20 15:12:36 00:00:00.0 & 000 000 & 00:01 000	Call to CD is dropped.
Call is ended	E 074 01 3210 T10101010 10/20 15:12:37 00:00:00.0 65100 & 000 000 & 00:02 000	The call is released between the caller and trunk.

**Incoming call to CDMV, answered**

Table 145 "Trunk answered CDMV call" (page 160) lists the CDRs for an incoming call to CD (DN 3200) if the CD answers the call.

**Table 145**  
**Trunk answered CDMV call**

Status	CDRs	Description
Call is forked by MCS 5100 and answered by CD.	N072013200 T10101010/2015:12:3500:00:00.0A 1015100 & 000 000 & 000 &000000C2140A0F0C22@0000754588D0-2F0BD9FF	PCA is extended. SIP trunk call is answered.
CD establishes the call.	L 073 01 3200 3200 10/20 15:12:36 00:00:00.0 & 000 000 & 00:01 000	CD answers the call and the call is merged.
Call is ended.	L 074 01 3210 3200 10/20 15:12:37 00:00:00.0 & 000 & 00:02 000	The call is released between the caller and CD.

# Teletype call record output

---

## Contents

This section contains information on the following topics:

[“Introduction” \(page 161\)](#)

[“Record output and storage” \(page 161\)](#)

[“More about TTY output” \(page 162\)](#)

[“Reversed Wired CO trunk” \(page 162\)](#)

[“Old and New Format CDR” \(page 162\)](#)

## Introduction

Each call record is output on a Teletype (TTY) as one, two, or three lines. The records are broken into fields, the significance of which is determined by their position in a line. Fields are separated by one or more blank characters. The unused fields in a given record are left blank.

## Record output and storage

Records generated by CDR can be output to any device with an EIA RS-232 compatible interface. An example is records output to a printer for hard copy reports. Records may also be stored on tape for later downstream processing.

Screen or printer output uses the standard ASCII character set. A CDR record takes up one or more lines on a printed page, depending on the release of software and software packages and features enabled.

CDR data may contain the ASCII NUL character that appears randomly interspersed among the CDR characters. The NUL character is a control character that means "Do nothing". It does not appear on the printed output, and holds no significance to the CDR record. It may be deleted from the data stream without affecting the content of the record. When

analyzing it as part of the data flow, view the NUL character as occupying zero character positions, so it does not affect beginning and ending positions for any field in the record.

The Serial Data Interface (SDI) cable between the switch and the CDR cabinet can be up to 15.24 m (50 ft.) long. Beyond this distance, modems are required.

## More about TTY output

The output format is dependent on the software release and features enabled. [Figure 4 "Sample OLD CDR format TTY records" \(page 165\)](#) shows samples of OLD CDR format TTY records, while the output field locations are given in the following tables:

- [Table 146 "OLD CDR format TTY output field locations" \(page 165\)](#) OLD CDR format TTY output field locations
- [Table 147 "NEW CDR format TTY output field locations" \(page 169\)](#) NEW CDR format TTY output field locations
- [Table 148 "G and H records TTY output field locations" \(page 173\)](#) G and H records TTY output field locations

## Reversed Wired CO trunk

CDR records will be affected by miswiring the NT8D14 universal trunk card. Calls will not be released, and reports can indicate abandoned calls, or origination times that are not accurate. Be sure to check any trunk flagged as reverse-wired to ensure accurate CDR reports. For a complete description, see *Circuit Card Reference (NN43001-311)* ().

## Old and New Format CDR

The Format CDR package allows administrators to configure a new CDR format by entering "NEW" at the FCDR prompt in LD 17.

With the OLD CDR format, the packages equipped determine the number of lines to appear in call record output. For example, if Multi-Tenant Service (TENS), Periodic Pulse Metering (PPM), Advice of Charge (AOC), Calling Line Identification (CLID), Feature Group D Automatic Number Identification (FGD ANI) or Dialed Number Identification Service (DNIS) features are enabled with the OLD CDR format, then CDR records are two lines. If none of these packages or features are equipped, OLD CDR format records are one line.

With the new Format CDR (FCDR = NEW), CDR records are two lines if the Time to Answer (TTA) feature is not activated for the customer, or three lines, if the TTA feature is activated for the customer.

With the OLD CDR format, the field location is dependent on which packages are equipped. An example is the TIMESTAMP field. If Internal CDR is equipped, the TIMESTAMP field is line 1 positions 50 to 60 for L records and line 1 positions 38 to 48 for all other records.

With New Format CDR, the fields are given fixed locations and all information is left justified. For example, the TIMESTAMP field is fixed at line 1 positions 26 to 39 for all record types.

Screen or printer output uses the standard ASCII character set. Data may contain the ASCII NUL character randomly interspersed among the CDR characters. The NUL character is a control character that means "Do nothing" and does not appear on the printed output. It may be deleted without affecting the record, and it does not affect beginning and ending positions for any field in the record.

**Note 1:** Digits prefixed with "A" identify an RS/ANI route selection; those prefixed with an "E" identify a NARS, BARS, or CDP all. "E" indicates an expensive route was used. Digits prefixed with "C" indicate that the digits stored are MFC CNI digits for an incoming call.

**Note 2:** The Originating and Terminating ID's can be:

Trrrrmm Trunk route and member number

Arrrrmm Answered answer supervised Trunk route and member number

DNxxxx Directory Number

ATTNxx Attendant number

CFlllnn loop and conference number.

**Note 3:** Terminating ID for Connection records is TNxxxx, where xxxx is the card/units (packed format) of the agent station. The terminating ID for answered calls on supervised trunks is:

Arrrrmm Answered answer supervised Trunk route and member number

**Note 4:** The Auxiliary ID identifies the Terminal Number of the originating station when the station has a multiple appearance prime DN. The format is Ill.s.cc.uu, where: Ill = loop, ss = shelf, c = card, and uu = unit.

**Note 5:** When Multi-Tenant Service is equipped, the Tenant Numbers of the originating and terminating parties are printed on a second line, below the OrigID and TerID fields, as shown below:

---

```
N 001 00 DN4999 A000009 7.1.02.1 06/28 10:15 00:00:20 9828124
006 102
```

---

**Note 6:** When Calling Line Identification (CLID) is equipped, the CLID is printed on a second line, below the record number, as shown below:

---

N 002 00 DN4999 DN5064 7.1.02.1 06/28 10:22 00:00:12 9828124  
95551111XXXXXXXXXX

---

**Note 7:** When Calling Line Identification (CLID) is equipped, along with CDRE package 151, the CLID is printed on a second line, below the record number, as shown below:

---

N 002 00 DN4999 DN5064 7.1.02.1 06/28 10:22 00:00:12 9828124  
& 95551111XXXXXXXXXX

---

**Note 8:** When Calling Line Identification (CLID) and Multi-Tenant Service are both equipped, they are printed as shown below:

---

N 003 00 DN4999 DN5064 7.1.02.1 06/28 10:26 00:00:08 9828124  
006 102 95551111XXXXXXXXXX

---

**Note:** When Calling Line Identification (CLID) and Multi-Tenant Service are both equipped, they are printed as shown below:

---

N 003 00 DN4999 DN5064 7.1.02.1 06/28 10:26 00:00:08 9828124  
&006 102 95551111XXXXXXXXXX

---

(only generated with CDRE package is equipped with FGD)

---

**Note:** When In-Band ANI (IANI) is operating, the ANI number will be generated in the same field as the CLID feature. It appears on the second line, below the record number, in the format shown below:

---

N 002 00 DN4999 DN5064 7.1.02.1 06/28 10:22 00:00:12 9828124  
123456789XXXXXXXXX

---

**Note:** PPM or AOC and appropriate CDR options equipped to obtain these fields. (xxxxx = Total Pulse Count; yyyyyy = Call Charge/Meter Overflow). The Pulse Count, Call Charge and Meter Overflow fields only appear for Start, Normal, Transfer and End Records.

---

**Figure 4**  
**Sample OLD CDR format TTY records**

N 001	00	DN4999	A00009	7.1.02.1	06/28	10:15	00:00:20	98289124
		042	019	xxxxx yyyyyy				
N 002	00	T00004	DN5064		06/28	10:15	00:00:12	
S 003	00	T00004	DN5064		06/28	10:15		
N 004	00	DN4999	T00004	7.1.02.1	06/28	10:15	00:00:22	98289124
E 005	00	T00004	DN5055		06/28	10:16		
N 006	00	DN4999	T00004	7.1.02.1	06/28	10:15	00:00:20	98289124
N 007	00	DN4999	T00004	7.1.02.1	06/28	10:15	00:00:20	98289124
T					06/28	10:16		
T					06/28	10:17		
T					06/28	10:18		
N 008	00	ATTN02	A00003	7.1.02.1	06/28	10:20	00:00:07	950260411
S 009	00	DN5555	A00001		06/28	10:22	00:00:17	A 98291112
E 010	00	CF0615	A00001	7.1.02.1	06/28	10:22		

↑ Record Type  
 ↑ Note 8  
 ↑ Record Number (modulo 128)  
 ↑ Customer Number  
 ↑ Originating I.D. (Note 2)  
 ↑ Terminating I.D. (Note 2, 3)  
 ↑ Auxiliary I.D. — ll.s.cc.u (Note 4)  
 ↑ Date  
 ↑ Time  
 ↑ Call Duration  
 ↑ Digits, Dialed or Outpulsed (Note 1)

01157F

Table 146 "OLD CDR format TTY output field locations" (page 165) lists OLD CDR format TTY output field locations.

**Table 146**  
**OLD CDR format TTY output field locations**

Line	Position	Field	Field Format	Field Definition
<b>Fields common to all records:</b>				
1	1	RECTYPE	Y	Record Type

**Table 146**  
**OLD CDR format TTY output field locations (cont'd.)**

Line	Position	Field	Field Format	Field Definition
	2	<blank>		Blank space
<b>Format used by I and T records:</b>				
1	3-25	<blank>		Blank spaces
1	26-36	TIMESTAMP	MO/DD_HH:MI	Time stamp
<b>Fields common to A, C, E, F, L, M, N, P, Q, R, S, and X records:</b>				
1	3-5	RECNO	XXX	Record Sequence Number
1	6	<blank>		Blank space
1	7-8	CUSTNO	XX	Customer Number
1	9	<blank>		Blank space
1	10-16	ORIGID		Originating Identification:
			TRRRMMM	Trunk
			ARRRMMM	Answered Answer Supervision Trunk
			DNXXXXX	Directory Number (see <b>Note</b> )
			ATTNXX	Attendant Number
			CFLLLNN	Conference Number
<b>Note:</b> If the system is equipped with the CDRE package, the format for the DN (or ACD Position ID) in the ORIGID or TERID field is XXXXXXXX to accommodate up to 7 digits.				
1	17	<blank>		Blank space
1	18-24	TERID	same as ORIGID	Terminating Identification
1	25	<blank>		Blank space
1	26-36	AUXID	LLL.S.CC.UU	Originating Auxiliary Identification for L records, Auxiliary Identification for all other records
1	37	<blank>		Blank space
<b>Fields common to A, C, E, F, M, N, P, Q, R, S, and X records:</b>				
1	38-48	TIMESTAMP	MO/DD_HH:MI	Time stamp
1	49	<blank>		Blank space
<b>Fields common to E, F, N, Q, R, and S records:</b>				
1	50-57	DURATION	HH:MI:SS	Duration
1	58	<blank>		Blank space
<b>Field common to F, N, Q, R, and S records:</b>				
1	59-90	DIGITS	XXX...X	Digits dialed: Up to 32 digits

**Table 146**  
**OLD CDR format TTY output field locations (cont'd.)**

Line	Position	Field	Field Format	Field Definition
	<b>or</b>			
1	59-92	DIGITS	A XXX...X	Route Selection was used + up to 32 digits
			C XXX...X	MFC Calling Number Identification + up to 32 digits
			E XXX...X	BARS/NARS call placed over expensive route + up to 32 digits
<b>Field common to A, C, M, and P records:</b>				
1	50-72	DIGITS	XXX...X	Digits dialed 14 Authorization code, or 23 Charge Account, or 23 Calling Party Number
<b>Format for L records:</b>				
1	38-48	TERMAUXI D	LLL.S.CC.UU	Terminating Auxiliary Identification
1	49	<blank>		Blank space
1	50-60	TIMESTAM P	MO/DD_HH:MI	Time stamp
1	61	<blank>		Blank space
1	62-69	DURATION	HH:MI:SS	Duration
1	70	<blank>		Blank space
1	71-73	ORIGTEN0	XXX	Originating Tenant Number
1	74	<blank>		Blank space
1	75-77	TERTEN0	XXX	Terminating Tenant Number
<b>Format used for CLID only:</b>				
2	1-2	<blank>		Blank spaces
2	3-18	CLID	XXX...X	Calling Line Identification is always 16 characters, for example: 1234567XXXXXXXXXX
<b>Format used for CLID and Tenant:</b>				
2	1-9	<blank>		Blank spaces
2	10-12	ORIGTEN0	XXX	Originating Tenant Number
2	13-17	<blank>		Blank spaces
2	18-20	TERTEN0	XXX	Terminating Tenant Number

**Table 146**  
**OLD CDR format TTY output field locations (cont'd.)**

Line	Position	Field	Field Format	Field Definition
2	21-24	<blank>		Blank spaces
2	25-40	CLID	XXX...X	Calling Line Identification is always 16 characters. For example: 1234567XXXXXXXXXX
<b>Format used for PPM/AOC only:</b>				
2	1-9	<blank>		Blank spaces
2	10-14	CHGINFO	XXXXX	Charge Information
2	15	<blank>		Blank space
2	16-21	CALLCHG	XXXXXX	Calculated Call Charge/Meter Overflow
<b>Format used for PPM/AOC and CLID:</b>				
2	1-9	<blank>		Blank spaces
2	10-14	CHGINFO	XXXXX	Charge Information
2	15	<blank>		Blank space
2	16-21	CALLCHG	XXXXXX	Calculated Call Charge/Meter Overflow
2	22-24	<blank>		Blank spaces
2	25-40	CLID	XXX...X	Calling Line Identification is always 16 characters, for example: 1234567XXXXXXXXXX
<b>Format used for PPM/AOC and Tenant:</b>				
2	1-9	<blank>		Blank spaces
2	10-12	ORIGTEN0	XXX	Originating Tenant Number
2	13-17	<blank>		Blank spaces
2	18-20	TERTEN0	XXX	Terminating Tenant Number
2	21-25	<blank>		Blank spaces
2	26-30	CHGINFO	XXXXX	Charge Information
2	31	<blank>		Blank space
2	32-37	CALLCHG	XXXXXX	Calculated Call Charge/Meter Overflow
<b>Format used for PPM/AOC and Tenant and CLID:</b>				
2	1-9	<blank>		Blank spaces
2	10-12	ORIGTEN0	XXX	Originating Tenant Number
2	13-17	<blank>		Blank spaces

**Table 146**  
**OLD CDR format TTY output field locations (cont'd.)**

Line	Position	Field	Field Format	Field Definition
2	18-20	TERTEN0	XXX	Terminating Tenant Number
2	21-25	<blank>		Blank spaces
2	26-30	CHGINFO	XXXXXX	Charge Information
2	31	<blank>		Blank space
2	32-37	CALLCHG	XXXXXX	Calculated Call Charge/Meter Overflow
2	38-40	<blank>		Blank spaces
2	41-56	CLID	XXX...X	Calling Line Identification is always 16 characters, for example: 1234567XXXXXXXXXX
<b>Format used for CDRE only:</b>				
2	1	<blank>		Blank space
2	2	CDRE	&	Ampersand
<b>Format used for FGD and DNIS:</b>				
2	1	<blank>		Blank space
2	2	CDRE	&	Ampersand
2	3-41	<blank>		Blank space
2	42-54	FGDANI	XX-NPANXXXXXX	Feature Group D ANI
2	55	<blank>		Blank space
2	56-59	DNIS	XXXX	DNIS number

Table 147 "NEW CDR format TTY output field locations" (page 169) lists NEW CDR format TTY output field locations.

**Table 147**  
**NEW CDR format TTY output field locations**

Line	Position	Field	Field Format	Field Definition
1	1	RECTYPE	Y	Record Type
1	2	<blank>		Blank space
1	3-5	RECNO	XXX	Record Sequence Number
1	6	<blank>		Blank space
1	7-8	CUSTNO	XX	Customer Number
1	9	<blank>		Blank space
1	10-16	ORIGID		Originating Identification:

**Table 147**  
**NEW CDR format TTY output field locations (cont'd.)**

Line	Position	Field	Field Format	Field Definition
			TRRRMMM	Trunk
			ARRRRMM	Answered Answer Supervision Trunk
			DNXXXX	Directory Number (see <b>Note</b> )
			ATTNXX	Attendant Number
			CFLLLNN	Conference Number
<b>Note:</b> If the system is equipped with the CDRE package, the format for the DN (or ACD Position ID) in the ORIGID or TERID field is XXXXXXXX to accommodate up to 7 digits. For internal calls (RECTYPE L), if the CDRE package is not equipped, the TERID field occupies locations 18-23, and all succeeding fields are printed one character further to the left than shown below.				
1	17	<blank>		Blank space
1	18-24	TERID	same as ORIGID	Terminating Identification
1	25	<blank>		Blank space
1	26-39	TIMESTAMP	MO/DD_HH:MI:SS	Time stamp
1	40	<blank>		Blank space
1	41-50	DURATION	HH:MI:SS.S	Duration
1	51	<blank>		Blank space
1	52	DIGITTYPE	E, A, C, or blank	Digit type identifier  A = BARS/NARS routing C = MFC CNI digits E = BARS/NARS routing over expensive route
1	53-84	DIGITS	XXX...X	Digits dialed
1	85-86	<blank>		Blank spaces
1	87	<blank>		
1	88	<cr>		
1	89	<lf>		
2	1	<blank>		Blank space
2	2	&	&	new line indicator
2	3-18	CLID	XXX...X	Calling Line Identification is always 16 characters, for example: 1234567XXXXXXXXXX

**Table 147**  
**NEW CDR format TTY output field locations (cont'd.)**

Line	Position	Field	Field Format	Field Definition
2	19	<blank>		Blank space
2	20-24	CHGINFO	XXXXXX	Charge Information
2	25	<blank>		Blank space
2	26-31	CALLCHG	XXXXXX	Calculated Call Charge/Meter Overflow
2	32	<blank>		Blank space
2	33-45	FGDANI	XX-NPANXXXXXX	Feature Group D ANI
2	46	<blank>		Blank space
2	47-53	DNIS	XXXXXXXX	DNIS number (Release 20 and later)
2	54	<blank>		Blank space
2	55-65	ORIGAUXID	LLL.S.CC.UU	Originating Auxiliary Identification
2	66	<blank>		Blank space
2	67-77	TERMAUXID	LLL.S.CC.UU	Terminating Auxiliary Identification
2	78	<blank>		Blank space
2	79-81	ORIGTEN0	XXX	Originating Tenant Number
2	82	<blank>		Blank space
2	83-85	TERMTEN0	XXX	Terminating Tenant Number
2	86	<blank>		
2	87	<cr>		
2	88	<lf>		
3	1	<blank>		Blank space
3	2	&	&	new line indicator
3	3-7	TTA or <blank>	MI:SS	Time to Answer (total ringing time)  or  <blank> if CDR on Busy Tone feature applies

**Table 147**  
**NEW CDR format TTY output field locations (cont'd.)**

Line	Position	Field	Field Format	Field Definition
3	8	REDIR or B	Y or B	Time to Answer (redirection indicator)  Busy Tone identifier
3	9-13	TWT or <blank>	MI:SS	Time to Answer (total wait time)  <blank> if CDR on Busy Tone feature applies
3	14	<blank>		Blank space
3	15-30	BLID	XXXXXXXXXXXXXXX XXX	Billing Line I.D.  BLID applies only for network multiple call transfers on PPM and non-PPM outgoing CO trunks.
3	31	<blank>		Blank space
3	32-38	ABANDON	ABANDON	Tags the call as abandoned (911 only)
3	39	<blank>		
3	40-42		000	100-Hour Duration
3	43	<blank>		
3	44-45	NPI	XX	CLID Numbering Plan Identification
3	46	<blank>		
3	47	TON	X	CLID Type of Number
3	48	<blank>		
3	49-50	BCAP	XX	Bearer Capability
3	51	<blank>		
3	52-67	ORIG MIN	XXX...X	Originating Portable's Mobile Identification Number (used to track mobility IS-41 calls for billing purposes).
3	68	<blank>		

**Table 147**  
**NEW CDR format TTY output field locations (cont'd.)**

Line	Position	Field	Field Format	Field Definition
3	69-84	TERM MIN	XXX...X	Terminating Portable's Mobile Identification Number (used to track mobility IS-41 calls for billing purposes).
3				If TRCR is set it will end in <cr> <lf>

For the NEW CDR format, all fields are always output. If the field is blank it is output as spaces.

**Table 148**  
**G and H records TTY output field locations**

Line	Position	Name	Format	Definition
1	1	RECTYPE	Y	Record Type
1	2	<blank>		Blank space
1	3-5	RECNO	XXX	Record Sequence Number
1	6	<blank>		Blank space
1	7-8	CUSTNO	XX	Customer Number
1	9	<blank>		Blank space
1	10-23	ORIGID	XXXXXXXXXXXXXXXX	Originating Identification: Data Network Address or TN
1	24	<blank>		Blank space
1	25-38	TERID	same as ORIGID	Terminating Identification
1	39	<blank>		Blank space
1	40-50	TIMESTAMP	MO/DD_HH:MI	Time stamp
1	51	<blank>		Blank space
1	52-59	DURATION	HH:MI:SS	Duration
2	1	<blank>		Blank space
2	2	&	&	new line indicator
2	3	<blank>		
2	4-13	INPACK	XXXXXXXXXX	Incoming packet count
2	14	<blank>		
2	15-24	OUTPACK	XXXXXXXXXX	Outgoing packet count



---

# Call record types

---

## Contents

This section contains information on the following topics:

[“Introduction” \(page 176\)](#)

[“B record \(Abandoned call\)” \(page 177\)](#)

[“N \(Normal\) record” \(page 177\)](#)

[“S \(Start\) record” \(page 180\)](#)

[“X record \(Transfer\)” \(page 183\)](#)

[“E record \(End\)” \(page 184\)](#)

[“I record \(Initialization\)” \(page 185\)](#)

[“T record \(Time stamp\)” \(page 185\)](#)

[“A record \(Authorization Code/Scheduled Access Restriction\)” \(page 185\)](#)

[“C record \(Charge Account\)” \(page 186\)](#)

[“M record \(Charge Conference\)” \(page 188\)](#)

[“P record \(Calling Party Number\)” \(page 188\)](#)

[“F, R, and Q records \(ACD call connections\)” \(page 189\)](#)

[“L record \(Internal CDR\)” \(page 190\)](#)

[“G record \(Internal Meridian 1 Packet Handler data call\)” \(page 192\)](#)

[“H record \(External Meridian 1 Packet Handler data call\)” \(page 192\)](#)

[“D record \(Station Activity\)” \(page 192\)](#)

[“Y record \(Public Network Feature Invocation\)” \(page 193\)](#)

[“Priority Connection Record” \(page 196\)](#)

[“CDR record sequencing” \(page 197\)](#)

## Introduction

All calls generate, at a minimum, single call records. Unmodified calls generate a Normal record. Modified calls generate Start, Transfer, and End records. Multiple call records can be generated for calls which are impacted by certain features.

[Table 149 "Call record types" \(page 176\)](#) presents a comprehensive list of call record types and the page on which they are described in detail. Each record type is described as it relates to packages, features and call scenarios. Record fields are discussed in the next section, starting on [“Call record fields” \(page 135\)](#).

After each record type is described, Priority connection records and CDR record sequencing are discussed.

**Table 149**  
**Call record types**

Record	Description
A	<a href="#">“A record (Authorization Code/Scheduled Access Restriction)” (page 185)</a>
B	<a href="#">“Abandoned Call” (page 220)</a>
C	<a href="#">“C record (Charge Account)” (page 186)</a>
D	<a href="#">“D record (Station Activity)” (page 192)</a>
E	<a href="#">“E record (End)” (page 184)</a>
F	<a href="#">“F, R, and Q records (ACD call connections)” (page 189)</a>
G	<a href="#">“G record (Internal Meridian 1 Packet Handler data call)” (page 192)</a>
H	<a href="#">“H record (External Meridian 1 Packet Handler data call)” (page 192)</a>
I	<a href="#">“I record (Initialization)” (page 185)</a>
L	<a href="#">“L record (Internal CDR)” (page 190)</a>
M	<a href="#">“M record (Charge Conference)” (page 188)</a>
N	<a href="#">“Feature packaging” (page 24)</a>
P	<a href="#">“P record (Calling Party Number)” (page 188)</a>
Q	<a href="#">“F, R, and Q records (ACD call connections)” (page 189)</a>
R	<a href="#">“F, R, and Q records (ACD call connections)” (page 189)</a>
S	<a href="#">“S (Start) record” (page 180)</a>

**Table 149**  
**Call record types (cont'd.)**

Record	Description
T	"Half Second duration accuracy" (page 71)
X	"X record (Transfer)" (page 183)
Y	"Y record (Public Network Feature Invocation)" (page 193)

## B record (Abandoned call)

B records (Abandoned call) are output when the Time to Answer feature is active and New Format CDR is selected for CDR TTY output (FCDR = NEW in LD 17). B records are only output to CDR Teletype devices.

B records are output when:

- an unanswered incoming trunk disconnects and ABAN = YES in LD 16
- Internal CDR is equipped and an unanswered internal station disconnects from another internal station which has ABDA class of service

With the CDR on Busy Tone feature, a B record is produced when the originator of an incoming or internal call disconnects after receiving a busy tone. The CDR on Busy Tone B record information is displayed on the third line of the CDR B record when the New CDR format (FCDR) is configured.

## N (Normal) record

An N record (Normal record) is generated when a simple call is established, whether or not it is extended through the Attendant Console, and when no other phone feature is activated.

For a Normal record, all phone dialpad input is included in the CDR record until such time as the End-of-Dialing (EOD) timer interval is exceeded or the user enters # from the phone dialpad. Thus, the dialed DN portion of the CDR record may include \* symbols and unused digits. For example, speed call and autodial numbers often include \* symbols. Each \* symbol causes a software defined pause to occur when the symbol is interpreted by the system.

End-to-End Signaling (EES) digits are dialed after the timer expires, after the octothorpe (#) has been pressed, or after Answer Supervision is received. EES digits often include sensitive information such as authorization codes and account numbers. These digits appear in the CDR only if the customer chooses to include them. Administrators choose to include these digits in CDR by setting ECDR to YES in the Customer Data Block (LD 15). The default is NO.

A user can enter additional digits prior to the system receiving an EOD timeout or user-initiated # entry. In such cases, the call is completed to the correct destination but the CDR record contains the extra digits.

## **Feature interactions/Call scenarios**

### **Route selection features**

When one of the Route Selection features is used, the letter A precedes the DIGITS field on TTY outputs. These features are Basic Alternate Route Selection (BARS), Network Alternate Route Selection (NARS), Route Selection-Automatic Number Identification (RS-ANI) and Coordinated Dialing Plan (CDP). With the BARS and NARS features, the letter E precedes the TTY DIGITS field to indicate the call was completed over facilities that are designated (through service change) as expensive.

### **Incoming Calls**

An incoming call answered by the attendant and extended to a station generates a Normal record, indicating the trunk as the ORIGID and the station as the TERID. No indication is given that the attendant is involved in the call.

A B record is output if the Abandoned Calls feature is active. However, when the call is abandoned during recall, the Attendant Console is shown as the TERID under all circumstances. Incoming calls answered by the attendant but not extended to a station are shown as terminating at the Attendant Console.

**TIE trunk operation** If an incoming TIE trunk is connected to a metered trunk, all charges are assigned to the TIE route access code meter.

### **Outgoing calls**

When the attendant extends an outgoing call to a station, the Normal record shows the trunk as ORIGID and the station as TERID. The DIGITS field includes the station number dialed by the attendant.

Outgoing calls on trunks with Answer Supervision only generate a record if an answer is received. Billing begins at the time of answer.

CHGINFO and CALLCHG fields are output in the second line if Message Registration (MR) package 101 is equipped and either the Periodic Pulse Metering (PPM) or Advice of Charge (AOC) feature is activated. These fields are output for all outgoing calls on metered Public Switched Telephone Network (PSTN) and Direct Outward Dial (DOD) trunk connections.

**Ring Again** When the Ring Again feature is activated, a record is generated only when a trunk is seized.

**TIE trunk operation** The duration of calls placed over tandem, unsupervised TIE trunks is calculated from the time the trunk is seized. The duration of calls placed over tandem, supervised TIE trunks is calculated from the time the trunk is answered. For supervised trunks an N (Normal) or S (Start) record is generated only if Answer Supervision is received. Thus, the calling party is not charged for the time taken for outpulsing and ringing.

### **Tandem calls**

In a scenario where a PPM trunk enters a network at one node and terminates on another network node without terminating on the first node, an N (Normal) record is output at the first node if both of the following conditions are met:

- The CDR Transfer Enhancement (CDRX) package 259 is equipped
- The response to the CDRX prompt is "YES" in LD 16 for both incoming and outgoing trunks

The N record in the above scenario includes the BLID (Billing Line I.D.) field.

### **Call Forward**

When Call Forward is activated and results in a trunk-to-trunk (tandem) call or an incoming TIE-to-outgoing-TIE call, two N (Normal) records are generated. More than two N records can be generated if Trunk Route Optimization is activated.

The first N record shows the incoming trunk as ORIGID and the call forwarded DN as TERID. The second N record shows the call forwarded DN as ORIGID and the outgoing trunk as TERID. Both N records show the same time stamp and duration data.

An E (End) record is generated at the end of the call.

With PPM or AOC activated, charge information is assigned to the forwarding party when an internal call is forwarded over a metered trunk. Charge information appears in the form of PPM pulses or ISDN Information Elements.

**One-step Call Forward** In the case where the call is forwarded directly from the phone (Phone A) to a trunk or an outgoing TIE, the LAST prompt in LD 16 has no effect. The first Normal record is generated for the incoming part of the call:

ORIGID = incoming TIE/trunk, TERID = Phone A

The second Normal record is generated for the outgoing part of the call:

ORIGID = Phone A, TERID = outgoing TIE/trunk, digits = outpulsed digits

**Two-step Call Forward** In the case where the call is forwarded to another phone (from Phone A to Phone B), and then reforwarded to the trunk or outgoing TIE, the LAST prompt in LD 16 affects the second Normal record. The first Normal record is generated for the incoming part of the call:

ORIGID = incoming TIE/trunk, TERID = Phone A

If LAST = YES in LD 16, the second Normal record is generated as:

ORIGID = Phone B, TERID = outgoing TIE/trunk, digits = outpulsed digits

If LAST = NO in LD 16, the second Normal record is generated as:

ORIGID = Phone A, TERID = outgoing TIE/trunk, digits= outpulsed digits

**Multistep call forward** If the case where the call is forwarded through a series of phones (for example, from Phone A to Phone B to Phone C), and then reforwarded to the trunk or outgoing TIE, the LAST prompt in LD 16 affects the second Normal record. The first Normal record is generated for the incoming part of the call:

ORIGID = incoming TIE/trunk, TERID = Phone A

If LAST = YES in LD 16, the second Normal record is generated as:

ORIGID = Phone C, TERID = outgoing TIE/trunk, digits= outpulsed digits

If LAST = NO in LD 16, the second Normal record is generated as:

ORIGID = Phone B, TERID = outgoing TIE/trunk, digits = outpulsed digits

## S (Start) record

A call that is modified by certain features generates an S (Start) record. For example, an S record is generated when a call is transferred or conferenced.

The point in time at which the S (Start) record is generated is determined as follows. If the trunk is Periodic Pulse Metered, an S record is generated when the called DN answers and the transferring DN releases. If the trunk is not Periodic Pulse Metered, the S record is generated when the transferring DN releases, regardless of whether or not the called DN answers.

An S record is always generated for an attendant-extended outgoing-trunk call. The system also outputs S records for calls which are transferred to other Meridian Customer Defined Network (MCDN) stations, if the system is equipped with the CDRX package 259 and the response to the CDRX prompt is "YES" in LD 16.

When transferred across the network, the billable party is identified in the BLID field of the record.

## **Feature interactions/Call scenarios**

### **Call Transfer**

When Call Transfer is activated on an established call, an S record is generated instead of an N (Normal) record. The S record is generated when the transfer is complete. The S record indicates which two parties are involved immediately before the feature was activated. The TERID records the transferring DN. On call termination, an E (End) record is generated showing its final disposition. The End record shows the trunk as ORIGID and the DN as TERID.

X records are output if the metered trunk is transferred over an ISDN link to another node in a Meridian Customer Defined Network (MCDN). The E (End) record shows the DN as ORIGID and the trunk as TERID. The billable party is identified by the BLID field in the third line of S, X, and E records.

If the CDRX package 259 is equipped and CDRX = YES in LD 16, then S, X, and E records are output for both internal and external (to another node in a MCDN) call transfers.

When a call is transferred outside the system (external transfer) and not to another MCDN node, a second S record is generated. For the second S record, ORIGID indicates the transferring DN, TERID indicates the outgoing trunk, and DIGITS indicates the number to which the call is transferred. An E (End) record is generated at the end of the call.

### **Call Forward**

A forwarded call that results in a trunk-to-trunk (tandem) call generates a consecutive pair of S records. The first record indicates the incoming trunk as ORIGID and the call forwarded DN as TERID. The second record indicates the call forwarded DN as ORIGID and the outgoing trunk as TERID. Both records have the same timestamp and duration data. An End record is generated at the end of the call.

When Call Forward is activated for an incoming-TIE-to-outgoing-TIE call, two Normal records are generated — one record for the incoming TIE trunk to phone, a second record for the phone to outgoing TIE trunk. In

an MCDN network, if the outgoing call is not answered, only one Normal record is generated. If the outgoing call is answered, two N records are generated as stated above.

With PPM or AOC activated and when a station user who is connected to a metered trunk transfers the trunk to another internal or MCDN station, charge information in the form of either PPM pulses or ISDN Information Elements is assigned as follows:

- While the dialed station is still ringing, charge information accumulates against the transferring station until the call is answered by the called party or abandoned by the dialing party.
- If the station user transfers the call after consulting with the dialed station user, the charge information is assigned to the transferring station until the call is transferred.
- If the transferred call is redirected for any reason, charge information is assigned to the transferring station until the call is transferred.

With the Time to Answer feature enabled, the time taken to answer the original call is output in the S record. The Time to Answer information for the transfer is output in either the associated X (Transfer) or E (End) record.

### **Conference**

When Conference is activated on an established call, an S record is generated as described for the Call Transfer feature. A subsequent S record is generated for each CDR-activated trunk that is included in the conference. The Duration field, which appears on CDR tape but not in TTY output, is calculated from the previous S record time stamp to the current S record time stamp. Although the sequence of related S records generated is alterable by CDR processing routines, chronological (time stamp) data remains intact and each S record is generated before its corresponding E (End) record. The E (End) record shows the conference bridge as ORIGID and the trunk as TERID.

With PPM or AOC activated and when a metered trunk is added to a conference, charge information in the form of either PPM pulses or ISDN Information Elements is assigned as follows:

- The charge information is assigned to the party that included the trunk in the conference until that party disconnects.
- If the party that included the metered trunk disconnects from the conference prior to the termination of the conference, all charge information up to that time is applied to that party and all future charge

information is assigned to the last station to disconnect from the conference.

With PPM or AOC activated and when an attendant conference includes one or more metered trunks, charge information in the form of either PPM pulses or ISDN Information Elements is assigned as follows:

- If the metered trunk is the source of the attendant conference and the attendant is the last internal party to disconnect from the conference, all charge information is assigned to the attendant meter.
- If an attendant with a metered trunk as the source of an attendant conference disconnects from the conference, all charge information is assigned to the meter of the last party to disconnect from the conference.
- If the attendant has the metered trunk or trunks as destinations, all charge information is assigned to the meter of the source party.

### **Other features**

On established calls, an S record is generated for the following features:

- Barge-In/Busy Verify
- Privacy release
- Override

Calls that would usually generate an N (Normal) record are altered to generate an S record. The record indicates that a feature was activated during the call, as well as any changes to the parties involved. The trunk ID remains consistent throughout. An E (End) record is generated on call termination.

## **X record (Transfer)**

X (Transfer) records contain detailed information about a transfer. The X record shows which parties were connected during the transfer stages of the call.

S (Start), X, and E (End) records are generated in order. However, there may be intervening records associated with other calls. All records associated with one call can be identified by the Terminating ID (TERID) which contains the same trunk route member (rrrrmm) number.

### **Feature interactions/Call scenarios**

#### **Periodic Pulse Metering (PPM) or Advice of Charge (AOC)**

If an outgoing Periodic Pulse Metering or Advice of Charge (AOC) equipped trunk is transferred only once, one S and one E record are generated. If an outgoing Periodic Pulse Metering or AOC-equipped trunk is transferred more than once, X records are generated.

CDRX package 259 allows non-metered outgoing CO trunks to generate X records. However, the Trunk Route type must be one of these CO trunk types: COT, FEX, WAT, or DID.

The duration of a call transfer can be calculated by comparing the time stamp in one X record with the time stamp in its preceding X record. This indicates the billing time for this portion of the call for the identified originator. The PPM or AOC count applies only to this segment of the call.

#### **Barge-In, Busy Verification, Privacy Release, or Override**

When Barge-In, Busy Verification, Privacy Release or Override is applied to an established call, an S record is generated. Calls that would normally generate an N (Normal) record are altered to generate an S (Start) record. The S record indicates that a feature was activated during the call, as well as any changes to the parties involved. The trunk ID remains consistent throughout. An E record is generated on termination of the call.

If a call is transferred with the Time to Answer feature enabled, the time taken to answer the original call is output in the S record. Time to Answer information for the transfer is output in either the associated X or E record.

### **E record (End)**

Each E (End) record is associated with a specific S (Start) record and possibly a number of X (Transfer) records. The E record is generated when the call is terminated. The E record shows the final disposition of the call. The time stamps on corresponding S, X, and E records can be used to calculate the duration of a call.

E records can contain a BLID field. The BLID field identifies the billable party where a metered trunk has been transferred to another Meridian Customer Defined Network (MCDN) node.

### **Feature interactions/Call scenarios**

#### **Call Transfer with Time to Answer**

When a call is transferred with the Time to Answer feature enabled, the time taken to answer the original call is output in the S (Start) record. Time to Answer information for the transfer is output in either an associated X (Transfer) or E (End) record.

**End of Call (EOC)**

When the EOC option is used, charge information is delivered from the Central Office, (for example, using a Primary Rate connection) and only included in the End record, using the CHGINFO and CALLCHG fields. CHGINFO and CALLCHG fields for the corresponding Start and Transfer records are Zero. The charge for each segment of a transferred call can be assigned in proportion to the duration for each segment.

The information is given both in equivalent counts (calculated using the internal conversion factor) and cost (using the internal unit cost factor).

**I record (Initialization)**

After a system initialization, a single I record is generated.

**T record (Time stamp)**

When the system time or date is changed from either the attendant console or a TTY, a consecutive pair of T records is generated specifying the old and new time stamps. The first record in the pair shows the old time stamp, and the second record shows the updated time stamp.

**A record (Authorization Code/Scheduled Access Restriction)**

The A record is optional and is enabled using LD 88. With ACDR = YES, Authorization Code information is output in the A record. With SCDR = YES, Scheduled Access Restriction (SAR) information is output in the A record. An A record is generated for Authorization Codes when the code is entered and one of the following occurs:

- a trunk is seized.
- a local phone answers Direct Inward System Access (DISA) calls.
- Ring Again is activated, in which case both the ORIGID and TERID fields are recorded as the DN associated with the phone which enters the authorization code.

When authorization codes are stored as Auto Dial or Speed Call entries, the number stored must contain the access code followed only by the Authorization Code. All digits after the access code are interpreted as Authorization Code digits.

An A record is generated for Scheduled Access Restriction when a valid SAR Flexible Feature Code (FFC) is entered.

**Feature interactions/Call scenarios****Ring Again**

When Ring Again is activated, an A record for the Authorization Code is generated only after a trunk is seized.

If the Ring Again offer is cancelled or ignored, no CDR A record appears. If the Ring Again offer is accepted, the line is seized when accepted, and a CDR A report is generated.

If an Authorization Code is entered, but the call is not completed, a call record is produced with a blank TERID field.

CDR A records contain the usual fields:

- If there is an internal connection, CDR shows the originating DN and terminating DN.
- If there is a trunk call, CDR shows the originating DN and the terminating route/trunk member.

## **C record (Charge Account)**

The C (Charge Account) record is designed to allow billing of calls to specific charge account numbers. Charge account number lengths (2 to 23 digits) are defined for each customer, using LD 15. A Charge Account record is generated when a charge code is entered at one of the following times:

- before the caller dials to establish a call.
- during an established incoming or outgoing call.
- before a conference call is established with each party.

### **Feature interactions/Call scenarios**

#### **Charge numbers of fixed length**

The system assumes that a charge account number is valid when the number of digits entered matches the account number length, as defined in LD 15.

When a charge account number is entered before establishing a call and too few digits are entered, the system waits 30 seconds (15 seconds for 500/2500-type phones) for further input. If no further digits are entered, overflow tone is provided for 15 seconds after which the phone is locked out by the system. A Charge Account record is generated showing the partially entered account number.

When a charge account number is entered during an established call and too few digits are entered, no response is given until the interdigit timeout occurs. Overflow tone is provided for 15 seconds, and the previously established call is connected. On analog (500/2500-type) phones, if the user does not wait for a response and has dialed too few digits, each

switchhook flash is interpreted as a digit 1 until the charge account length is reached. Dial tone is then returned and the next switchhook flash connects the call.

On Meridian 1 proprietary phones without a charge key, if the user does not wait for a response and has dialed too few digits, the call is reestablished when the DN key is pressed. However, no Charge Account record is produced.

### **Charge numbers of variable length**

Attendant Consoles and Meridian 1 proprietary phones equipped with a charge (CHG) key permit entry of charge account numbers containing less digits than defined. The charge account number entered is accepted by the system when the CHG key is pressed.

A charge account number entry is also accepted by the system by operating a DN, Call Transfer, or Conference key that was active before the CHG key was operated.

The CHG key may also be used to terminate an entry to correct an error or to enter multiple charge account numbers.

### **Number deletion**

A C record is not output by the system unless the call involves a trunk and meets the criteria set for CDR in the Route Data Block.

### **Call Transfer**

An external call transferred from one phone (A) to another phone (B) generates an S (Start) record for phone A and an E (End) record for phone B when the call is terminated.

However, if phone B enters a charge account number and transfers the call to another phone (C), a Charge Account record is output for phone B.

If the PPM or AOC Message Registration features are not enabled, the resulting S (Start) and E (End) records do not indicate that phone B or any other intermediate phone was involved in the call. An L (Internal) record indicates B's involvement with the call. The S (Start), C, and E (End) records are associated on a time stamp and trunk basis. The trunk is the same on all three records.

If PPM or AOC Message Registration features are enabled, an X (Transfer) record is generated for all metered calls. The S (Start), C (Charge Account), X (Transfer), and E (End) records are associated on a time stamp and trunk basis. The trunk is the same on all records.

No S (Start) or E (End) records are generated when the call is an internal call.

## **M record (Charge Conference)**

M (Charge Conference) records allow one or more charge account numbers to be assigned to one, some or all members of a conference call. Individual S (Start), M (Charge Conference), and E (End) records are generated for each trunk participating in the call. Individual E (End) records are generated for each trunk as it disconnects.

An M record is generated when a charge account code is entered after a conference is completed.

### **Feature interactions/Call scenarios**

#### **Different account numbers**

To assign portions of a Conference call to different charge account numbers, the account numbers must be entered when adding a trunk to a conference and before the conference is established. For analog (500/2500-type) phones, the account number is entered after the switch hook flash and before the trunk is dialed. For Meridian 1 proprietary phones, the account number is entered after the Conference key is pressed, either before or after the trunk is dialed, and before the Conference key is pressed again. A charge account number is generated for each trunk added to the conference.

#### **Single account numbers**

When all parties in a Conference call are assigned the same charge account number, only one entry is required. When all the trunks are included in the conference, the charge account number is entered in the usual manner. An M record shows the phone entering the number, the trunk added, and the charge account number.

## **P record (Calling Party Number)**

The P (Calling Party Number) record is useful in matching phone company billing records of collect calls against call detail records. Entering a Calling Party Number (CPN) of 1 to 23 digits by using a CPN key assigned to Attendant Consoles and Meridian 1 proprietary phones results in the generation of a P record. A P (Calling Party Number) record is generated each time the CPN key is used, allowing for the generation of multiple P (Calling Party Number) records.

P records are not generated until the attendant extends the call.

## F, R, and Q records (ACD call connections)

Connection records are used with Automatic Call Distribution (ACD) applications connecting to auxiliary facilities (for example, customer defined host computer processors).

The three types of Connection records are R, Q, and F records. R records are generated for ACD calls that are transferred. Q records are generated for calls connecting a trunk and an ACD agent. F records are generated for ACD Conference calls.

The appropriate Connection record is generated for each connection made with an ACD agent linked to a customer provided host computer processor. Connection records allow agents to establish and modify the profile (such as the caller's name, address, or other information) of a transferred or conferenced call that is in progress. This call profile is entered in the host processor and can be displayed on an ACD agent terminal.

When the host processor finds a Connection record, it scans the CDR records for other Connection records related to that call and displays existing call profiles on the Automatic Call Distribution (ACD) agent's screen. If the call is transferred or conferenced to another agent, the call profile appears on the monitor of that agent. The agent can then change the call profile, if required. This process is repeated for subsequent transfers and conferences until the agent terminates a call or transfers it to a non-agent.

The DURATION field of Connection records contain the length of time a call has to wait before being served. Optionally, the host processor can read this information and provide RUSH displays on agent screens to signal that calls are waiting too long.

The CDR format of Connection records is similar to the N record, except that the TERID field contains the Terminal Number (TN) (packed format) of the agent phone.

**Note:** Magnetic tape devices do not store Connection records.

### R records and F records

If the call is transferred to or involved in a conference with another agent, the call profile is output on the second agent's terminal. The second agent can then change the call profile as required. Further transferring or involvement in conferences is treated in the same manner. When the host processor finds a Connection record, it scans the CDR records for other Connection records related to that call. Any call profiles entered

earlier are displayed on the ACD agent's screen. This is repeated on all subsequent transfers and conferences until the call is terminated by an agent or transferred to a non-agent.

**Note:** An incoming Central Office (CO) trunk does not create any digits in the R record.

### **Q records**

The Q record helps customers link their Voice Response Unit (VRU) with the appropriate trunk for delivering an electronically constructed message to callers. This reduces an agent's work time for the call.

**Note:** An incoming central office (CO) trunk does not create any digits in the Q record.

## **L record (Internal CDR)**

An L record is produced when the Internal CDR criteria are satisfied. At least one L record is produced when internal calls are modified, forwarded, or transferred.

### **Feature packaging**

Internal CDR (ICDR) requires basic CDR. To receive an ICDR record, the customer must have CDR-TTY (CTY) enabled.

### **Feature interactions/Call scenarios**

Data input for ICDR is not supported by Attendant Administration.

An L (Internal) record is output under the following conditions:

- the Call Detail Recording (CDR) feature is enabled
- all connected parties are stations, attendants or in conference
- at least one of the parties involved has ICDR allowed (CLS = ICDA in LD 10 or LD 11; ICDR = ICDA in LD 12)

If the preceding criteria are satisfied, the following applies:

- An L (Internal) record is produced at the release of an internal call.
- One or more L (Internal) records are produced at the completion of call modification of an internal call.
- L (Internal) records are produced at the release of a multiparty call.

**Automatic Call Distribution (ACD)**

L (Internal) records are produced for ACD as follows:

- At the completion of an internal call.
- When the Agent Observe function is released, an L (Internal) record is produced for the agent and the internal party.
- L (Internal) records are produced when the supervisor activates or releases the Answer Emergency feature.

**Note:** In all cases, the ACD Position ID is shown in the ORIGID or TERID field.

**Busy Verify**

When the attendant conducts Busy Verify on a phone, the established parties are connected in a conference and an L (Internal) record is produced. L (Internal) records are produced when Busy Verify is released, as described for Conference calls.

**Call Park**

An L (Internal) record is output when an ICDR call is parked.

**Conference**

Internal records are produced for Conference calls when a party joins or leaves the Conference. Internal records indicate the conference loop as the ORIGID. The last two parties remaining on a Conference call are recorded as a normal call.

**Group Call**

The L (Internal) record produced when a party is disconnected from a group call identifies the party and the conference loop.

**Japan features**

The CDR and Answer Supervision features provide a half-second accuracy option. L (Internal) records have two-second accuracy in the DURATION field, even if the half-second option is enabled. For more information, refer to the Japan Central Office Trunks feature.

**Override**

When phone A overrides phone B that is connected to phone C, a three-party conference is established. When phone A releases, L (Internal) records are produced showing the conference loop and each party.

L (Internal) records are also produced when the attendant releases from Override on a Do-Not-Disturb phone.

### **Voice messaging**

L (Internal) records for calls routed to a voice messaging system contain the agent ID in the TERID field.

### **G record (Internal Meridian 1 Packet Handler data call)**

A G record is produced when:

- CDR is configured for the customer.
- the Meridian 1 Packet Handler (MPH) Terminal Service Profile (TSP) has CDR = YES in LD 27.
- an internal data connection to the MPH is released.

### **H record (External Meridian 1 Packet Handler data call)**

An H record is produced for:

- *incoming* data packet calls from the Public Network to the Meridian 1 Packet Handler (MPH) if IMPH = YES in LD 17.
- *outgoing* data packet calls from the MPH to the Public Network if OMPH = YES in LD 17.

The records are generated when an external connection has been released.

### **D record (Station Activity)**

A D record is produced when CDR is configured for the customer and a trunk either terminates on, or is accessed by, a phone with CDMA class of service (CLS = CDMA in LD 10 or LD 11).

#### **Feature packaging**

D records are output only when the Station Activity Call Detail Recording (SCDR) package 251 is equipped. The SCDR package has the following prerequisites:

- base Call Detail Recording (CDR) package 4,
- CDR-TTY (CTY) package 5.

#### **Feature interactions/Call scenarios**

##### **Call Redirection**

A D record is produced for a phone engaged in a trunk call which has CDMA Class of Service. A D record is not generated for any phone which does not answer the call, regardless of whether it has CDMA or CDMD Class of Service. Any other records generated during the call are not affected.

**Call Transfer**

A D record is generated when a phone with CDMA Class of Service transfers a trunk call to another phone. CDR X record generation is not affected. The phone to which the call is transferred also produces a D record if it has CDMA class of service and answers the call. When the D record is produced for the phone to which the call has been transferred, the digits field of the D record shows the digits dialed by the transferring phone.

**Conference**

A phone engaged in a trunk call that has CDMA Class of Service generates a D record only when the phone conferences the first party. Additional "D" records are not generated if the conference is expanded. An additional D record is generated if the last conference to go on hook has CDMA class of service and if the last conferencee was not the originator of the conference. This does not affect any other CDR record generation during a conference.

**CDR Route options**

If a phone involved in a call has CDMA Class of Service, D records are output regardless of the CDR option assigned to the phone in the Route Data Block (LD 16). If CDR records are to be output for the trunk route, D records are output along with the other record types. If CDR records are not to be output for the trunk route, only D records are generated.

**Y record (Public Network Feature Invocation)**

A Y record is generated whenever a system user accesses a feature using an ISDN trunk on the Public Exchange/Central Office to which the system is connected. The only feature capable of generating Y records is the "Public Service Telephone Network (PSTN) Three Party Conferencing" feature of the NEAX-61.

**Feature interactions/Call scenarios****PSTN Three Party Conferencing CDR**

The CDR output from the "PSTN Three Party Conferencing" is different in certain respects from a system-based conference as only a single trunk is used, and no information on a change of state for the external callers is provided, therefore timing information is less reliable. Additionally, whenever a CDR record is generated to indicate the start of a conference, there is also an additional, external charge.

As a result, no attempt is made to make the CDR records match the normal "S" and "E" records of conference calls with two trunks. Instead of two "S" records at the start of the conference, a single "Y" record is generated to indicate a PSTN feature is invoked. This "Y" record includes

all digits dialed to access the third party. The final record, produced on call clearing, remains as an "N" record, and includes information from the original call.

For the PSTN Three Party Conferencing feature, CDR "N" record generation is based on having the main call meet the CDR criteria. If CDR is only enabled for incoming calls and if the first party is an incoming external call, an "N" record is generated for the original call. For outgoing calls, a CDR is generated if the response to the CDR sub-prompt OTL is YES (and the call is toll), or the response to the OAL sub-prompt is YES.

**Note:** For business systems (Private Branch Exchanges [PBX]) in New Zealand, all calls are charged varying amounts depending on geographical area; OAL is highly recommended.

CDR "Y" records are controlled by the prompt CDRY in the Route Data Block (RDB). If CDRY is YES, CDR "Y" records are generated on the first Trunk Hookswitch Flash (THF) after the system receives the INFO message, Info Request "Complete". In the case of a misoperation, where the user releases after the "Complete" rather than doing a THF, the record is produced.

**Note:** CDR "Y" records can be generated for calls without an associated "N" record being generated. The case is as follows: An incoming call has its RDB set to not generate CDR records for incoming calls and the response to CDRY was YES terminates on an internal phone. The internal phone initiates a "PSTN Three Party Conference". The only record generated would be the "Y" record.

### **PSTN Three Party Conferencing abnormal operation**

**Aborting the Conference** The conference operation can be aborted by pressing the Centrex Flash key or dialing the Centrex FFC a second time without dialing a destination. This second flash requests the network complete the operation in progress. As the called number is still incomplete, the PSTN will abort the conference.

Because the INFORMATION message with the Information IE (Information Request Complete) has not been received, the system aborts any CDR processing that would have occurred with a completed call.

**Aborting the Conference Unanswered Call** A second flash (Centrex key or FFC) will cause the NEAX-61 to attempt completion of the conference. Because it is not established to the third party, the extra party is dropped. Because the INFORMATION message with the Information IE (Information Request Complete) was received, the system must do all CDR processing as though it was a completed call.

**Conference Controlling Party Goes On-Hook** This is a billing concern. Releasing the call to the external parties could leave the system as the billed party for calls in which the system is no longer involved. However, current operations on the NEAX-61 result in the call being torn down completely if the controlling party goes on-hook. Therefore, unless there is a change in the PSTN operation, this concern may be ignored.

An incoming call from the PSTN conferencing with another PSTN number will have only charges relating to the SECOND call assigned to the system. The call is billed as two separate calls, with each "branch" of the call billed separately, although the CONFERENCE charges is billed to the system user.

### Other Abnormal Operations

As all other abnormal operations are exclusively in the PSTN environment, these is country and system based, and will conform to local operation standards and regulatory requirements for the PSTN switch.

### CDR Record Production

When either the system party (which is the controlling party for the call) releases the call, or both of the public network parties release, the call is torn down. A CDR record is generated for the original caller's number, if required by the call type.

Note that "TOLL vs. all" should not be a concern for outgoing calls, as all calls in a business environment are charged. The PSTN provides a flat rate charge for conference feature usage; since the outward call is charged, ANY conference is effectively a toll call. However, from the CDR perspective, we can eliminate "local" calls since the charge is relatively negligible.

**Table 150**  
CDR records output versus options selected

Initial call incoming:				
INC	OAL	OTL	CDRY	Result
YES	N/A	N/A	YES	both numbers generate CDR records
YES	N/A	N/A	NO	only the N record is produced
NO	N/A	N/A	YES	only CDR Y record is produced
NO	N/A	N/A	NO	no CDR record is generated

**Table 151**  
Initial call outgoing TOLL

Initial call outgoing TOLL:				
INC	OAL	OTL	CDRY	Result

**Table 151**  
**Initial call outgoing TOLL (cont'd.)**

Don't Care	YES	NO	YES	both numbers generate CDR records
Don't Care	NO	YES	YES	both numbers generate CDR records
Don't Care	NO	NO	YES	only CDR Y record is produced
Don't Care	YES	NO	NO	only the N record is produced
Don't Care	NO	YES	NO	only the N record is produced
Don't Care	NO	NO	NO	no CDR record is generated

**Table 152**  
**Initial call outgoing non-TOLL**

Initial call outgoing non-TOLL:				
INC	OAL	OTL	CDRY	Result
Don't Care	YES	NO	YES	both numbers generate CDR records
Don't Care	NO	YES	YES	only CDR Y record is produced
Don't Care	NO	NO	YES	only CDR Y record is produced
Don't Care	YES	NO	NO	only the N record is produced
Don't Care	NO	YES	NO	no CDR record is generated
Don't Care	NO	NO	NO	no CDR record is generated

## Priority Connection Record

Connection records integrate Automatic Call Distribution (ACD) operation with host processor facilities to transfer call profiles among agents. In the integrated environment, call completion has three components:

1. switching through a voice path,
2. informing the computer of the connection (Connection record),
3. having the host processor display the call profile on the terminal of the agent receiving the call.

The time required to process all three parts of the call is cumulative. To reduce the real-time required to complete the call, Connection records have priority over other types of CDR records. Priorities are assigned in this order:

1. High priority timing queue,
2. Network input messages,
3. Regular timing queue,
4. Call ringing,
5. TTY input,

6. CDR Connection Call Processing records,
7. Other functions at lower priority levels (including other CDR records).

## CDR record sequencing

### Call sequence for an incoming-trunk-to-agent call

The simplest type of call to an ACD DN is an incoming call from a trunk to an agent. The typical sequence of CDR record for this type of call is:

- **Q record:** indicates a connection has been established
- **N record:** indicates that the call is terminated

### Call sequence for a transfer or conference call

Calls involving transfer and conference generate a sequence of Connection, S (Start), X (Transfer), and E (End) records.

A typical sequence of records for a transfer call is:

1. **Q record:** Indicates that a connection has been established.
2. **S record:** Indicates that the first leg of the call was completed. Timing and other data are provided for this portion of the call. This record is only generated for the first leg of a call.
3. **X record** is available for PPM, AOC and CDR Transfer Enhancement (CDRX) related calls. After an S record has been printed, each subsequent call modification will print an X record. This X record provides timing and other PPM and AOC information for that segment of the call.
4. **R record:** Indicates that the call was transferred to a second agent. This record may appear before the S record when the first agent disconnects after the second agent answers. Another R record is generated each time the call is transferred to subsequent agents. There can be any number of additional R records.
5. **E record:** Indicates that the call is ended. It provides timing and other data for that call.

A typical sequence of records for a conference call is:

1. **Q record:** Indicates that a connection was established.
2. **F record:** Indicates that a new connection was established between two parties for a conference.
3. **S record:** Indicates that the conference was set up (third party included in conference). It provides timing and other information for the connection. Only one S record is generated.

4. **X record** is available for PPM, AOC and CDR Transfer Enhancement (CDRX) related calls. After an S record has been printed, each subsequent call modification will print an X record. This X record provides timing and other PPM and AOC information for that segment of the call.
5. **F record**: Generated each time a conference connection is made.
6. **E record**: Indicates that the call has ended. It provides timing and data for that call.

Because Connection records are processed at a higher priority than other CDR records, the actual sequence of CDR records may vary. Connection records are always output before other types of records. Under heavy traffic conditions, Connection records may be output five or more seconds before other types of records. Serial numbers indicate the actual sequence of the CDR records.

---

# Examples of call records

---

## Contents

This section contains information on the following topics:

[“Introduction” \(page 200\)](#)

[“Authorization Code” \(page 201\)](#)

[“Authorization Code and Call Transfer” \(page 202\)](#)

[“Charge Account with AUXID” \(page 203\)](#)

[“Calling Party Number” \(page 204\)](#)

[“Charge Conference Example 1” \(page 205\)](#)

[“Charge Conference Example 2” \(page 207\)](#)

[“Charge Conference Example 3” \(page 208\)](#)

[“Call Transfer and Charge Account features” \(page 210\)](#)

[“Metered Transferred Call” \(page 211\)](#)

[“Multi-Tenant” \(page 214\)](#)

[“Calling Line Identification \(CLID\)” \(page 214\)](#)

[“Calling Line Identification \(CLID\) on a tandem call” \(page 215\)](#)

[“CDR with Outpulsed Digits” \(page 216\)](#)

[“In-Band Automatic Number Identification” \(page 219\)](#)

[“Feature Group D Automatic Number Identification” \(page 219\)](#)

[“Abandoned Call” \(page 220\)](#)

[“911 Abandoned Call” \(page 221\)](#)

[“Call Transfer, Charge Account, and Time to Answer features” \(page 221\)](#)

[“Metered Transferred Call and Time to Answer” \(page 222\)](#)

[“Attendant CDR Enhancement for outgoing non-metered CO trunks” \(page 223\)](#)

[“CDR Call Transfer Enhancement” \(page 224\)](#)

[“CDR Call Transfer Enhancement with network calls” \(page 228\)](#)

[“Station Activity Record” \(page 235\)](#)

[“Public Network Feature Invocation Record” \(page 236\)](#)

[“CDR 100 Hour Call” \(page 236\)](#)

## Introduction

The basic CDR call records include the identity of the called and calling parties, and the duration of the call. Additional records are generated when certain features are used (such as conference or authorization codes) or by certain system events (such as initialization or change of system time clock).

For all the examples shown in this section, the output described relates to that particular feature only and the output given is the TTY output. Other, unrelated, call records can be inserted between the call records shown. Therefore, when using CDR outputs pay careful attention to the Record type (RecType) field definition.

[Table 153 "CDR examples" \(page 200\)](#) lists all the examples in this chapter and the page on which they are located.

**Table 153**  
**CDR examples**

Feature Name
<a href="#">“Authorization Code” (page 201)</a>
<a href="#">“Authorization Code and Call Transfer” (page 202)</a>
<a href="#">“Charge Account with AUXID” (page 203)</a>
<a href="#">“Calling Party Number” (page 204)</a>
<a href="#">“Charge Conference Example 1” (page 205)</a>
<a href="#">“Charge Conference Example 2” (page 207)</a>

**Table 153**  
**CDR examples (cont'd.)**

Feature Name
"Charge Conference Example 3" (page 208)
"Call Transfer and Charge Account features" (page 210)
"Metered Transferred Call" (page 211)
"Multi-Tenant" (page 214)
"Calling Line Identification (CLID)" (page 214)
"Calling Line Identification (CLID) on a tandem call" (page 215)
"CDR with Outpulsed Digits" (page 216)
"In-Band Automatic Number Identification" (page 219)
"Feature Group D Automatic Number Identification" (page 219)
"Abandoned Call" (page 220)
"911 Abandoned Call" (page 221)
"Call Transfer, Charge Account, and Time to Answer features" (page 221)
"Metered Transferred Call and Time to Answer" (page 222)
"Attendant CDR Enhancement for outgoing non-metered CO trunks" (page 223)
"CDR Call Transfer Enhancement" (page 224)
"CDR Call Transfer Enhancement with network calls" (page 228)
"Station Activity Record" (page 235)
"Public Network Feature Invocation Record" (page 236)
"CDR 100 Hour Call" (page 236)

## Authorization Code

Table 154 "Example 10 Authorization Code feature using the OLD CDR format" (page 202) gives an example involving the Authorization Code feature using the OLD CDR format.

Table 155 "Example 11 Authorization Code feature using the NEW CDR format" (page 202) gives an example involving the Authorization Code feature using the NEW CDR format.

The call scenario for these examples is:

- DN 3456 enters an authorization code number 12345678 and dials 9-212-682-3333. The call is completed on route 0, member 45.
- The Authorization Code record is generated after the code is entered and accepted. The Normal call record is generated at the termination of the call.

**Table 154**  
**Example 10**  
**Authorization Code feature using the OLD CDR format**

```
A 039 00 DN3456 T000045 09/07 11:49 12345678
A 039 00 DN3456 T000045 09/07 11:49 12345678
N 051 00 DN3456 T000045 09/07 11:51 00:07:15 92126823333
```

**Table 155**  
**Example 11**  
**Authorization Code feature using the NEW CDR format**

```
A 039 00 DN3456 T000045 09/07 11:49:00 12345678
&
&
N 051 00 DN3456 T000045 09/07 11:51:30 00:07:15.0 92126823333
&
&
```

**Note:** When DURATION is not recorded, the authorization code is output in that column for "OLD" format CDR.

## Authorization Code and Call Transfer

Table 156 "Example 12 Authorization Code and Call Transfer features using the OLD CDR format" (page 202) gives an example involving the Authorization Code and Call Transfer features using the OLD CDR format. Table 157 "Example 13 Authorization Code and Call Transfer features using the NEW CDR format" (page 203) gives an example involving the Authorization Code and Call Transfer features using the NEW CDR format.

The call scenario for these examples is:

- DN 7865 dials 9\*-714-555-9292# and the call completes through route 0 member 19. The call is transferred to DN 3131, but an authorization code (87654321) is entered prior to the transfer. The call terminates shortly after the transfer is made.
- An Authorization Code record is generated after the entry is complete. When the call is transferred, a Start record is generated. When the call is terminated, an End record is generated.

**Table 156**  
**Example 12**  
**Authorization Code and Call Transfer features using the OLD CDR format**

```
A 057 00 DN7865 T000019 09/07 13:07 87654321
S 059 00 DN7865 T000019 09/07 13:10 9*7145559292
E 079 00 T000019 DN3131 09/07 13:18
```

**Table 157****Example 13****Authorization Code and Call Transfer features using the NEW CDR format**

```

A 057 00 DN7865 T000019 09/07 13:07:20 87654321
&
&
S 059 00 DN7865 T000019 09/07 13:10:30 9*7145559292
&
&
E 079 00 T000019 DN3131 09/07 13:18:50
&
&

```

**Note:** DURATION is not supplied, but must be calculated from the TIMESTAMP field of the S and E records.

**Charge Account with AUXID**

Table 158 "Example 14 Charge Account and AUXID features using the OLD CDR format" (page 203) gives an example involving the Charge Account and AUXID features using the OLD CDR format. Table 159 "Example 15 Charge Account and AUXID features using the NEW CDR format" (page 204) gives an example involving the Charge Account and AUXID features using the NEW CDR format.

The call scenario for these examples is:

- DN 7234, a multiple appearance prime DN, dials 9-936-1212 and enters a charge account (123456). The call is completed on route 4, member 16.
- The Charge Account record is generated as soon as the account number is fully entered. The Normal record with AUXID (loop/shelf/card/unit) is generated at the termination of the call.

**Table 158****Example 14****Charge Account and AUXID features using the OLD CDR format**

```

C 008 00 DN7234 T004016 007.2.04.03 09/07 10:07 123456
N 017 00 DN7234 T004016 007.2.04.03 09/07 10:07 00:02:10 99361212

```

**Table 159****Example 15****Charge Account and AUXID features using the NEW CDR format**

C 008 00 DN7234 T004016 09/07 10:07:00 123456 & 007.2.04.03 & N 017 00 DN7234 T004016 09/07 10:07:00 00:02:10.0 99361212 & 007.2.04.03 &
---

**Note:** When DURATION is not recorded, the digits dialed are output in that column for "OLD" format CDR.

**Calling Party Number**

Table 160 "Example 16 Calling Party Number (CPN) feature using the OLD CDR format" (page 204) Table 161 "Example 17 Calling Party Number (CPN) feature using the NEW CDR format" (page 205) gives an example involving the Calling Party Number (CPN) feature using the OLD CDR format. gives an example involving the Calling Party Number (CPN) feature using the NEW CDR format.

The call scenario for these examples is:

- DN 9876 receives a collect call on route 0, member 5 and enters CPN 201-949-3000.
- The CPN record is generated after the calling party number is entered and the caller has returned to the call. The Normal record is generated at the termination of the call.

**Table 160****Example 16****Calling Party Number (CPN) feature using the OLD CDR format**

P 025 00 T000005 DN9876 09/07 11:10 2019493000
N 027 00 T00005 DN9876 09/07 11:09 00:12:05

**Table 161**  
**Example 17**  
**Calling Party Number (CPN) feature using the NEW CDR format**

P 025 00 T0000005 DN9876 09/07 11:10:00 2019493000
&
&
N 027 00 T0000005 DN9876 09/07 11:09:00 00:12:05.0
&
&

**Note:** When DURATION is not recorded, the calling party number digits are output in that column for "OLD" format CDR.

## Charge Conference Example 1

Table 162 "Example 18 Conference feature example 1 using the OLD CDR format" (page 206) gives an example involving the Charge Conference feature using the OLD CDR format. Table 163 "Example 19 Charge Conference feature example 1 using the NEW CDR format" (page 206) gives an example involving the Charge Conference feature using the NEW CDR format.

The call scenario for these examples is:

- DN 6543 establishes a conference call with 3 other parties, entering an account code prior to connecting each party. The parties were connected sequentially on route 0 members 16, 45 and 67. The parties disconnected in the order 67, 16 and 45. Conference loop 19 was used.
- The account codes entered were 123456, 123457 and 123458, in that order.
- The digits dialed were 9-969-9170 for the first party, 9-\*-212-262-6170 for the second and 9-201-542-5747 for the third.
- A Charge Account record is generated after each entry is completed. A Start record is generated after each party is added; however, the first two Start records are generated together after the system recognizes the conference situation exists. An End record is generated as each trunk disconnects.

**Table 162**  
**Example 18**  
**Conference feature example 1 using the OLD CDR format**

```
C 061 00 DN6543 T000016 09/07 15:10 123456
C 063 00 DN6543 T000045 09/07 15:11 123457
S 071 00 DN6543 T000016 09/07 15:12 99699170
S 072 00 DN6543 T000045 09/07 15:10 9*2122626170
C 073 00 DN6543 T000067 09/07 15:12 123458
S 079 00 DN6543 T000067 09/07 15:13 92015425747
E 087 00 CF01980 T000067 09/07 15:25
E 088 00 CF01980 T000016 09/07 15:31
E 091 00 CF01980 T000045 09/07 15:31
```

**Table 163**  
**Example 19**  
**Charge Conference feature example 1 using the NEW CDR format**

```
C 061 00 DN6543 T000016 09/07 15:10:25 123456
&
&
C 063 00 DN6543 T000045 09/07 15:11:15 123457
&
&
&
S 071 00 DN6543 T000016 09/07 15:12:20 99699170
&
&
&
S 072 00 DN6543 T000045 09/07 15:10:18 9*2122626170
&
&
&
C 073 00 DN6543 T000067 09/07 15:12:22 123458
&
&
&
S 079 00 DN6543 T000067 09/07 15:13:58 92015425747
&
&
&
E 087 00 CF01980 T000067 09/07 15:25:06
&
&
&
E 088 00 CF01980 T000016 9/07 15:31:08
&
&
&
E 091 00 CF01980 T000045 9/07 15:31:26
&
&
```

**Note:** DURATION is not supplied, but must be calculated from the  
TIMESTAMP field of the S and E records.

## Charge Conference Example 2

Table 164 "Example 20 Charge Conference feature example 2 using the OLD CDR format" (page 207) gives an example involving the Charge Conference feature using the OLD CDR format. Table 165 "Example 21 Charge Conference feature example 2 using the NEW CDR format" (page 208) gives an example involving the Charge Conference feature using the NEW CDR format.

The call scenario for these examples is:

- DN 6543 places the same Conference call as in "Charge Conference Example 1" (page 205), except this time the account code is entered after the conference has been established and the same account code (123456) is intended to apply to all 3 conferees. Conference loop 11 is used.
- A Start record is generated as each party is connected. The first two Start records are generated at the same time as the system recognizes a conference situation.
- After the account code is entered, a separate Charge Conference record is generated for each trunk involved.

**Table 164**  
**Example 20**

**Charge Conference feature example 2 using the OLD CDR format**

```
S 103 00 DN6543 T000016 09/07 11:17 99699170
S 104 00 DN6543 T000045 09/07 11:17 9*2122626170
S 107 00 DN6543 T000067 09/07 11:18 92015425747
M 112 00 T000045 DN6543 09/07 11:19 123456
M 113 00 T000016 DN6543 09/07 11:19 123456
M 115 00 T000067 DN6543 09/07 11:19 123456
E 121 00 CF01122 T000067 09/07 11:40
E 126 00 CF01122 T000016 09/07 11:45
E 127 00 CF01122 T000045 09/07 11:47
```

**Note:** DURATION is not supplied, but must be calculated from the TIMESTAMP field of the S and E records.

**Table 165****Example 21****Charge Conference feature example 2 using the NEW CDR format**

S 103 00 DN6543 T000016 09/07 11:17:12 99699170 & &
S 104 00 DN6543 T000045 09/07 11:17:58 9*2122626170 & &
S 107 00 DN6543 T000067 09/07 11:18:46 92015425747 & &
M 112 00 T000045 DN6543 09/07 11:19:06 123456 & &
M 113 00 T000016 DN6543 09/07 11:19:10 123456 & &
M 115 00 T000067 DN6543 09/07 11:19:48 123456 & &
E 121 00 CF01122 T000067 09/07 11:40:48 & &
E 126 00 CF01122 T000016 09/07 11:45:36 & &
E 127 00 CF01122 T000045 09/07 11:47:22 & &

**Charge Conference Example 3**

[“DNIS: Dialed Number Identification Service” \(page 152\)](#) gives an example involving the Charge Conference feature using the OLD CDR format.  
[Table 165 "Example 21 Charge Conference feature example 2 using the NEW CDR format" \(page 208\)](#) gives an example involving the Charge Conference feature using the NEW CDR format.

The call scenario for these examples is:

- DN 8765 places a Conference call with 2 other parties on route 0 members 27 and 37. A charge account (123456) is entered after the conference is established. Conference loop 11 is used.
- Later, during the conference, a fourth party on route 0 member 47 is added, but a new charge number (123457) is entered prior to adding the fourth party.
- Two Start records are generated after the conference is established.
- Two Charge Conference records are generated after the charge account entry is made.
- A Charge record is generated after the new charge number is entered.
- Start record is generated after the fourth party is added.
- End records are generated as the trunks disconnect from the conference.

**Table 166**  
**Example 22**  
**Charge Conference feature example 3 using the OLD CDR format**

S 017 00 DN8765 T000027 09/08 10:10 99291123
S 018 00 DN8765 T000037 09/08 10:11 99461130
M 021 00 T000037 DN8765 09/08 10:12 123456
M 023 00 T000027 DN8765 09/08 10:12 123456
C 037 00 DN8765 T000047 09/08 10:27 123457
S 039 00 DN8765 T000047 09/08 10:29 9*9299170
E 051 00 CF01122 T000037 09/08 11:10
E 053 00 CF01122 T000047 09/08 11:10
E 055 00 CF01122 T000027 09/08 11:11

**Note:** DURATION is not supplied, but must be calculated from the TIMESTAMP field of the S and E records.

**Table 167**  
**Example 23**  
**Charge Conference feature example 3 using the NEW CDR format**

S 017 00 DN8765 T000027 09/08 10:10:08 99291123 & &
S 018 00 DN8765 T000037 09/08 10:11:22 99461130 & &
M 021 00 T000037 DN8765 09/08 10:12:56 123456 & &
C 037 00 DN8765 T000047 09/08 10:27:38 123457 & &
S 039 00 DN8765 T000047 09/08 10:29:00 9*9299170 & &
E 051 00 CF01122 T000037 09/08 11:10:50 & &
E 053 00 CF01122 T000047 09/08 11:10:36 & &
E 055 00 CF01122 T000027 09/08 11:11:24 & &

## Call Transfer and Charge Account features

[Table 168 "Example 24 Call Transfer and Charge Account features using the OLD CDR format" \(page 211\)](#) gives an example involving the Call Transfer and Charge Account features using the OLD CDR format.  
[Table 169 "Example 25 Call Transfer and Charge Account features using the NEW CDR format" \(page 211\)](#) gives an example involving the Call Transfer and Charge Account features using the OLD CDR format.

The call scenario for these examples is:

- DN 6789 enters account code 123451 and dials 9\*232-916-9166. The call is completed on route 0 member 6 and later transferred to DN 5600.
- Later the call is transferred back to DN 6789 and terminated shortly after.

- An Account Code record is generated when the entry of the code is complete.
- When the call is transferred, a Start record is generated.
- When the second transfer takes place, no record is generated as a Start record already exists for the trunk in use.
- When the call terminates, an End record is generated.

**Note:** The identity of the intermediate party (DN 5600) is lost because an additional account code was not entered during or prior to the call transfer.

Table 168

## Example 24

Call Transfer and Charge Account features using the OLD CDR format

C 076 00 DN6789 T000006 09/08 11:15 123451
S 081 00 DN6789 T000006 09/08 11:16 9*2329169166
E 097 00 T000006 DN6789 09/08 11:31

Table 169

## Example 25

Call Transfer and Charge Account features using the NEW CDR format

C 076 00 DN6789 T000006 09/08 11:15:10 123451 & &
S 081 00 DN6789 T000006 09/08 11:16:22 9*2329169166 & &
E 097 00 T000006 DN6789 09/08 11:31:42 & &

**Note:** DURATION is not supplied, but must be calculated from the TIMESTAMP field of the S and E records.

## Metered Transferred Call

Table 170 "Example 26 Metered Transferred Call using the OLD CDR format" (page 212) gives an example involving a Metered Transferred Call using the OLD CDR format. Table 171 "Example 27 Metered Transferred Call using the NEW CDR format" (page 213) gives an example involving a Metered Transferred Call using the NEW CDR format.

Table 172 "Example 28 Metered Transferred Call with CDR Transfer Enhancement active" (page 213) gives an example involving a Metered Transferred Call with the CDR Transfer Enhancement (CDRX) active.

The call scenario for these examples is:

- DN 7234 dials 99660100 to make an outgoing call. The call is routed over a Route 4 member 16. Route 4 is a PPM metered route.
- After three minutes and eight seconds have elapsed, DN 7234 transfers the call to DN 5345.
- DN 5345 talks to the trunk party for six minutes and transfers the call to DN 5346.
- DN 5346 talks to the trunk party for less than a minute and transfers the call to DN 5333.
- DN 5333 talks to the trunk party for three minutes and releases the trunk party.

**Table 170**  
**Example 26**  
**Metered Transferred Call using the OLD CDR format**

S 008 00 DN7234 T004016 007.2.04.03 09/07 10:01 00:03:08 9660100 00029 000058
X 027 00 DN5345 T004016 09/07 10:10 00037 000074
X 044 00 DN5346 T004016 09/07 10:10 00003 000006
E 046 00 DN5333 T004016 09/07 10:13 00:09:56 00031 000062

From Table 170 "Example 26 Metered Transferred Call using the OLD CDR format" (page 212), the Start and End times and duration for each segment of the call can be calculated as follows:

ORIGID	Start time	End Time	Duration
7234	10:01	10:04	3 minutes 8 seconds
5345	10:04	10:10	6 minutes
5346	10:10	10:10	Less than 1 minute
5333	10:10	10:13	3 minutes
<b>Total Call</b>	<b>10:01</b>	<b>10:14</b>	<b>13 minutes 4 seconds</b>

**Table 171**  
**Example 27**  
**Metered Transferred Call using the NEW CDR format**

S 008 00 DN7234 T004016 09/07 10:01:00 00:03:08.0 9660100 & 00029 000058 007.2.04.03 &
X 027 00 DN5345 T004016 09/07 10:10:08 & 00037 000074 &
X 044 00 DN5346 T004016 09/07 10:11:03 & 00003 000006 &
E 046 00 DN5333 T004016 09/07 10:14:04 00:09:56.0 & 00031 000062 &

From Table 171 "Example 27 Metered Transferred Call using the NEW CDR format" (page 213), the Start and End times and duration for each segment of the call can be calculated as follows:

ORIGID	Start time	End Time	Duration
7234	10:01	10:04	3 minutes 8 seconds
5345	10:04	10:10	6 minutes
5346	10:10	10:10	55 seconds
5333	10:10	10:14	3 minutes 1 second
<b>Total Call</b>	<b>10:01</b>	<b>10:14</b>	<b>13 minutes 4 seconds</b>

**Note:** The second line in each record is charge information and call charge if "OLD" format CDR is selected.

**Table 172**  
**Example 28**  
**Metered Transferred Call with CDR Transfer Enhancement active**

S 008 00 DN7234 T004016 09/07 10:01:00 00:03:08.0 9660100 & 00029 000058 007.2.04.03 &
X 027 00 DN5345 T004016 09/07 10:10:08 00:06:08.0 & 00037 000074 &
X 044 00 DN5346 T004016 09/07 10:11:03 00:00:55.0 & 00003 000006 &
E 046 00 DN5333 T004016 09/07 10:14:04 00:03:01.0 & 00031 000062 &

## Multi-Tenant

Table 173 "Example 29 Multi-Tenant feature using the OLD CDR format" (page 214) gives examples of calls in the Multi-Tenant Service environment using the OLD CDR format. Table 174 "Example 30 Multi-Tenant feature using the NEW CDR format" (page 214) gives examples of calls in the Multi-Tenant Service environment using the NEW CDR format.

1. DN 4999, a member of Tenant group 042, Customer 5, dials 9-828-9124. The trunk is a shared system resource.
2. DN 5000 of Customer 4 receives an incoming call. Tenant 4 has not enabled Tenant Service, so all resources contain a 000 in the Tenant Number field.
3. DN 5064 of Tenant 5 receives an incoming call. Customer 5 has Tenant Service enabled but the station does not belong to a Tenant group so all resources contain a 000 in the Tenant Number fields.

**Table 173**  
**Example 29**  
**Multi-Tenant feature using the OLD CDR format**

N 001 05 DN4999 A001009 027.1.02.01 06/28 10:14 00:00:20 98289124 042 000
N 001 04 T002010 DN5000 06/28 10:15 00:00:40 000 000
S 002 05 T002004 DN5064 06/28 10:18 000 000

**Table 174**  
**Example 30**  
**Multi-Tenant feature using the NEW CDR format**

N 001 05 DN4999 A001009 06/28 10:14:00 00:00:20.0 98289124 & 027.1.02.01 042 000 &
N 001 04 T002010 DN5000 06/28 10:15:00 00:00:40 & 000 000 &
S 002 05 T002004 DN5064 06/28 10:18:50 & 000 000 &

## Calling Line Identification (CLID)

Table 175 "Example 31 Calling Line Identification (CLID) using the OLD CDR format" (page 215) gives examples of calls in the Multi-Tenant Service environment with CLID using the OLD CDR format. Table 176

"Example 32 Calling Line Identification (CLID) using the NEW CDR format" (page 215) gives examples of calls in the Multi-Tenant Service environment with CLID using the NEW CDR format.

- CLID and Multi-Tenant enabled for a customer.
- Only CLID enabled for a customer.

**Table 175**

**Example 31**

**Calling Line Identification (CLID) using the OLD CDR format**

N 001 05 A001009 DN4999 027.1.02.01 06/28 10:14 00:00:20 042 000 6135552222XXXXXX
N 001 04 T002010 DN5000 06/28 10:15 00:00:40 000 000 6135552222XXXXXX

**Table 176**

**Example 32**

**Calling Line Identification (CLID) using the NEW CDR format**

N 001 05 A001009 DN4999 06/28 10:14:00 00:00:20.0 &6135552222XXXXXX 027.1.02.01 042 000 &
N 001 04 T002010 DN5000 06/28 10:15:22 00:00:40 &6135552222XXXXXX &

**Note:** The CLID always equals 16 characters; it will fill in remaining characters with Xs.

## Calling Line Identification (CLID) on a tandem call

Table 177 "Example 33 Calling Line Identification (CLID) on a tandem call using the OLD CDR format" (page 216) gives an example of a tandem call in the Multi-Tenant Service environment with CLID using the OLD CDR format.

Table 178 "Example 34 Calling Line Identification (CLID) on a tandem call using the NEW CDR format" (page 216) gives an example of a tandem call in the Multi-Tenant Service environment with CLID using the NEW CDR format.

The call scenario for these examples is:

- DN 2616, at Node A, dials 7000, 7000 is a Directory Number on Node C. Nodes A and B have 7000 configured as a Coordinated Dialing Plan (CDP) Distant Steering Code (DSC). CDP at Node A is configured to route all calls to Node B on route 50, access code 8050. CDP at Node

B is configured to route all calls to Node C on route 51, access code 8051. CDPR and AIA are set to "YES" on all the Nodes.

The following records are output at all three nodes:

**Table 177**

**Example 33**

**Calling Line Identification (CLID) on a tandem call using the OLD CDR format**

Originating Node (Node A) record:
N 001 00 DN2616 A050005 06/26 13:16 00:00:22 A 80507000 000 000
Tandem Node (Node B) record:
N 001 01 A050005 A051005 06/26 13:16 00:00:22 A 80517000 000 000 2616XXXXXXXXXXXXXX
Terminating Node (Node C) record:
N 001 00 A051005 DN7000 06/26 13:16 00:00:22 000 000 2616XXXXXXXXXXXXXX

**Note:** The CLID always equals 16 characters; it fills in remaining characters with Xs.

## CDR with Outpulsed Digits

The Outpulsed Digits (OPD) option is most useful when a Location Code call overflows onto the public network. With the OPD enabled for these types of calls, it is much easier to match the calls with the appropriate toll charges, which are listed in the bill from the telephone company.

Table 179 "Example 35 OPD examples for a Location Code call that stays within ESN" (page 217) through Table 184 "Example 40 OPD examples for a call onto the public network" (page 219) show how the CDR output is affected by the OPD feature.

**Table 178**

**Example 34**

**Calling Line Identification (CLID) on a tandem call using the NEW CDR format**

Originating Node (Node A) record:
N 001 00 DN2616 A050005 06/26 13:16:00 00:00:22.0 A80507000 & 000 000 &

**Table 178****Example 34 Calling Line Identification (CLID) on a tandem call using the NEW CDR format (cont'd.)**

Tandem Node (Node B) record:	
N 001 01 A050005 A051005 06/26 13:16:00 00:00:22.0 A80517000	
&2616XXXXXXXXXXXXX 000	
000	
&	
Terminating Node (Node C) record:	
N 001 00 A051005 DN7000 06/26 13:16:00 00:00:22.0	
&2616XXXXXXXXXXXXX 000	
000	
&	

**Note 1:** In Table 179 "Example 35 OPD examples for a Location Code call that stays within ESN" (page 217), Table 180 "Example 36 OPD examples for a Location Code call that is routed to the public network" (page 217), and Table 181 "Example 37 OPD examples for a call onto the public network" (page 218), it makes no difference if the NARS package is equipped.

**Note 2:** When IFC = NI2 in LD 17 and OPD = YES in LD 16, 011 is not included in the DIGITS field for international calls and 0 is not included in the DIGITS field for operator assisted calls. To see dialed digits in CDR output, OPD must be set to NO in LD 16.

**Table 179****Example 35****OPD examples for a Location Code call that stays within ESN**

Digits dialed:	6 655 2315
Digits Outpulsed:	2315
Trunk Access Code:	457
Equipped Package:	BARS
When OPD is not used, DIGITS field = 4576552315	
When OPD = "NO" (disabled), DIGITS field = 4576552315	
When OPD = "YES" (enabled), DIGITS field = 4572315	

**Table 180****Example 36****OPD examples for a Location Code call that is routed to the public network**

Digits dialed:	6 655 2315
Digits Outpulsed:	14089882315
Trunk Access Code:	457
Equipped Package:	BARS
When OPD is not used, DIGITS field = 4576552315	

**Table 180****Example 36 OPD examples for a Location Code call that is routed to the public network (cont'd.)**

When OPD = "NO" (disabled), DIGITS field = 4576552315
When OPD = "YES" (enabled), DIGITS field = 45714089882315

**Table 181****Example 37****OPD examples for a call onto the public network**

Digits dialed:	6 408 988 2315
Digits Outpulsed:	14089882315
Trunk Access Code:	932
Equipped Package:	BARS
When OPD not used, DIGITS field = 9324089882315	
When OPD = "NO" (disabled), DIGITS field = 9324089882315	
When OPD = "YES" (enabled), DIGITS field = 93214089882315	

**Table 182****Example 38****OPD examples for a Location Code call that stays within ESN**

Digits dialed:	6 655 2315 :
Digits Outpulsed	2315
Trunk Access Code:	457
Equipped Package:	NARS (BARS not equipped)
When OPD is not used, DIGITS field = 66552315	
When OPD = "NO" (disabled), DIGITS field = 66552315	
When OPD = "YES" (enabled), DIGITS field = 66552315	

**Note:** If the Location Code is outpulsed, it appears twice in the CDR Digits field.

**Table 183****Example 39****OPD examples for a Location Code call that is routed to the public network**

Digits dialed:	6 655 2315
Digits Outpulsed:	14089882315
Trunk Access Code:	457
Equipped Package:	NARS (BARS not equipped)
When OPD is not used, Digits field = 66552315	
When OPD = "NO" (disabled), Digits field = 66552315	
When OPD = "YES" (enabled), Digits field = 645714089882315	

**Table 184**  
**Example 40**  
**OPD examples for a call onto the public network**

Digits dialed:	6 408 988 2315
Digits Outpulsed:	14089882315
Trunk Access Code:	932
Equipped Package:	NARS (BARS not equipped)
When OPD is not used, Digits field = 64089882315	
When OPD = "NO" (disabled), Digits field = 64089882315	
When OPD = "YES" (enabled), Digits field = 69321408988231	

## In-Band Automatic Number Identification

Table 185 "Example 41 In-Band ANI (IANI) using the OLD CDR format" (page 219) shows an example of a call with In-Band Automatic Number Identification (IANI) using the OLD CDR format.

Table 186 "Example 42 In-Band ANI (IANI) using the NEW CDR format" (page 219) shows an example of a call with In-Band Automatic Number Identification (IANI) using the NEW CDR format.

**Table 185**  
**Example 41**  
**In-Band ANI (IANI) using the OLD CDR format**

```
N 001 02 T000004 DN5000 03/24 10:15 00:00:38
4155551212XXXXXX
```

**Table 186**  
**Example 42**  
**In-Band ANI (IANI) using the NEW CDR format**

```
N 001 02 T000004 DN5000 03/24 10:15:22 00:00:38
&4155551212XXXXXX
&
```

**Note:** The ANI number is always 10 digits, filling in the remaining character spaces with XXXXXX.

## Feature Group D Automatic Number Identification

Table 187 "Example 43 Feature Group D ANI (FGD ANI) using the OLD CDR format" (page 220) shows an example of a call with Feature Group D Automatic Number Identification (FGD ANI) using the OLD CDR format.

Table 188 "Example 44 Feature Group D ANI (FGD ANI) using the NEW CDR format" (page 220) shows an example of a call with FGD ANI using the NEW CDR format.

**Table 187**  
**Example 43**  
**Feature Group D ANI (FGD ANI) using the OLD CDR format**

N 006 01 T096003 DN5000 03/24 10:15 00:00:02 A & 00-2142341234
---

**Table 188**  
**Example 44**  
**Feature Group D ANI (FGD ANI) using the NEW CDR format**

N 006 01 T096003 DN5000 03/24 10:15:22 00:00:02 A & 00-2142341234 &
---

## Abandoned Call

[Table 189 "Example 45 Abandoned call records" \(page 220\)](#) gives four examples of abandoned call records as output on the TTY.

The call scenario for this example is:

1. Route 12 member 8 makes an incoming call to DN 4322. DN 4322 rings for fifteen seconds prior to the trunk disconnecting.
2. Route 12 member 8 makes an incoming call. The call is queued for 34 seconds and then presented to the console. The attendant does not answer, after the trunk has been presented for 15 seconds the trunk disconnects.
3. Route 12 member 8 makes an incoming call. The call is queued for 38 seconds prior to the trunk disconnecting. The attendant DN dialed (ATTN DN or LDN) is 2222.
4. Route 12 member 8 makes an incoming call. The call is presented to an idle attendant. The attendant does not answer. After the call has been presented for 27 seconds, the trunk disconnects.

**Table 189**  
**Example 45**  
**Abandoned call records**

B 009 00 T012008 4322 26/02 12:22:50 &6671212121 &00:15
B 009 00 T012008 ATTN01 26/02 12:22:50 &6671212121 &00:15 00:49

**Table 189****Example 45 Abandoned call records (cont'd.)**

B 009 00 T012008 2222 26/02 12:22:50 &6671212121 & 00:38
B 009 00 T012008 ATTN01 26/02 12:22:50 &6671212121 &00:27

**Note:** The total time queuing is the total time in either the attendant or group hunt queue and the total ringing time.

**911 Abandoned Call**

Table 191 "Example 47 Call Transfer, Charge Account, and Time to Answer features" (page 222) gives examples of the ACD phone CDR N and Q records with the Call abandon feature activated. The sequence of events in the example is:

1. A 911 caller hangs up
2. The abandoned 911 call is placed in an ACD queue
3. The abandoned 911 is tagged as a "call abandon" by CDR in N and Q records
4. The abandoned 911 call is presented to an ACD agent
5. The ACD agent sees both ANI and ALI information on screen

**Table 190****Example 46****M911 Abandoned call records**

N 038 01 T081001 DN3434 00/06 06:22 00:00:14 05217201XXXXXXXXX ABANDON
Q 039 01 T081001 TN1840 00/06 06:22 00:00:18 05217201XXXXXXXXX ABANDON

**Call Transfer, Charge Account, and Time to Answer features**

Table 191 "Example 47 Call Transfer, Charge Account, and Time to Answer features" (page 222) gives an example involving the Call Transfer, Charge Account and Time to Answer features. The sequence of events in the example is:

1. DN 6789 enters account code 123451 and dials 9\*232-916-9166. The call is completed on route 0 member 6 and later transferred to DN

5600. The trunk is in the ringing state for 17 seconds before DN 5600 answers.

2. Later the call is transferred back to DN 6789 and terminated shortly after. DN 6789 rings for 40 seconds before answering the call.
3. An Account Code record is generated when the entry of the code is complete.
4. When the call is transferred, a Start record is generated.
5. When the second transfer takes place, no record is generated as a Start record already exists for the trunk in use.
6. When the call terminates, an End record is generated.

**Note 1:** DURATION is not supplied but must be calculated from the TIMESTAMP field of the S and E records.

**Note 2:** The identity of the intermediate party (DN 5600) is lost because an additional account code was not entered during or prior to the call transfer.

**Table 191**  
**Example 47**  
**Call Transfer, Charge Account, and Time to Answer features**

C 076 00 DN6789 T000006 09/08 11:15:10 123451 & &
S 081 00 DN6789 T000006 09/08 11:16:22 9*2329169166 & &00:17
E 097 00 T000006 DN6789 09/08 11:31:42 & &00:40

## Metered Transferred Call and Time to Answer

Table 192 "Example 48 Metered Transferred Call using the NEW CDR format with CDR Transfer Enhancement active" (page 223) gives an example involving a Metered Transferred Call and the Time to Answer feature with CDR Transfer Enhancement active.

The call scenario for this example is:

- DN 7234 places an outgoing call on metered CO route 4 member 16. After three minutes and eight seconds DN 7234 transfers the call to DN 7235. DN 7235 has Call Forward All Calls activated and set to

DN 5345. DN 5345 rings for two minutes and thirty seconds prior to answering the call.

- DN 5345 transfers the call to DN 5300, DN 5300 Call Forward No Answer set to 5346. The Call Forward No Answer timer is set to forward the call after 24 seconds. DN 5300 does not answer and after the Call Forward No Answer timer expires the call is forwarded to DN 5346. DN 5346 rings for 15 seconds prior to answering the call.
- DN 5346 then transfers the call to DN 5333. DN 5333 rings for nine seconds prior to answering.

**Table 192**  
**Example 48**

**Metered Transferred Call using the NEW CDR format with CDR Transfer Enhancement active**

S 008 00 DN7234 T004016 09/07 10:01:00 00:05:38.0 9660100 & 00029 000058 007.2.04.03 &
--

X 027 00 DN5345 T004016 09/07 10:06:38 00:04:25.0 & 00037 000074 &02:30N
--

X 044 00 DN5346 T004016 09/07 10:11:03 00:03:00.0 & 00003 000006 &00:39R
--

E 046 00 DN5333 T004016 09/07 10:14:03 00:09:55.0 & 00031 000062 &00:09
---

## Attendant CDR Enhancement for outgoing non-metered CO trunks

With the Attendant CDR Enhancement, E records are generated when the attendant originates an outgoing call and transfers it to an internal station. The records indicate the attendant as the originating party.

[Table 193 "Example 49 Transferred outgoing attendant originated trunk call record with Attendant CDR Enhancement with FCDR set to NEW" \(page 224\)](#) shows sample records for the Attendant CDR Transfer Enhancement using the NEW CDR format.

[Table 194 "Example 50 Transferred outgoing attendant originated trunk call record with Attendant CDR Enhancement with FCDR set to NEW and CDRX active" \(page 224\)](#) shows sample records for the Attendant CDR Enhancement using the NEW CDR format with the CDR Transfer Enhancement (CDRX) package (259) active, (that is, response to CDRX in LD 16 is "YES").

The call sequence for the following samples is:

1. Attendant establishes an outgoing call on trunk route 10 member 1.
2. The attendant is connected to the trunk for 30 minutes and then transfers the call to an internal station (DN 2020).
3. After being connected to the internal party for ten minutes the trunk disconnects.

**Table 193**

**Example 49**

**Transferred outgoing attendant originated trunk call record with Attendant CDR Enhancement with FCDR set to NEW**

S 050 00 ATTN01 T010001 02/17 01:00:00 00:30:00.0 9667610 & &
---

E 054 00 T010001 DN2020 02/17 01:40:00 00:10:00.0 & &
---

**Table 194**

**Example 50**

**Transferred outgoing attendant originated trunk call record with Attendant CDR Enhancement with FCDR set to NEW and CDRX active**

S 050 00 ATTN01 T010001 02/17 01:00:00 00:30:00.0 9667610 & &
---

E 054 00 DN2020 T010001 02/17 01:40:00 00:10:00.0 & &
---

## **CDR Call Transfer Enhancement**

The CDR Transfer Enhancement feature requires the CDRX package 259. CDRX allows Call Transfers involving nonmetered CO trunks to generate S, X, and E records.

With CDRX activated, (that is, response to CDRX prompt in LD 16 is "YES"), the information in the ORIGID and TERID fields for records involving transferred outgoing trunks has been updated. For these calls, the ORIGID contains the information for the internal party while the TERID contains the information for the trunk. Call Transfer CDR Transfer Enhancement is controlled on a per-route basis by the response to the CDRX prompt.

The following are samples of various transfer scenarios:

- Guarded Call Transfer record samples when FCDR is set to "OLD" in LD 17 are given in [Table 195 "Example 51 Guarded Call Transfer with FCDR set to OLD" \(page 226\)](#) samples of records when FCDR is set to "NEW" in LD 17 and CDRX is set to "NO" are given in [Table 196 "Example 52 Guarded Call Transfer with FCDR set to NEW and CDRX set to NO" \(page 226\)](#). Samples of records when FCDR is set to "NEW" and CDRX is set to "YES" in LD 16 are given in [Table 197 "Example 53 Guarded Call Transfer with FCDR set to NEW and CDRX set to YES" \(page 226\)](#).
- Unguarded Call Transfer record samples when FCDR is set to "OLD" in LD 17 are given in [Table 198 "Example 54 Unguarded Call Transfer with FCDR set to OLD" \(page 227\)](#). Samples of records when FCDR is set to "NEW" in LD 17 and CDRX is set to "NO" are given in [Table 199 "Example 55 Unguarded Call Transfer with FCDR set to NEW and CDRX set to NO" \(page 227\)](#). While samples of records when FCDR is set to "NEW" and CDRX is set to "YES" in LD 16 are given in [Table 200 "Example 56 Unguarded Call Transfer with FCDR set to NEW and CDRX set to YES" \(page 227\)](#).
- Multiple Call Transfer record samples when FCDR is set to "OLD" in LD 17 are given in [Table 201 "Example 57 Multiple Call Transfer with FCDR set to OLD" \(page 228\)](#). While samples of records when FCDR is set to "NEW" and CDRX is set to "YES" in LD 16 are given in [Table 202 "Example 58 Multiple Call Transfer with FCDR set to NEW and CDRX set to YES" \(page 228\)](#).

### **Simple guarded transfer**

The call sequence for the following samples is the following:

1. Internal station (DN 2020) establishes an outgoing call on nonmetered CO trunk route 10 member 1.
2. After two minutes, DN 2020 initiates call transfer to DN 2030.
3. DN 2030 rings for two minutes prior to answering.
4. DN 2030 answers and talks to the party on DN 2020 for one minute. Then DN 2020 completes the transfer (this is a guarded transfer scenario).
5. DN 2030 is now connected to the trunk. After talking to the trunk party for ten minutes, DN 2030 disconnects.

**Table 195****Example 51****Guarded Call Transfer with FCDR set to OLD**

S 050 00 DN2020 T010001 02/17 01:00:00 00:05:00 9667610
E 054 00 T010001 DN2030 02/17 01:15:00 00:10:00

**Table 196****Example 52****Guarded Call Transfer with FCDR set to NEW and CDRX set to NO**

S 050 00 DN2020 T010001 02/17 01:00:00 00:05:00.0 9667610 & &
E 054 00 T010001 DN2030 02/17 01:15:00 00:10:00.0 & &

**Table 197****Example 53****Guarded Call Transfer with FCDR set to NEW and CDRX set to YES**

S 050 00 DN2020 T010001 02/17 01:00:00 00:05:00.0 9667610 & &
E 054 00 DN2030 T010001 02/17 01:15:00 00:10:00.0 & &

**Simple unguarded transfer**

The call sequence for the following samples is:

1. Internal station (DN 2020) establishes an outgoing call on nonmetered CO trunk route 10 member 1.
2. After four minutes, DN 2020 initiates call transfer to DN 2030. While DN 2030 is still ringing, DN 2020 disconnects (this is an unguarded call transfer scenario).
3. DN 2030 rings for one minute prior to answering.
4. DN 2030 is now connected to the trunk. After talking to the trunk party for ten minutes, DN 2030 disconnects.

**Table 198**  
**Example 54**  
**Unguarded Call Transfer with FCDR set to OLD**

S 050 00 DN2020 T010001 02/17 01:00 00:04:00 9667610
E 054 00 T010001 DN2030 02/17 01:15 00:11:00

**Table 199**  
**Example 55**  
**Unguarded Call Transfer with FCDR set to NEW and CDRX set to NO**

S 050 00 DN2020 T010001 02/17 01:00:00 00:04:00.0 9667610 & &
E 054 00 T010001 DN2030 02/17 01:15:00 00:11:00.0 & &

**Table 200**  
**Example 56**  
**Unguarded Call Transfer with FCDR set to NEW and CDRX set to YES**

S 050 00 DN2020 T010001 02/17 01:00:00 00:04:00.0 9667610 & &
E 054 00 DN2030 T010001 02/17 01:15:00 00:11:00.0 & &

**Note:** In both the previous examples, the duration for DN 2030 also includes the time that DN 2030 was ringing.

### Multiple Call Transfers

The call sequence for the following samples is:

1. Internal station (DN 2020) establishes an outgoing call on nonmetered CO trunk route 10 member 1.
2. After two minutes, DN 2020 initiates call transfer to DN 2030.
3. DN 2030 answers and talks to party on DN 2020 for three minutes. DN 2020 then disconnects.
4. DN 2030 is now connected to the trunk. After talking to the trunk party for three minutes, DN 2030 initiates call transfer to DN 2040.
5. DN 2040 answers and talks to party on DN 2030 for three minutes. DN 2030 then disconnects.

6. DN 2040 is now connected to the trunk. After talking to the trunk party for two minutes, DN 2040 initiates call transfer to DN 2050. DN 2040 waits for two minutes while DN 2050 is ringing and finally disconnects.
7. DN 2050 rings for an additional three minutes and answers the call.
8. DN 2050 is now connected to the trunk. After talking to the trunk party for two minutes, DN 2050 disconnects.

**Table 201****Example 57****Multiple Call Transfer with FCDR set to OLD**

S 050 00 DN2020 T010001 02/17 01:00 00:05:00 9667610
E 054 00 T010001 DN2050 02/17 01:15 00:15:00

**Note:** In [Table 202 "Example 58 Multiple Call Transfer with FCDR set to NEW and CDRX set to YES" \(page 228\)](#), the duration for DN 2050 also includes the time that DN 2050 was ringing after DN 2040 had disconnected.

**Table 202****Example 58****Multiple Call Transfer with FCDR set to NEW and CDRX set to YES**

S 050 00 DN2020 T010001 02/17 01:00:00 00:05:00.0 9667610 & &
X 053 00 DN2030 T010001 02/17 01:11:00 00:06:00.0 & &
X 057 00 DN2040 T010001 02/17 01:15:00 00:04:00.0 & &
E 061 00 DN2050 T010001 02/17 01:20:00 00:05:00.0 & &

**CDR Call Transfer Enhancement with network calls**

Initial and subsequent transfers are recorded for metered trunks if Message Registration (MR) package 101 is equipped and for nonmetered trunks if CDR Transfer Enhancement (CDRX) package 259 is equipped and the response to the CDRX prompt in the Route Data Block (LD 16) is "YES".

### Simple network call

The records output at the tandem node for a simple network call with PPM CDRX advice are given in [Table 203 "Example 59 Simple network call with PPM or CDRX active" \(page 229\)](#).

Following is a simple network call scenario:

Station A (DN 2020) on Node 1 establishes an outgoing call on CO trunk route 10 member 1, which is either a metered route or has CDRX set to "YES" in its Route Data Block, on Node 2 for a duration of fifteen minutes. CO trunk route 10 is either a metered route or has CDRX set to "YES" in its Route Data Block (LD 16). Node 2 is connected to Node 1 by TIE route 1.

**Table 203**  
**Example 59**  
**Simple network call with PPM or CDRX active**

```
N 054 00 T001001 T010001 02/17 01:15:00 00:15:00.0
& 00075 000375
& 2020XXXXXXXXXXXXXX
```

**Note:** In [Table 203 "Example 59 Simple network call with PPM or CDRX active" \(page 229\)](#), the fields in the second line are output only if the CO routes is metered and the BLID field is always output as 16 characters. The field is padded to 16 characters with Xs.

### Network Call Transfer

Following are Network Call Transfer scenarios. The scenarios are:

- Simple Network Call Transfer examples are shown in [Table 204 "Example 60 Simple Network Call Transfer case 1" \(page 230\)](#) and [Table 205 "Example 61 Simple Network Call Transfer case 2" \(page 231\)](#).
- Multiple Network Call Transfer examples are shown in ["Feature interactions" \(page 50\)](#), [Table 207 "Example 63 Multiple Network Call Transfer case 2" \(page 233\)](#), and [Table 208 "Example 64 Multiple Network Call Transfer case 2" \(page 234\)](#).

### Simple Network Call Transfer case 1

The call sequence for the following samples is:

1. Station A (DN 3020) on Node 2 establishes an outgoing call on CO trunk route 10 member 1 on Node 2. CO trunk route 10 is either a

metered route or has CDRX set to "YES" in its Route Data Block (LD 16).

2. After two minutes, station A (DN 3020) on Node 2 initiates call transfer over an ISDN MCDN link (trunk route 20 member 2) to station B (DN 2020) on Node 1. Station B (DN 2020) rings for two minutes and then station A (DN 3020) disconnects.
3. Station B (DN 2020) on Node 1 rings for another three minutes and then answers the call.
4. Station B (DN 2020) on Node 1 is now connected to the outgoing CO trunk on Node 2. After talking to the trunk party for ten minutes, station B disconnects.

**Table 204**  
**Example 60**  
**Simple Network Call Transfer case 1**

S 050 00 DN3020 T010001 02/17 01:00:00 00:05:00.0 9667610 & 00025 000050 &
E 054 00 T020002 T010001 02/17 01:20:00 00:10:00.0 & 00050 000100 & 2020XXXXXXXXXXXXX

**Note:** In [Table 204 "Example 60 Simple Network Call Transfer case 1" \(page 230\)](#), the fields in the second line are output only if the CO routes are metered and the BLID field is always output as 16 characters. The field is padded to 16 characters with Xs.

### Simple Network Call Transfer case 2

The call sequence for the following samples is:

1. Station A (DN 2020) on Node 1 establishes an outgoing call on CO trunk route 10 member 1 on Node 2. CO trunk route 10 is either a metered route or has CDRX set to "YES" in its Route Data Block (LD 16). The outgoing call involves station A (DN 2020) using ISDN MCDN link (trunk route 20 member 2) to access Node 2. From Node 2 the outgoing CO trunk route is used.
2. After two minutes, station A (DN 2020) Node 1 initiates call transfer to station B (DN 2030) on Node 1. Station B (DN 2030) on Node 1 rings for two minutes and then station A (DN 2020) on Node 1 disconnects.
3. Station B (DN 2030) on Node 1 rings for another three minutes and then answers the call.
4. Station B (DN 2030) on Node 1 is now connected to the outgoing CO trunk on Node 2. After talking to the trunk party for ten minutes, station B disconnects.

**Table 205**  
**Example 61**  
**Simple Network Call Transfer case 2**

S 050 00 T020002 T010001 02/17 01:00:00 00:04:00.0 9667610 & 00020 000040 & 2020XXXXXXXXXXXXXX
E 054 00 T020002 T010001 02/17 01:15:00 00:11:00.0 & 00055 000110 & 2030XXXXXXXXXXXXXX

**Note:** In Table 205 "Example 61 Simple Network Call Transfer case 2" (page 231), the fields in the second line are output only if the CO routes is metered and the BLID field is always output as 16 characters. The field is padded to 16 characters with Xs.

### Multiple Network Call Transfer case 1

The call sequence for the following samples is:

1. Station A (DN 3020) on Node 2 establishes an outgoing call on CO trunk route 10 member 1 on Node 2. CO trunk route 10 is either a metered route or has CDRX set to "YES" in its Route Data Block (LD 16).
2. After two minutes, station A (DN 3020) on Node 2 initiates call transfer over an ISDN MCDN link (trunk route 20 member 2) to station B (DN 2020) on Node 1.
3. Station B (DN 2020) on Node 1 answers and talks to party on station A (DN 3020) for three minutes. Station A (DN 3020) then disconnects.
4. Station B (DN 2020) on Node 1 is now connected to the outgoing CO trunk on Node 2. After talking to the trunk party for three minutes, station B (DN 2020) on Node 1 initiates call transfer to station C (DN 2030) on Node 1.
5. Station C (DN 2030) on Node 1 answers and talks to party on station B (DN 2020) on Node 1 for three minutes. Station B (DN 2020) on Node 1 then disconnects.
6. Station C (DN 2030) on Node 1 is now connected to the outgoing CO trunk on Node 2. After talking to the trunk party for two minutes, station C (DN 2030) on Node 1 initiates call transfer to station D (DN 2040) on Node 1. Station C (DN 2030) on Node 1 waits for two minutes while station D (DN 2040) on Node 1 is ringing and finally disconnects.

7. Station D (DN 2040) on Node 1 rings for an additional three minutes and answers the call.
8. Station D (DN 2040) on Node 1 is now connected to the CO trunk on Node 2. After talking to the trunk party for two minutes, station D (DN 2040) on Node 1 disconnects.

**Note:** In [Table 206 "Example 62 Multiple Network Call Transfer case 1"](#) (page 232), the fields in the second line are output only if the CO routes is metered and the BLID field is always output as 16 characters. The field is padded to 16 characters with Xs.

**Table 206**  
**Example 62**  
**Multiple Network Call Transfer case 1**

S 050 00 DN3020 T010001 02/17 01:00:00 00:05:00.0 9667610 & 00025 000075 &
X 053 00 T020002 T010001 02/17 01:11:00 00:06:00.0 & 00030 000090 & 2020XXXXXXXXXXXXX
X 054 00 T020002 T010001 02/17 01:15:00 00:04:00.0 & 00020 000060 & 2030XXXXXXXXXXXXX
E 061 00 T020002 T010001 02/17 01:20:00 00:05:00.0 & 00025 000075 & 2040XXXXXXXXXXXXX

### Multiple Network Call Transfer case 2

The call sequence for the following samples is:

1. Station A (DN 2020) on Node 1 establishes an outgoing call on CO trunk route 10 member 1 on Node 2. CO trunk route 10 is either a metered route or has CDRX set to "YES" in its Route Data Block (LD 16). The outgoing call involves station A (DN 2020) using ISDN MCDN link (trunk route 20 member 2) to access Node 2. From Node 2 the outgoing CO trunk route is used.
2. After two minutes, station A (DN 2020) Node 1 initiates call transfer to station B (DN 2030) on Node 1.
3. Station B (DN 2030) on Node 1 answers and talks to party on station A (DN 2020) Node 1 for three minutes. Station A (DN 2020) on Node 1 disconnects.
4. Station B (DN 2030) on Node 1 is now connected to the outgoing CO trunk on Node 2. After talking to the trunk party for three minutes, station B (DN 2030) on Node 1 initiates call transfer to station C (DN 2030) on Node 1.

5. Station C (DN 2040) on Node 1 answers and talks to party on station B (DN 2030) on Node 1 for three minutes. Station B (DN 2030) on Node 1 then disconnects.
6. Station C (DN 2040) on Node 1 is now connected to the outgoing CO trunk on Node 2. After talking to the trunk party for two minutes, station C (DN 2040) on Node 1 initiates call transfer to station D (DN 2050) on Node 1. Station C (DN 2040) on Node 1 waits for two minutes while station D (DN 2050) on Node 1 is ringing and finally disconnects.
7. Station D (DN 2050) on Node 1 rings for an additional three minutes and answers the call.
8. Station D (DN 2050) on Node 1 is now connected to the CO trunk on Node 2. After talking to the trunk party for two minutes, station D (DN 2050) on Node 1 disconnects.

**Table 207**  
**Example 63**  
**Multiple Network Call Transfer case 2**

S 050 00 T020002 T010001 02/17 01:00:00 00:05:00.0 9667610 & 00025 000075 & 2020XXXXXXXXXXXXXX
X 053 00 T020002 T010001 02/17 01:11:00 00:06:00.0 & 00030 000090 & 2030XXXXXXXXXXXXXX
X 057 00 T020002 T010001 02/17 01:15:00 00:04:00.0 & 00020 000060 & 2040XXXXXXXXXXXXXX
E 061 00 T020002 T010001 02/17 01:20:00 00:05:00.0 & 00025 000075 & 2050XXXXXXXXXXXXXX

**Note:** In Table 207 "Example 63 Multiple Network Call Transfer case 2" (page 233), the fields in the second line are output only if the CO routes is metered and the BLID field is always output as 16 characters. The field is padded to 16 characters with Xs.

### Multiple Network Call Transfer case 3

The call sequence for the following samples is:

1. Station A (DN 2020) on Node 1 establishes an outgoing call on CO trunk route 10 member 1 on Node 2. CO trunk route 10 is either a metered route or has CDRX set to "YES" in its Route Data Block (LD 16). The outgoing call involves station A (DN 2020) using ISDN MCDN

- link (trunk route 20 member 2) to access Node 2. From Node 2, the outgoing CO trunk route is used.
2. After two minutes, station A (DN 2020) Node 1 initiates call transfer to station B (DN 2030) on Node 1.
  3. Station B (DN 2030) on Node 1 answers and talks to party on station A (DN 2020) Node 1 for three minutes. Station A (DN 2020) on Node 1 disconnects.
  4. Station B (DN 2030) on Node 1 is now connected to the outgoing CO trunk on Node 2. After talking to the trunk party for three minutes, station B (DN 2030) on Node 1 initiates call transfer to station C (DN 2040) on Node 1.
  5. Station C (DN 2040) on Node 1 answers and talks to party on station B (DN 2030) on Node 1 for three minutes. Station B (DN 2030) on Node 1 then disconnects.
  6. Station C (DN 2040) on Node 1 is now connected to the outgoing CO trunk on Node 2. After talking to the trunk party for two minutes, station C (DN 2040) on Node 1 initiates call transfer to station D (DN 3010) on Node 2. Station C (DN 2040) on Node 1 waits for two minutes while station D (DN 3010) on Node 2 is ringing and finally disconnects.
  7. Station D (DN 3010) on Node 2 rings for an additional three minutes and answers the call.
  8. Station D (DN 3010) on Node 2 is now connected to the CO trunk on Node 2. After talking to the trunk party for two minutes, station D (DN 3010) on Node 2 disconnects.

**Table 208**  
**Example 64**  
**Multiple Network Call Transfer case 2**

S 050 00 T020002 T010001 02/17 01:00:00 00:05:00.0 9667610 & 00025 000075 & 2020XXXXXXXXXXXXXX
X 053 00 T020002 T010001 02/17 01:11:00 00:06:00.0 & 00030 000090 & 2030XXXXXXXXXXXXXX
X 057 00 T020002 T010001 02/17 01:15:00 00:04:00.0 & 00020 000060 & 2040XXXXXXXXXXXXXX
E 061 00 T020002 T010001 02/17 01:20:00 00:05:00.0 & 00025 000075 & 3010XXXXXXXXXXXXXX

**Note 1:** In [Table 208 "Example 64 Multiple Network Call Transfer case 2" \(page 234\)](#), the fields in the second line are output only if the CO routes are metered and the BLID field is always output as 16 characters. The field is padded to 16 characters with Xs.

**Note 2:** Since there is no Trunk Route Optimization (TRO) involved, the TIE trunk between Node 1 and Node 2 still remains. Therefore, the E (End) record in [Table 208 "Example 64 Multiple Network Call Transfer case 2" \(page 234\)](#) shows the originating party as the TIE route and member number.

## Station Activity Record

The Station Activity Call Detail Recording (SCDR) feature generates "D" records for any trunk involved in a call with a phone assigned CDMA class of service.

Example [Table 209 "Example 65 Outgoing Station Activity call record" \(page 235\)](#) is for a CDMA Class of Service phone making an outgoing call on a route that does not generate CDR records. The call scenario is:

- Phone A (DN 5404) with CDMA Class of Service assigned makes an outgoing call on route 64 member 15 for a duration of 22 minutes. The following record is output when the connection is released.

**Table 209**  
**Example 65**  
**Outgoing Station Activity call record**

```
D 128 00 DN5404 T064015 05/22 01:00:00 00:22:00.0 8467327
&
&
```

Example [Table 210 "Example 66 Incoming Station Activity call record" \(page 235\)](#) is for a CDMA class of service phone receiving an incoming trunk call from a route that does not generate CDR records. The call scenario is:

- Phone A (DN 5404) with CDMA Class of Service assigned receives an incoming trunk call on route 72 member 32 for a duration of 7 minutes. The following record is output when the connection is released.

**Table 210**  
**Example 66**  
**Incoming Station Activity call record**

```
D 049 31 T072032 DN5404 11/06 23:53:42 00:07:00.0
&
&
```

## Public Network Feature Invocation Record

"Y" (Public Network Feature Invocation) records are generated when a system user accesses a Public Network feature such as "PSTN Three Party Conferencing".

Example [Table 211 "Example 67 Outgoing Station Activity call record" \(page 236\)](#) is for a phone making an outgoing call on a route that has CDRY set to "YES" and that invokes three party conference using the "PSTN Three Party Conferencing" feature of a NEAX-61. The call scenario is:

- Phone A (DN 5404) makes an outgoing call on route 64 member 15. After 6 minutes, phone A issues a Trunk Hook-switch Flash to invoke the "PSTN Three Party Conferencing" feature and dials phone B (768492). When phone B answers, phone A issues another Trunk Hook-switch Flash to form a three party conference. A "Y" record is produced at this point in the call.
- After conferring for 16 minutes, all parties disconnect. At this point an "N" record is produced.

**Table 211**  
**Example 67**  
**Outgoing Station Activity call record**

Y 127 00 DN5404 T064015 05/22 01:06:00 00:06:00.0 768492
&
&
N 128 00 DN5404 T064015 05/22 01:00:00 00:22:00.0 8467327
&
&

## CDR 100 Hour Call

The Call Detail Recording 100 Hour Call feature expands the Call Detail Recording (CDR) duration measurement capability to accommodate calls with a duration greater than 99:59:59.

This feature provides a 100 Hour Duration field. This field is automatically displayed on the third line of all current Fixed Format CDR record types that have the duration field even though the call may be less than or greater than 99:59:59

The following three examples show Format CDR Records with durations less than, equal to, and greater than 100:00:00.

In Table 212 "Example 68 CDR 100 Hour Call Field with call duration less than 100:00:00" (page 237), DN 2020 made a TIE call through route 2. The duration of the call is 99:59:58, so only the Duration field in the first line is shown with the time while the 100-Hour Duration field contains zeros.

In Table 213 "Example 69 CDR 100 Hour Call Field with call duration equal to 100:00:00" (page 237), the duration of the call is 100:00:00. Hence, the Duration field on line 1 resets to 00:00:00 and the 100-Hour Duration field on line 3 contains 001, indicating 100 hours.

In Table 214 "Example 70 CDR 100 Hour Call Field with call duration greater than 100:00:00" (page 237), the call was established for the duration of 4724:32:20. Hence, the Duration field contains 24:32:20 and the 100-Hour Duration field contains 047, representing four thousand and seven hundred.

**Table 212**  
**Example 68**  
**CDR 100 Hour Call Field with call duration less than 100:00:00**

N 005 02 2020 T002001 04/17 19:45:54 99:59:58.0 A80023033010#
& 000 000
& 000

**Table 213**  
**Example 69**  
**CDR 100 Hour Call Field with call duration equal to 100:00:00**

N 005 02 2020 2030 04/17 19:45:54 00:00:00.0 A80023033010#
& 000 000
& 001

**Table 214**  
**Example 70**  
**CDR 100 Hour Call Field with call duration greater than 100:00:00**

N 005 02 2020 2030 04/17 19:45:54 24:32:20.0 A80023033010#
& 000 000
& 047





Nortel Communication Server 1000

## Call Detail Recording Fundamentals

Copyright © 2007-2008 Nortel Networks  
All Rights Reserved.

Release: 5.5  
Publication: NN43001-550  
Document revision: 02.05  
Document release date: 20 November 2008

To provide feedback or to report a problem in this document, go to [www.nortel.com/documentfeedback](http://www.nortel.com/documentfeedback).

[www.nortel.com](http://www.nortel.com)  
Sourced in Canada

### LEGAL NOTICE

While the information in this document is believed to be accurate and reliable, except as otherwise expressly agreed to in writing NORTEL PROVIDES THIS DOCUMENT "AS IS" WITHOUT WARRANTY OR CONDITION OF ANY KIND, EITHER EXPRESS OR IMPLIED. The information and/or products described in this document are subject to change without notice.

Nortel, the Nortel Logo, the Globemark, SL-1, Meridian 1, and Succession are trademarks of Nortel Networks.

All other trademarks are the property of their respective owners.

